

Inverter Driven Heat Pump

24,000 BTU Multi Zone System

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

Operate as few as one indoor unit or all indoor units
 Mix & match from 4 indoor unit styles
 Blue-fin condenser coil coating



MODEL NUMBERS

Outdoor Unit	AOU24RLXFZ
System	24RLXFZ

EFFICIENCIES

Indoor Unit Type	Non - Ducted	Ducted	Mix
SEER	18	15.5	16.75
SEER2	18.5	16	17.25
EER	12.5	10.6	11.55
EER2	12.5	10.6	11.55
HSPF	9.5	9.0	9.3
HSPF2	8.7	8.5	8.6
COP	4.04	3.42	3.73
COP	Btu/hW 13.8	11.7	12.7
COP2	4.04	3.42	3.73
COP2	Btu/hW 13.8	11.7	12.7

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(*C)	14 to 115 (-10 to 46)
Heating		5 to 75 (-15 to 24)

CAPACITIES

Total Capacity Range	Rated	Btu/h	14,000 - 27,000
Cooling	Min.-Max.		22,000
			6,100 - 27,000
Heating	Rated		24,000
	Min.-Max.		6,800 - 29,800

LINESET REQUIREMENTS

Connection Method	Flare		
Liquid	in (mm)	Ø1/4 (Ø6.35) × 3	
Gas		Ø3/8 (Ø9.52) × 2 + Ø1/2 (Ø12.7) × 1	
Pre-charge length (Total)		ft (m)	98 (30)
Max. length (Total)			164 (50)
Max. length (Each)			82 (25)
Min. length (Total)			49 (15)
Min. length (Each)			16 (5)
Max. height difference			49 (15)
Max. height difference between indoor units		33 (10)	

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in (mm)	27-9/16 × 35-7/16 × 13 (700 × 900 × 330)
Gross (H x W x D)		34-1/16 × 41-5/16 × 17-1/2 (865 × 1,050 × 445)
Net Weight	lb (kg)	124 (56)
Gross Weight		141 (64)

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

SOUND PRESSURE

Outdoor Unit	Cooling	Heating	dB (A)
			51
			52

FAN DATA

Outdoor Unit	Cooling	Heating	CFM (m3/h)
Airflow rate			1,942 (3,300)
			1,942 (3,300)

ELECTRICAL SPECIFICATIONS

Indoor Unit Type	Non - Ducted	Ducted	Mix	
Voltage/Frequency/Phase	1Ø 208/230 V 60 Hz			
Available Voltage Range	187-264V			
Current	Cooling	7.7	9.1	8.4
	Heating	7.6	9	8.3
Maximum Operating Current	13.7			
Starting current	9			
MCA	A			
Maximum Circuit Breaker	17			
Rated Input Power	Cooling	1.76	2.08	-
	Heating	1.73	2.05	-
Max. Input Power	Cooling	2.6	2.84	-
	Heating	2.93	2.93	-


Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Effective Date: 1/10/2023

CONNECTABLE INDOOR UNITS

TYPE	Slim Duct (ADUH)
	Wall Mount (ASU/ASUH)
	Compact Cassette (ACUH)
	Floor Mount (AGU)
NUMBER	2 to 3
DIMENSIONS:	

Units: In. (mm)

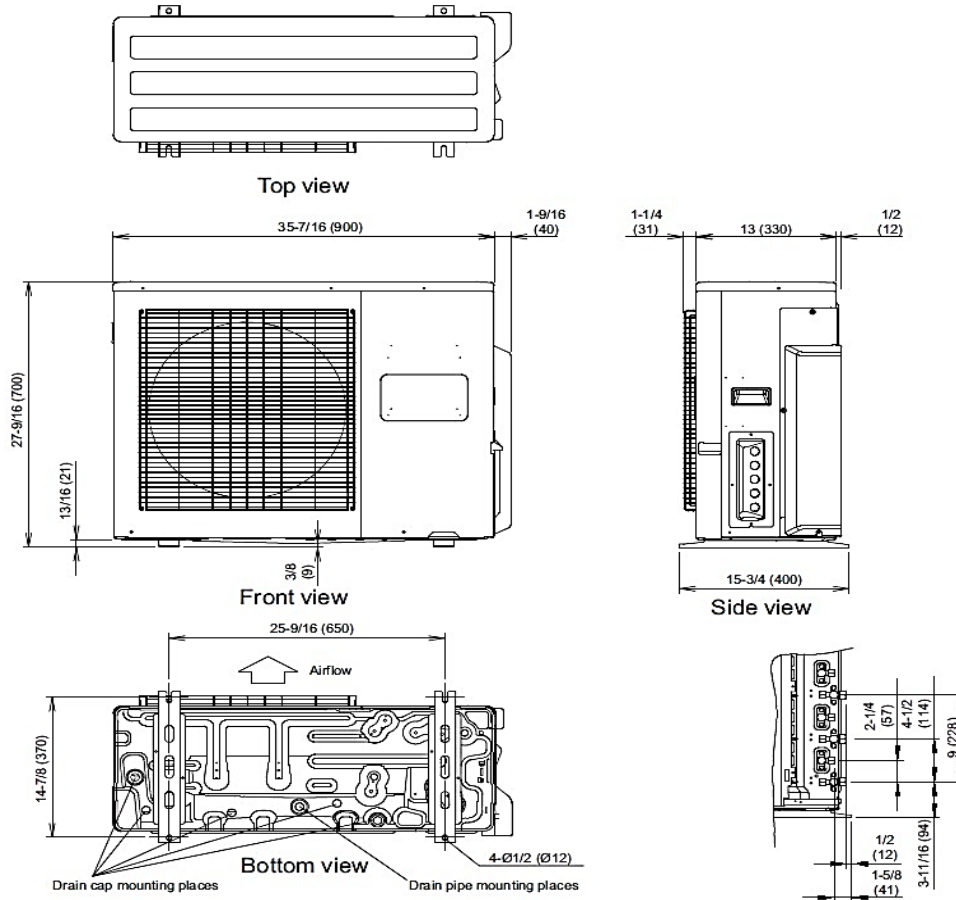

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2022 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).