

# SUBMITTAL - 24KWAH3


Job Name: \_\_\_\_\_

Date: \_\_\_\_\_

Location: \_\_\_\_\_

**R32**

Outdoor Unit: **AOUH24KWAH3**

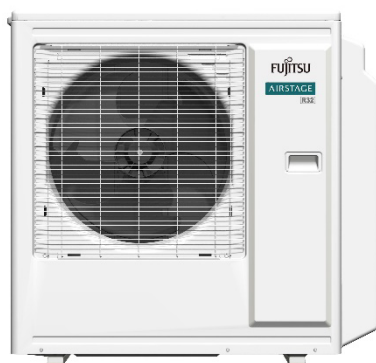

**XLTH**

## FEATURES

### MULTI-ZONE OUTDOOR UNIT:

- Multi-zone outdoor Unit with a connectable capacity of up to 130%
- Supports connection of up to 3 indoor units
- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Operates efficiently with heating down to -15°F (-26°C) and cooling up to 122°F.
- Built-in base pan heater prevents ice buildup for uninterrupted operation in freezing temperatures.
- Efficiently delivers comfort with capacities ranging from 14,000 to 31,000 BTU
- Blue Fin-coated heat exchanger for improved corrosion resistance and coil durability
- Super quiet operation with sound levels as low as 50dB
- Common indoor units compatible with single and multi-zone systems: Compact Cassette, Mid Static Duct, Slim Duct, and Wall-Mount.
- Current limit function, allowing precise control to meet specific power requirements.
- Built-in safety features, including circuit protection, fan motor protection, and compressor protection, ensuring reliable operation and long-lasting durability
- Compact outdoor unit with extended line set lengths up to 230ft (70m)



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250409A

## SUBMITTAL - 24KWAH3

### SPECIFICATIONS:

Outdoor Unit					AOUH24KWAH3		
System Name					24KWAH3		
AHRI Number					215447693		
SEER2	Wall Mounted	Cooling		Btu/hW	23.5		
	Duct				20.5		
	Mixed				22		
EER2	Wall Mounted	Cooling	Rated	Btu/hW	13.5		
	Duct				12.5		
	Mixed				13		
COP2	Wall Mounted	Heating	kW/kW	kW/kW	4.7		
	Duct				4.2		
	Mixed				4.44		
HSPF 2 (IV) / HSPF 2 (V)	Wall Mounted	Heating	Heating	Btu/hW	11.5 / 9		
	Duct				10.5 / 8.5		
	Mixed				11 / 8.7		
Outdoor Operation Range		Cooling		°F (°C)	14 TO 122 (-10 TO 50)		
		Heating			-15 TO 75 (-26 TO 24)		
Outdoor Connection pipe	Size × Qty	Liquid		in (mm)	Ø1/4 (Ø6.35) × 2+Ø1/4 (Ø6.35) × 1		
		Gas			Ø3/8 (Ø9.52) × 2+Ø1/2 (Ø12.70) × 1		
	Method				FLARE		
	Pre-charge length (Total)				ft (m)	98 (30)	
	Min. length	Total		33 (10)			
		Each		16 (5)			
	Max. length	Total		230 (70)			
		Each		82 (25)			
	Additional charge				oz/ft (g/m)	0.22 (20)	
Outdoor Dimensions (H × W × D)		Net		in (mm)	34-13/16 × 32-5/16 × 12-3/8 (884 × 820 × 315)		
		Gross			41-5/8 × 40-7/16 × 17-1/2 (1,058 × 1,027 × 445)		
Outdoor Weight		Net		lb (kg)	119 (54)		
		Gross			139 (63)		
Outdoor Fan	Airflow rate	Cooling		CFM (m³/h)	1,530 (2,600)		
		Heating			1,413 (2,400)		
	Type × Qty				PROPELLER × 1		
	Motor output				W	49	
Outdoor Sound Pressure Level*4		Cooling		dB (A)	50		
		Heating			52		

## SUBMITTAL - 24KWAH3

### SPECIFICATIONS:

Outdoor Refrigerant	Type		R32
	Charge	lb (g)	3 lb 15 oz (1800)
Outdoor Refrigerant Oil	Type		RMM68AF
	Amount	in <sup>3</sup> (cm <sup>3</sup> )	48.8 (800)
Power Supply			1Ø, 208/230 V~ 60 HZ
Available Voltage Range			187—253 V
Maximum Operating Current* <sup>3</sup>		A	19.2
Outdoor Starting Current		A	7.9
MCA* <sup>5</sup>			23.6
Wiring spec.* <sup>6</sup>	MAX. CKT. BKR* <sup>7</sup>		25
Energy Star* <sup>8</sup>			ES, ESCC, ESME

#### NOTES:

- \*4:  
Indoor Sound Pressure Level – Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level – Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- \*3:  
Maximum Operating Current – Maximum current is maximum value when operated within the operation range.  
– The total current of indoor unit and outdoor unit.
- MCA – \*5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)
- Wiring spec. – \*6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.  
As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.
- MAX. CKT. BKR – \*7: Maximum Circuit Breaker
- Energy Star – \*8 : ES = Energy Star, ESCC = Energy Star Cold Climate, ESME= Energy Star Most Efficient.

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

# SUBMITTAL - 24KWAH3

## OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

