

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

ARCHITECT \_\_\_\_\_


ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

## Multi-Zone Outdoor Unit (ODU): DRA6H55M2A

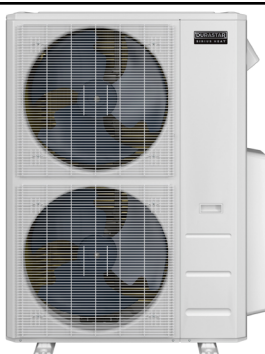

### PRODUCT FEATURES

- High heating capacity at 0°F
- Variable speed inverter compressor
- Low ambient heating and cooling down to -22°F
- Quiet operation
- Included base pan heater
- Auto restart
- Anti-corrosive coil coating
- A2L refrigerant detection system
- Electronic refrigerant shut-off valve
- Port adaptors included

EFFICIENCY DATA	DUCTLESS	MIXED	DUCTED
SEER2	21.40	20.70	20.00
EER2	12.00	11.85	11.70
HSPF2	10.60	10.65	10.70
COP at 47°F (8°C) <sup>2</sup>	3.40	3.55	3.70
COP at 17°F (-8°C) <sup>3</sup>	2.60	2.65	2.70
COP at 5°F (-15°C) <sup>4</sup>	2.00	2.05	2.10

### SYSTEM DATA

Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	151.7 (4.3)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

CAPACITIES		DUCTLESS	MIXED	DUCTED
Cooling (BTU/hr)	Rated at 95°F (35°C) <sup>1</sup>	51000	52500	53000
	at 109°F (43°C)	42000	44000	46000
	at 5°F (-15°C)	61000	61500	62000
	Minimum	19000	19000	19000
	Maximum	58000	59000	60000
Heating (BTU/hr)	Rated at 47°F (8°C) <sup>2</sup>	55000	55000	55000
	Rated at 17°F (-8°C) <sup>3</sup>	45000	45000	45000
	Rated at 5°F (-15°C) <sup>4</sup>	48000	48000	48000
	at -13°F (-25°C)	31000	30700	30400
	at -22°F (-30°C)	27400	26300	25200
	Minimum	20000	20000	20000
	Maximum	56000	58500	61000
Nominal ODU Capacity <sup>5</sup>		55000		





## SIRIUS HEAT™

# 55,000 BTU/H SIRIUS HEAT MULTI-ZONE HEAT PUMP

SPECIFICATIONS-DRA6H55M2A

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	6 x Ø1/4 (Ø6.35)
Gas (in. (mm))	4 x Ø3/8 (Ø9.52) 2 x Ø1/2 (Ø12.70)
Refrigeration Adaptors Included (in)	2 x 1/4 → 3/8 1 x 3/8 → 1/2 2 x 1/2 → 3/8 2 x 1/2 → 5/8
Minimum Indoor Units Connected	2
Pre-Charge Length/ Zone (ft. (m))	25 (7.5)
Maximum Length (combined IDUs) (ft. (m))	262 (80)
Maximum Length (per IDU) (ft. (m))	115 (35)
Minimum Length (per IDU) (ft. (m))	10 (3)
Max. Height Differential between IDU and ODU (ft. (m))	49 (15)
Max. Height Differential between IDUs (ft. (m))	33 (10)
Additional Refrigerant for Ø1/4" Liquid Pipe (oz./ft (g/m))	.16 (15)
Additional Refrigerant for Ø3/8" Liquid Pipe (oz./ft (g/m))	.32 (30)

ELECTRICAL DATA	DUCTLESS	DUCTED
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	40	
Minimum Circuit Ampacity (Amps)	39.5	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) <sup>1</sup>	18.7	21.0
Rated Current - Heating (Amps) <sup>2</sup>	21.2	19.5

<sup>1</sup> Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

<sup>2</sup> Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)

<sup>3</sup> Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)

<sup>4</sup> Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)

<sup>5</sup> If the total indoor unit load exceeds the nominal capacity of the outdoor unit, the practical output capacity of each indoor unit will be correspondingly reduced. This situation is very evident during heating mode.

OUTDOOR UNIT DATA		
Unit Dimensions (in. (mm))	Width	37-1/2 (952)
	Depth	16-5/16 (415)
	Height	52-1/2 (1333)
Carton Dimensions (in. (mm))	Width	43-1/8 (1095)
	Depth	19-1/2 (495)
	Height	58-1/4 (1480)
Net Weight (lbs. (kg))	246.5 (111.8)	
Gross Weight (lbs. (kg))	276.7 (125.5)	
Cooling Operating Temp. (°F (°C))	-22 - 122 (-30 - 50)	
Heating Operating Temp. (°F (°C))	-22 - 75 (-30 - 24)	
Airflow (CFM)	4503	
Sound Pressure (dB(A))	65	
Fan Speed (r/min)	Low	650
	Med	700
	High	800
Fan Motor Current Type	DC	


COMPRESSOR	
Type	DC Inverter Twin Cylinder Rotary
Oil Type	VG75
Oil Charge (oz.(ml))	44 (1300)

Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC

www.durastar.com

**Clearances**

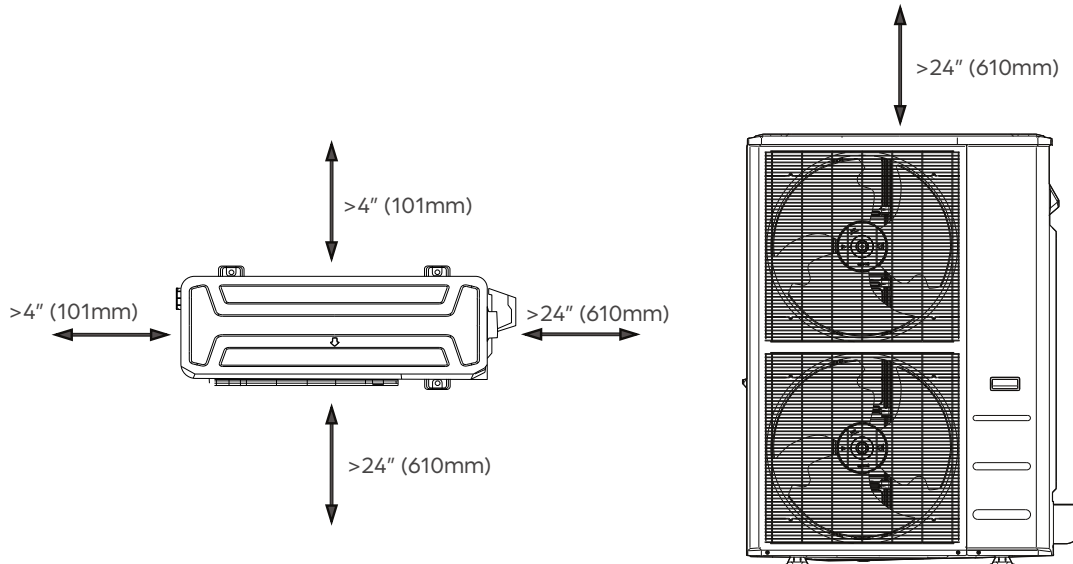

**Dimensions**

