



18,000 BTU/H CEILING CASSETTE

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____


ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

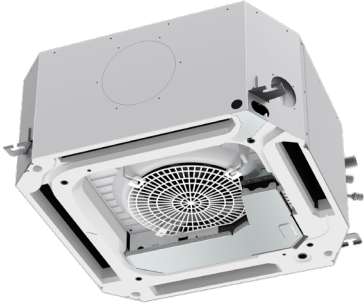Indoor Unit (IDU): DRAC18F2A	Panel: DRACPANA2A*	Wireless Remote Control
		

PRODUCT FEATURES

- High efficiency SEER2 rating, up to 20.7
- Single or Multi-zone compatible
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Compatible with DRSTAT101 wired thermostat
- *Panel sold separately

LINE SET REQUIREMENTS

Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø1/2 (Ø12.70)

DIMENSIONS AND WEIGHT

Unit Dimensions (in. (mm))	Width	22-7/16 (570)
	Depth	22-7/16 (570)
	Height	9-5/8 (245)
Carton Dimensions (in. (mm))	Width	28-3/16 (715)
	Depth	25-1/4 (640)
	Height	11-5/8 (295)
Net Weight (lbs. (kg))	35.3 (16.0)	
Gross Weight (lbs. (kg))	41.9 (19.0)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	16800	
Heating Capacity (BTU/hr)	19000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	147 (250)
	Low	194 (330)
	Medium	318 (540)
	High	389 (660)
	Turbo	447 (760)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø1 (Ø25)	
Drain Pump Lift (in. (mm))	29-1/2 (750)	
Sound Pressure (dB(A))	Silent	25
	Low	29
	Medium	41
	High	44
	Turbo	48



Specifications are subject to change without notice.


© 2025 Ferguson Enterprises LLC

www.durastar.com



18,000 BTU/H CEILING CASSETTE

IDU DIMENSIONS - DRAC18F2A

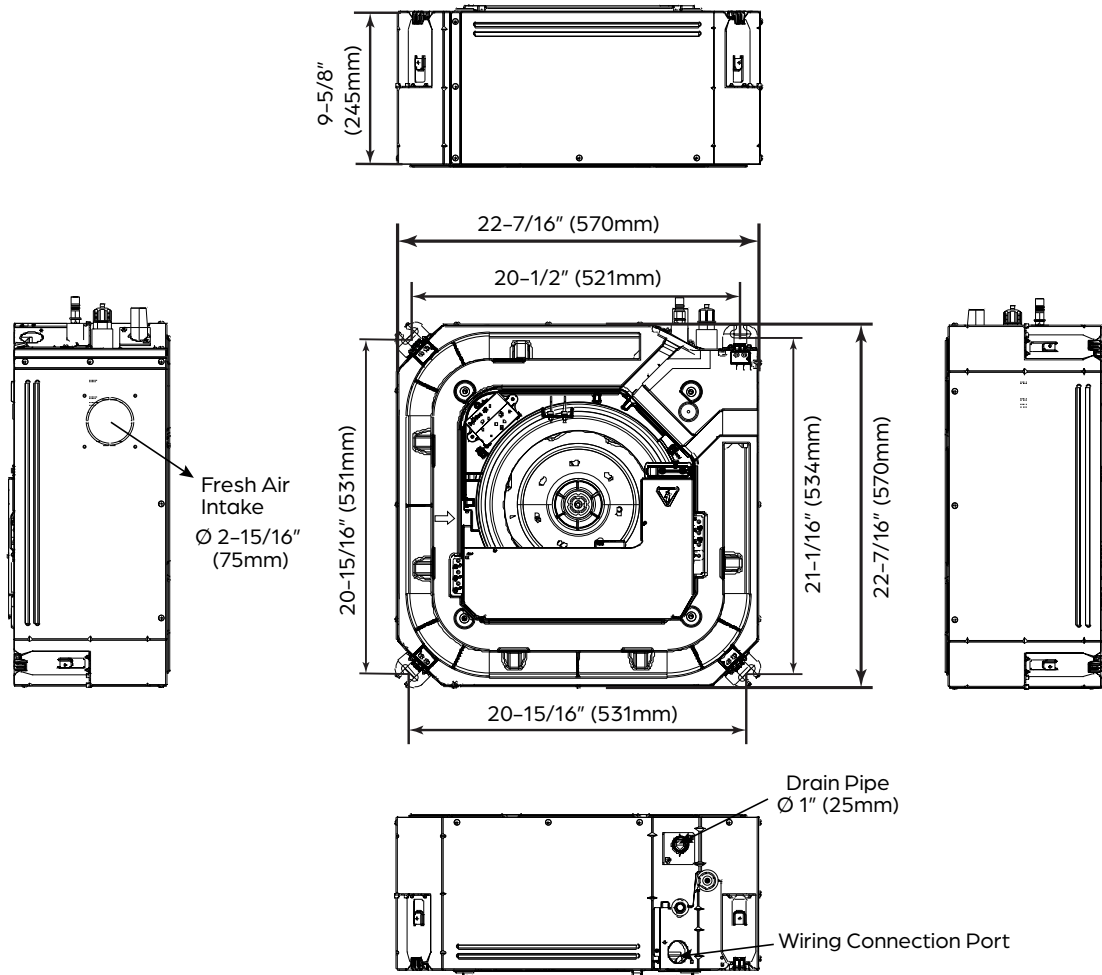

DRACPANA2A:

