



24,000 BTU/H CEILING CASSETTE

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____




ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

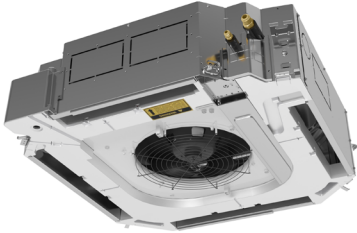SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAC24F2A	Panel: DRACPANB1B*	Wireless Remote Control
		

PRODUCT FEATURES

- High efficiency SEER2 rating, up to 22.2
- Single or Multi-zone compatible
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Compatible with DRSTAT101 wired thermostat
- *Panel sold separately

LINE SET REQUIREMENTS

Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø3/8" (Ø9.52)
Gas (in. (mm))	Ø5/8" (Ø13.02)

DIMENSIONS AND WEIGHT

Unit Dimensions (in. (mm))	Width	32-11/16 (830)
	Depth	32-11/16 (830)
	Height	8-1/16 (205)
Carton Dimensions (in. (mm))	Width	35-7/8 (910)
	Depth	35-7/8 (910)
	Height	9-7/8 (250)
Net Weight (lbs. (kg))	47.2 (21.4)	
Gross Weight (lbs. (kg))	59.1 (26.8)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	24000	
Heating Capacity (BTU/hr)	25000	
Voltage/Phase/Frequency	208-230V, 1 Ph, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Low	547 (930)
	Medium	636 (1080)
	High	706 (1200)
	Turbo	765 (1300)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø1 (Ø25)	
Drain Pump Lift (in. (mm))	29-1/2 (750)	
Sound Pressure (dB(A))	Silent	31
	Low	34
	Medium	43
	High	46



Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC


www.durastar.com

Intertek



24,000 BTU/H CEILING CASSETTE

IDU DIMENSIONS - DRAC24F2A

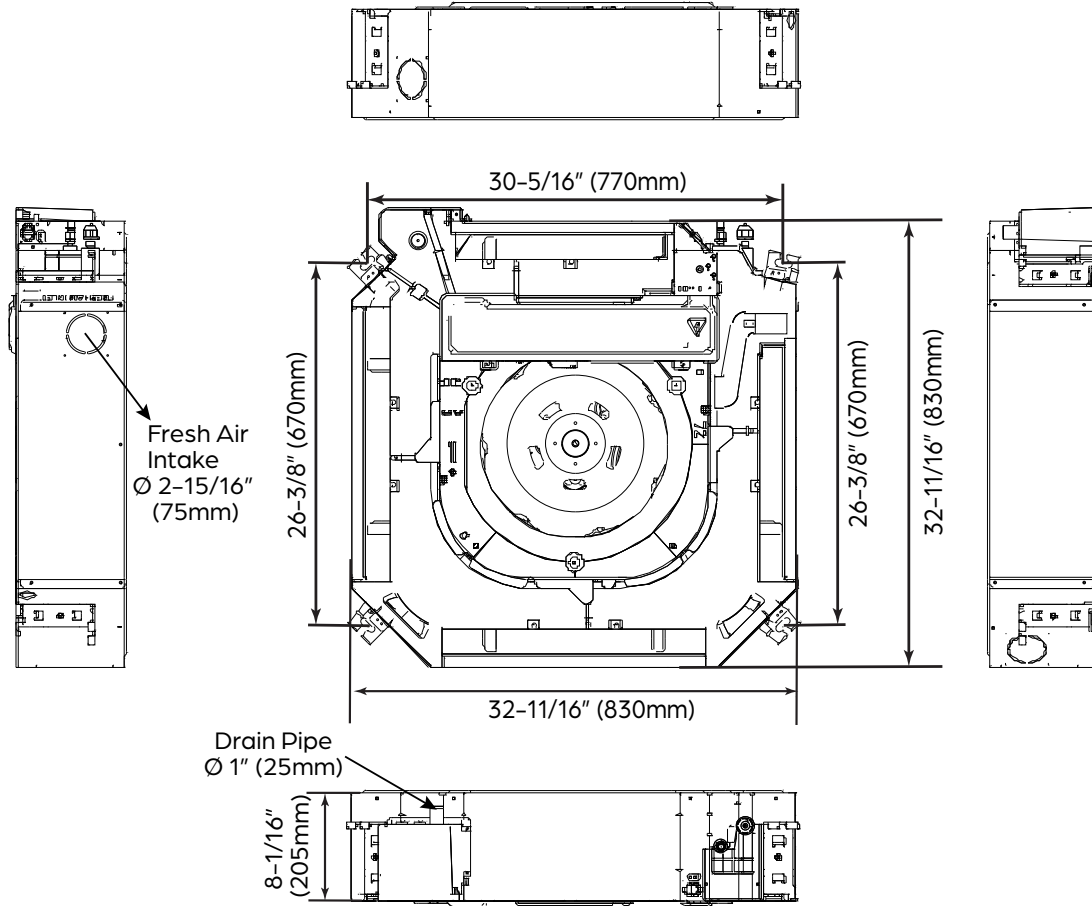

DRACPANB1B:

