



# 18,000 BTU/H FLOOR MOUNTED

SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_


ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

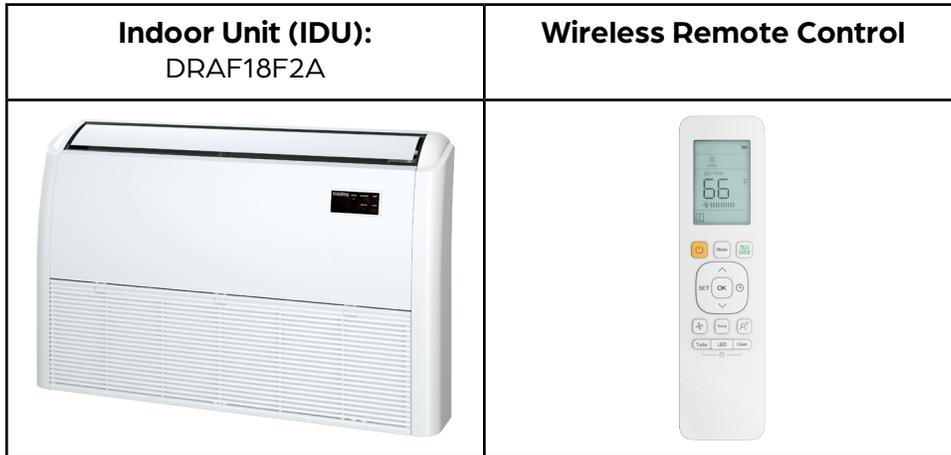

### PRODUCT FEATURES

- High efficiency SEER2 rating, up to 22.3
- Single or Multi-zone compatible
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Flexible installation for floor or ceiling
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø1/2" (Ø12.7)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	42-1/16 (1068)
	Depth	26-9/16 (675)
	Height	9-1/4 (235)
Carton Dimensions (in. (mm))	Width	45-1/8 (1145)
	Depth	29-3/4 (755)
	Height	12-9/16 (318)
Net Weight (lbs. (kg))	58.4 (26.5)	
Gross Weight (lbs. (kg))	70.6 (32.0)	

SPECIFICATIONS		
Cooling Capacity (BTU/hr)	18,000	
Heating Capacity (BTU/hr)	19,000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m <sup>3</sup> /h))	Silent	N/A
	Low	421 (715)
	Medium	486 (825)
	High	547 (930)
Field Supplied Drain Pipe O.D. (in. (mm))	Turbo	577 (980)
	Ø1 (Ø25)	
Sound Pressure (dB(A))	Silent	29
	Low	32
	Medium	40
	High	43
	Turbo	N/A






**Intertek**

Specifications are subject to change without notice.  
 © 2025 Ferguson Enterprises LLC  
 www.durastar.com



# 18,000 BTU/H FLOOR MOUNTED

IDU DIMENSIONS - DRAF18F2A

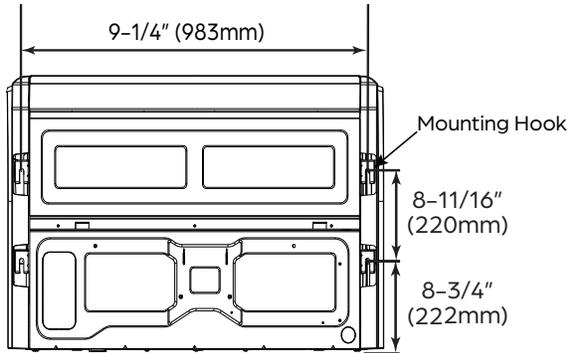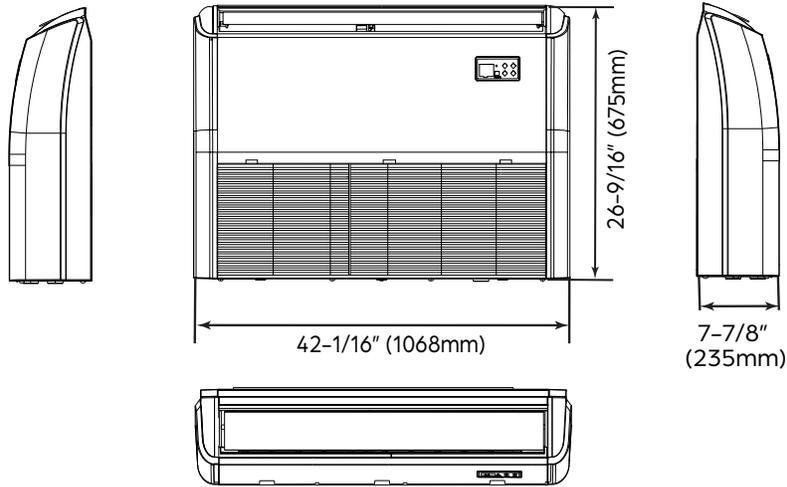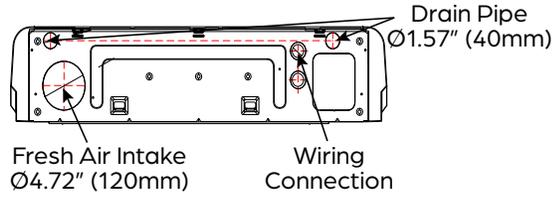

## Installation Clearances

