



9,000 BTU/H ONE-WAY CASSETTE HEAT PUMP SYSTEM

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____



ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

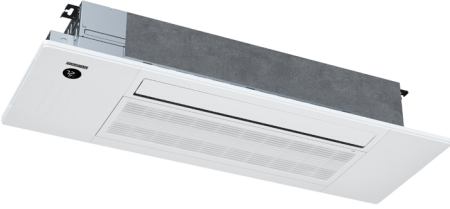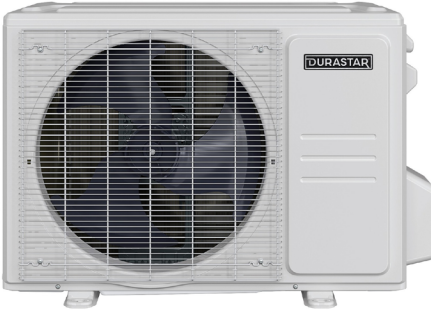Indoor Unit (IDU): DRAL0612F2A	Outdoor Unit (ODU): DRA1U09S2A	Wireless Remote Control
		

PRODUCT FEATURES

- Low ambient heating down to -13°F
- Low ambient cooling down to -13°F
- A2L refrigerant detection system
- Variable speed inverter compressor
- Quiet operation
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Humidity control
- Auto restart
- 46°F freeze protection
- Included base pan heater
- Anti-corrosive fin coating
- Compatible with DRSTAT101 wired thermostat
- Grille included

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95°F (35°C) ¹	9000
	at 109° (43°C)	10100
	at 5° (-15°C)	14400
	Cooling Range	3700~11400
Heating Capacity (BTU/hr)	Rated at 47°F (8°C) ²	11000
	Rated at 17°F (-8°C) ³	7900
	Rated at 5°F ⁴	8000
	at -13° (-25°C)	5000
	Heating Range	4100~15300

SYSTEM DATA

Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	32.5 (0.9)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

EFFICIENCY DATA

SEER2	22.1
EER2	14.4
HSPF2	11.8
COP at 47°F (8°C) ²	3.20
COP at 17°F (-8°C) ³	2.70
COP at 5°F (-15°C) ⁴	2.18



Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC

www.durastar.com

Intertek



9,000 BTU/H ONE-WAY CASSETTE HEAT PUMP SYSTEM

SPECIFICATIONS

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø3/8 (Ø9.52)
Pre-Charge Length (ft. (m))	25 (7.5)
Minimum Length (ft. (m))	10 (3.0)
Maximum Length (ft. (m))	82 (25.0)
Maximum Height Differential (ft. (m))	49 (15.0)
Additional Refrigerant (oz./ft (g/m))	0.16 (15)

OUTDOOR UNIT		
Unit Dimensions (in. (mm))	Width	30-1/8 (765)
	Depth	11-15/16 (303)
	Height	21-7/8 (555)
Carton Dimensions (in. (mm))	Width	34-15/16 (887)
	Depth	13-5/16 (337)
	Height	24 (610)
Net Weight (lbs. (kg))	62.2 (28.2)	
Gross Weight (lbs. (kg))	67.7 (30.7)	
Cooling Operating Temp. (°F (°C))	-13 - 122 (-25 - 50)	
Heating Operating Temp. (°F (°C))	-13 - 75 (-25 - 24)	
Voltage/Phase/Frequency	208-230V, 1 Ph, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	12.0	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) ¹	4.2	
Rated Current - Heating (Amps) ²	4.4	
Sound Pressure (dB(A))	55	

¹ Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

² Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)

³ Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)

⁴ Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)


INDOOR UNIT		
Unit Dimensions (in. (mm))	Width	50-5/16 (1278)
	Depth	13-3/16 (335)
	Height	9 (228)
Carton Dimensions (in. (mm))	Width	57-5/8 (1463)
	Depth	22-1/2 (571)
	Height	22-11/16 (575)
Net Weight (lbs. (kg))	45.2 (20.5)	
Gross Weight (lbs. (kg))	82.5 (37.4)	
Indoor Unit Air Flow (CFM (m³/h))	Silent	177 (300)
	Low	247 (420)
	Medium	283 (480)
	High	312 (530)
	Turbo	353 (600)
Moisture Removal (Pints/day (L/h))	50.7 (1.0)	
Field Supplied Drain Pipe O.D. (in. (mm))	Ø1 (Ø25)	
Drain Pump Lift (in. (mm))	29-1/2 (750)	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	3.0	
Sound Pressure (dB(A))	Silent	22
	Low	24
	Medium	34
	High	39
	Turbo	47

COMPRESSOR	
Type	DC Rotary Inverter
Oil Type	Ester Oil VG74
Oil Charge (oz. (ml))	10.5 (310)



9,000 BTU/H ONE-WAY CASSETTE HEAT PUMP SYSTEM

IDU DIMENSIONS – DRAL0612F2A

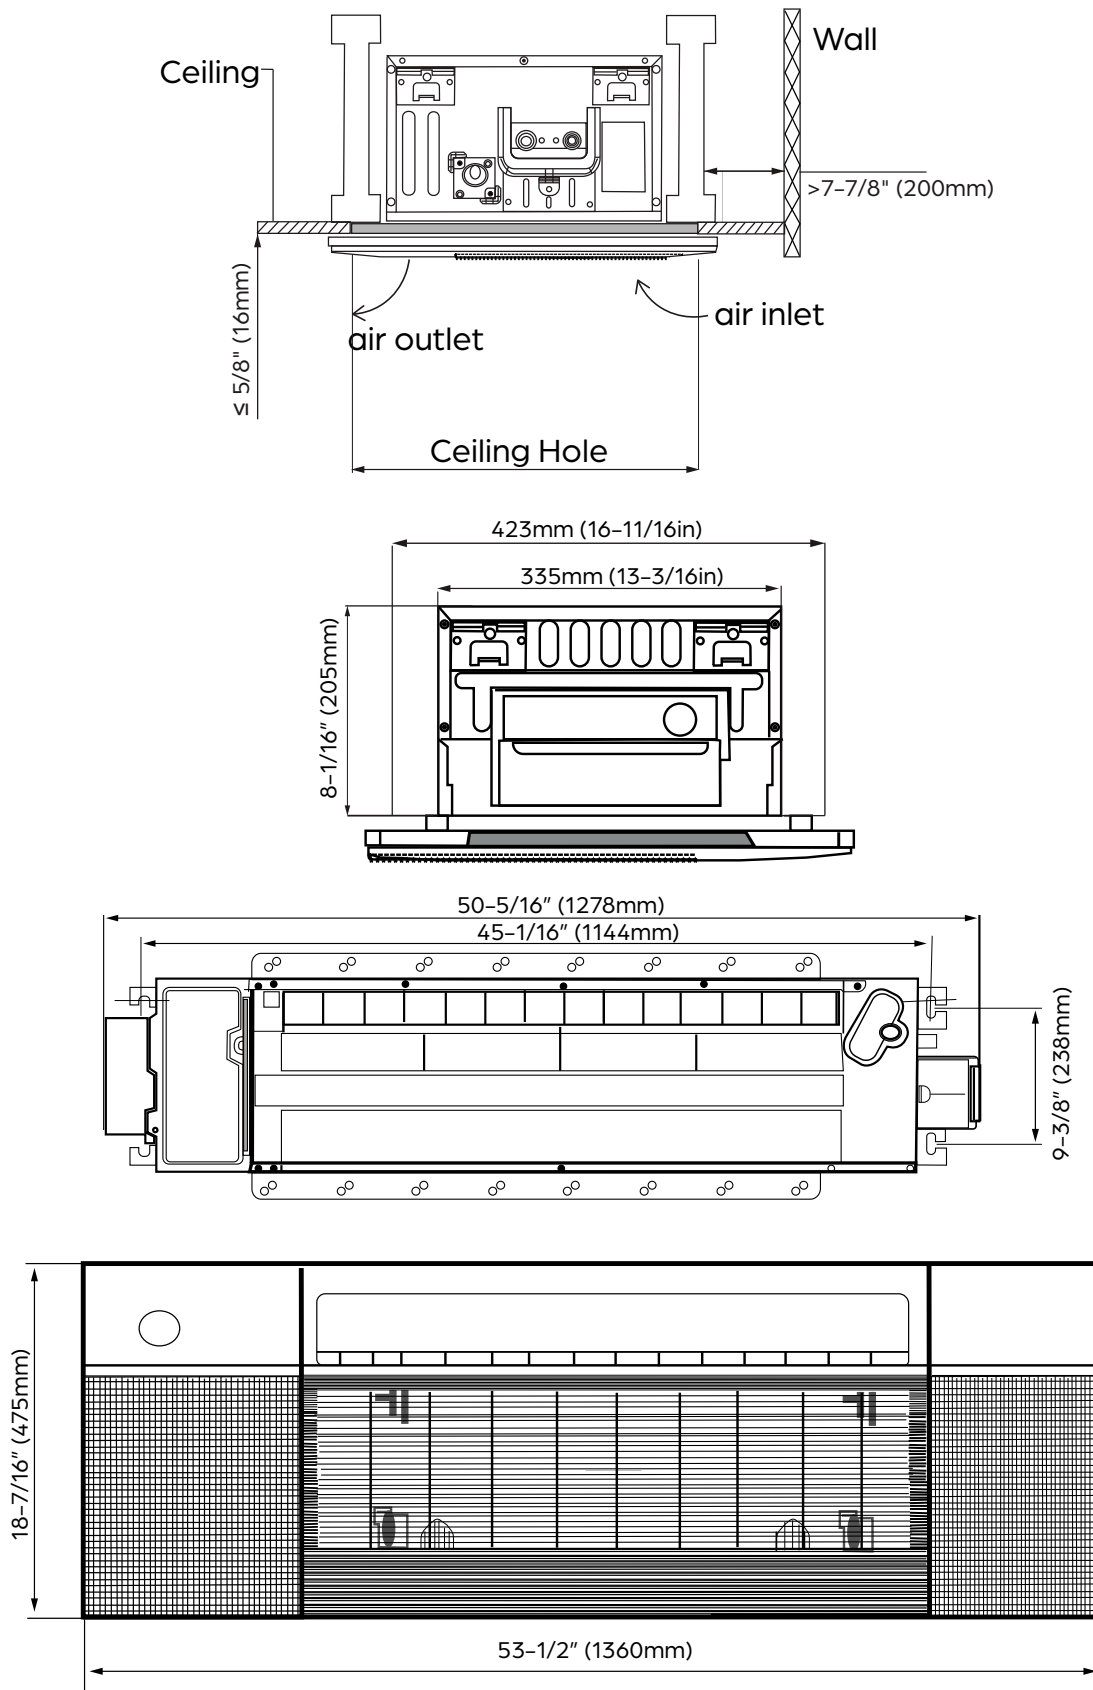

Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC


www.durastar.com




9,000 BTU/H ONE-WAY CASSETTE HEAT PUMP SYSTEM

ODU DIMENSIONS - DRA1U09S2A

Clearances

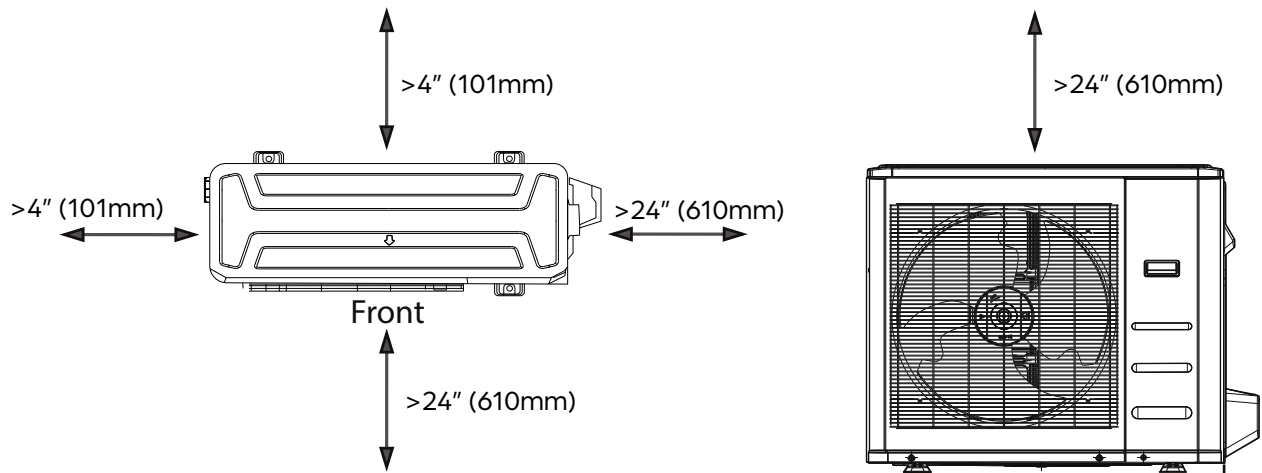

Dimensions

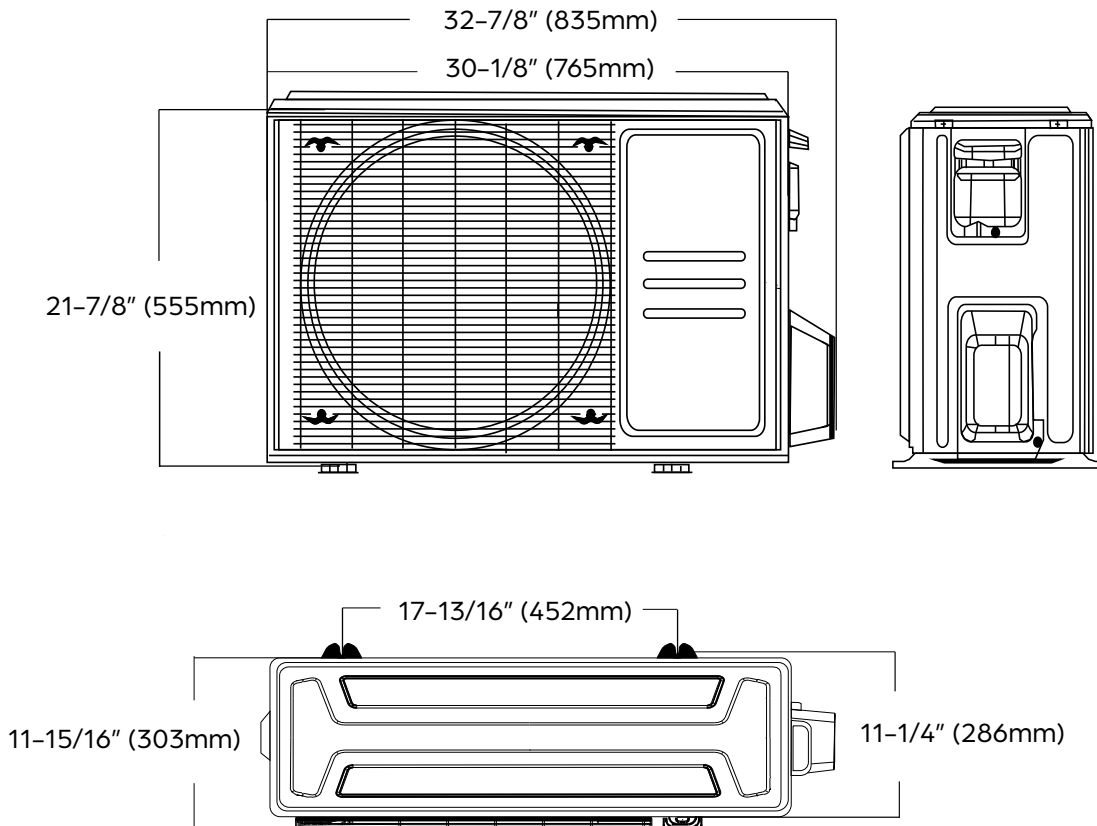

NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.