



# 6-12,000 BTU/H ONE-WAY CASSETTE

SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

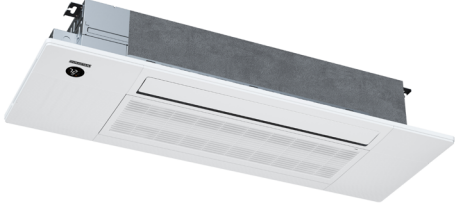

ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

Indoor Unit (IDU): DRAL0612F2A	Wireless Remote Control
	

## PRODUCT FEATURES

- High efficiency SEER2 rating, up to 24.0
- Single or Multi-zone compatible
- Adjustable BTU capacity
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Grille included
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø3/8 (Ø9.52)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	50-5/16 (1278)
	Depth	13-3/16 (335)
	Height	9 (228)
Carton Dimensions (in. (mm))	Width	57-5/8 (1463)
	Depth	22-1/2 (571)
	Height	22-11/16 (575)
Net Weight (lbs. (kg))	45.2 (20.5)	
Gross Weight (lbs. (kg))	82.9 (37.6)	

## SPECIFICATIONS

Cooling Capacity (BTU/hr)	6200 - 12000	
Heating Capacity (BTU/hr)	7400 - 12500	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	177 (300)
	Low	247 (420)
	Medium	283 (480)
	High	312 (530)
Field Supplied Drain Pipe O.D. (in. (mm))	Turbo	353 (600)
	Ø1 (Ø25)	
Drain Pump Lift (in. (mm))	29-1/2 (750)	
Sound Pressure (dB(A))	Silent	22
	Low	24
	Medium	34
	High	38
	Turbo	47



Specifications are subject to change without notice.

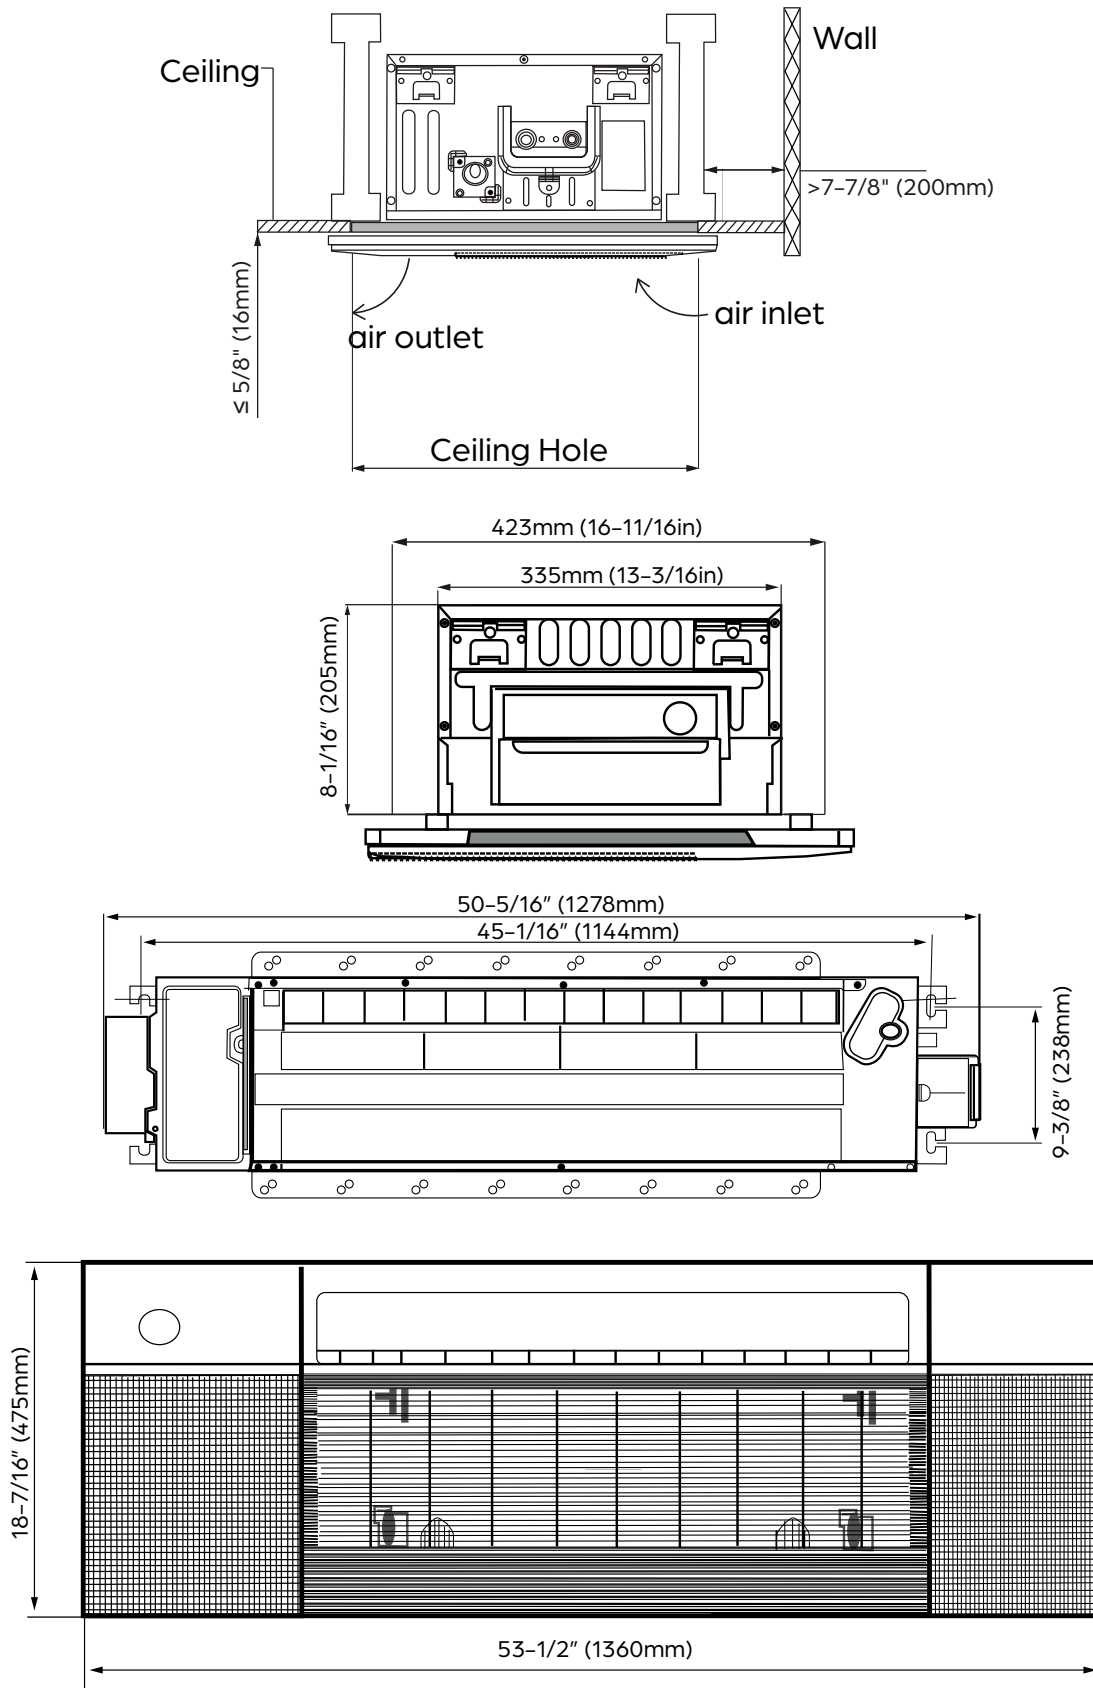
© 2025 Ferguson Enterprises LLC

www.durastar.com



## 6-12,000 BTU/H ONE-WAY CASSETTE

IDU DIMENSIONS - DRAL0612F2A



Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC

[www.durastar.com](http://www.durastar.com)