




18,000 BTU/H ONE-WAY CASSETTE

SUBMITTAL COVER SHEET

PROJECT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
REFERENCE _____
SUBMITTED BY _____ DATE _____

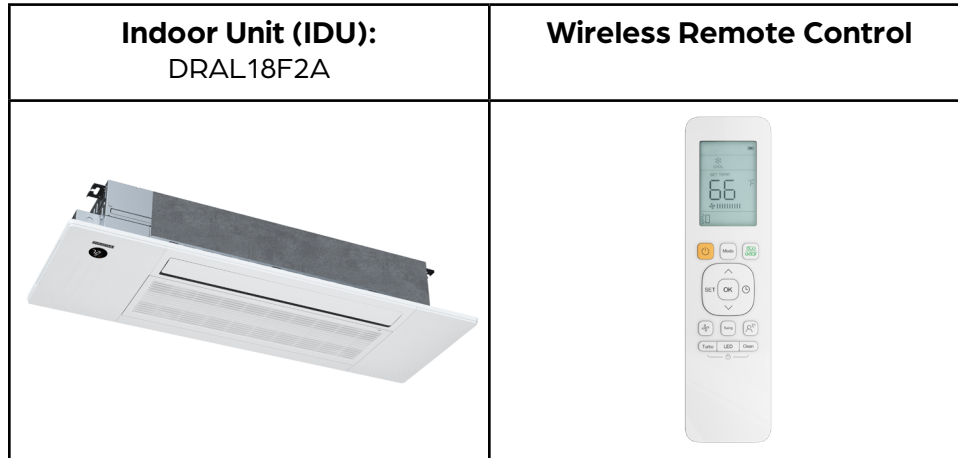

PRODUCT FEATURES

- High efficiency SEER2 rating, up to 22.2
- Single or Multi-zone compatible
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Grille included
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS

Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø1/2" (Ø12.7)

DIMENSIONS AND WEIGHT

Unit Dimensions (in. (mm))	Width	50-5/16 (1278)
	Depth	13-3/16 (335)
	Height	9 (228)
Carton Dimensions (in. (mm))	Width	57-5/8 (1463)
	Depth	22-1/2 (571)
	Height	22-11/16 (575)
Net Weight (lbs. (kg))	45.2 (20.5)	
Gross Weight (lbs. (kg))	82.9 (37.6)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	18,000	
Heating Capacity (BTU/hr)	18,000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	N/A
	Low	207 (352)
	Medium	300 (510)
	High	352 (598)
	Turbo	400 (680)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø1 (Ø25)	
Drain Pump Lift (in. (mm))	29-1/2 (750)	
Sound Pressure (dB(A))	Silent	24
	Low	30
	Medium	41
	High	44
	Turbo	N/A



Specifications are subject to change without notice.


© 2025 Ferguson Enterprises LLC

www.durastar.com



18,000 BTU/H ONE-WAY CASSETTE

IDU DIMENSIONS - DRAL18F2A

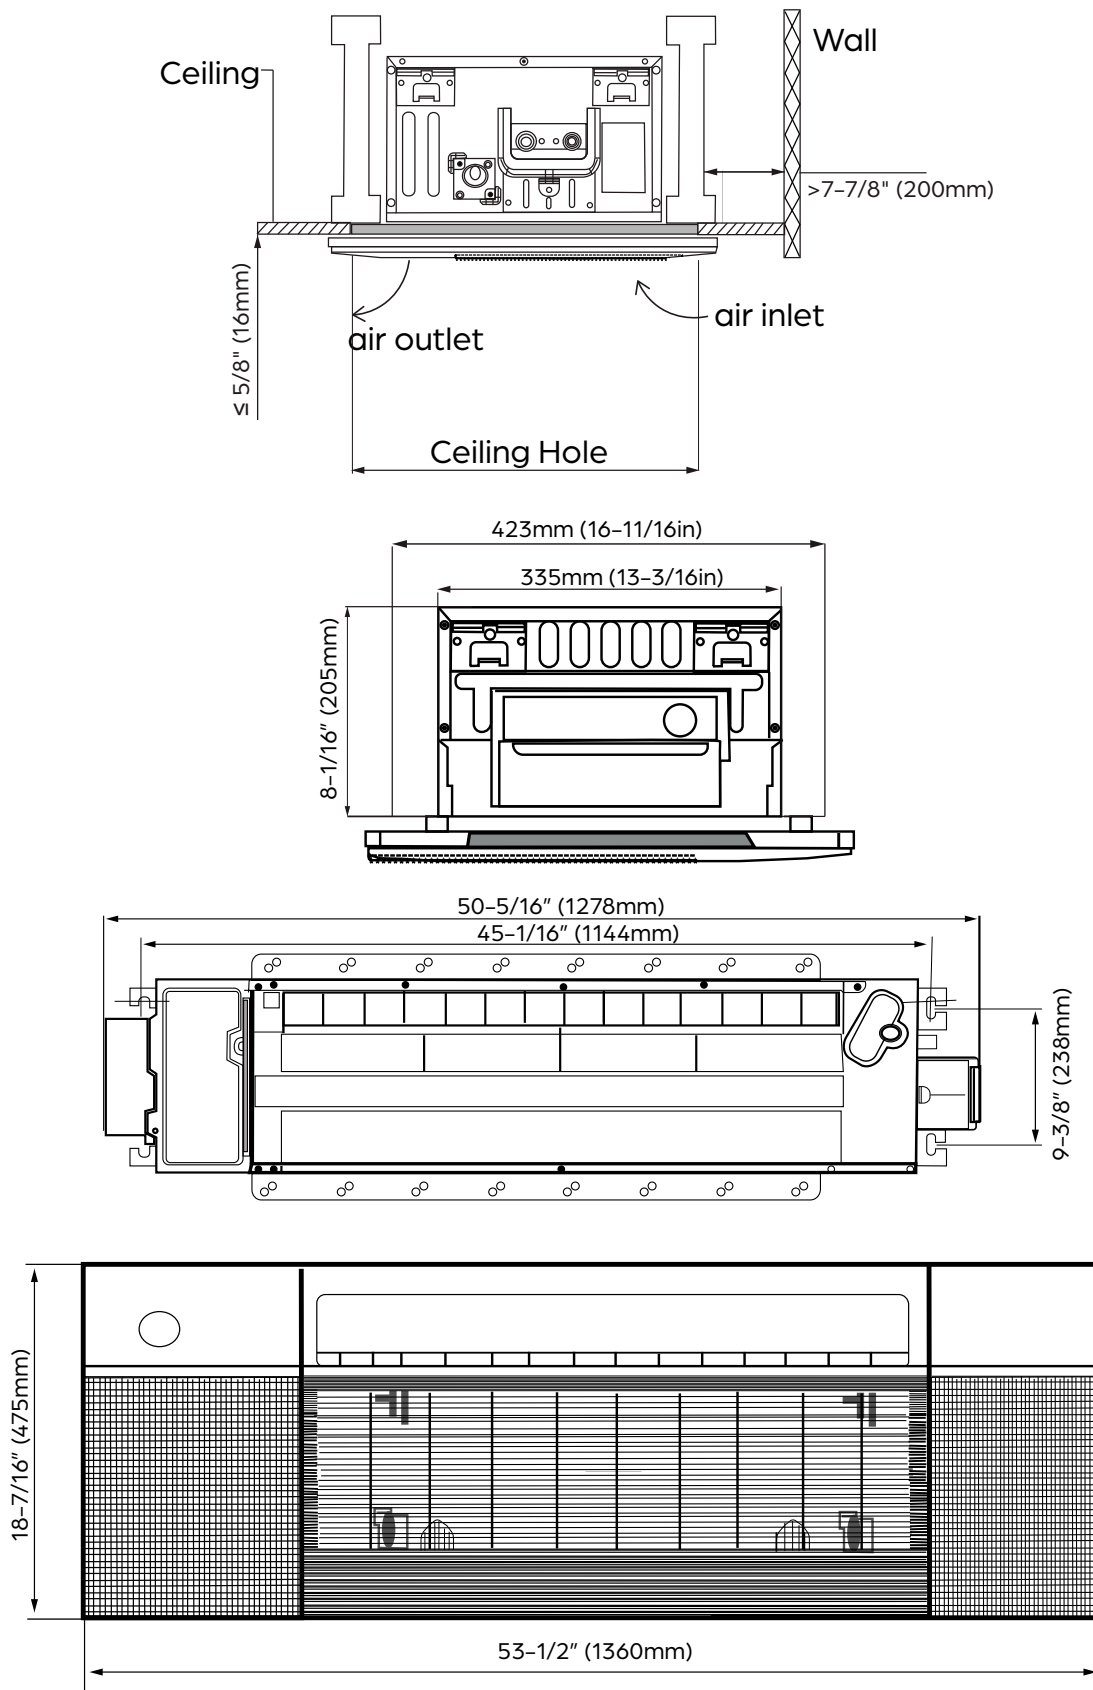

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC

www.durastar.com