



24,000 BTU/H AIR HANDLER

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____


ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

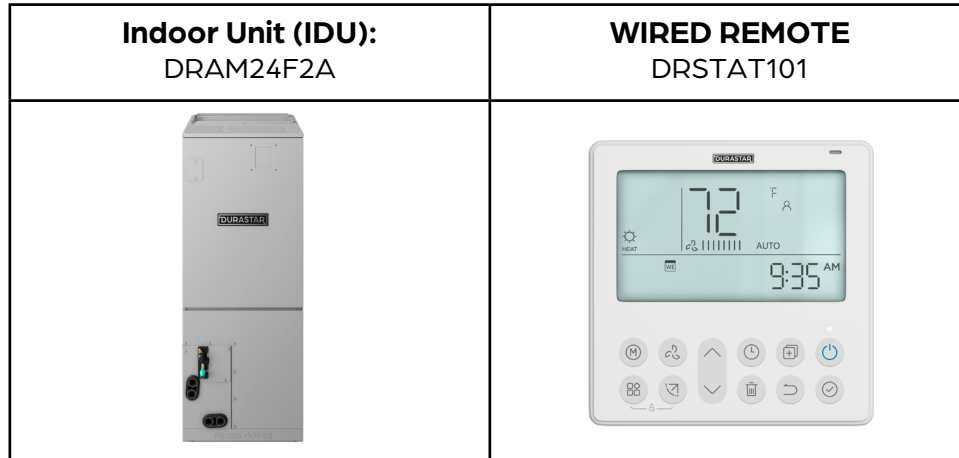

PRODUCT FEATURES

- High efficiency SEER2 rating, up to 19.7
- Multi-position installation
- All aluminum coil
- Anti-corrosive coil fin coating
- A2L refrigerant detection system
- DRSTAT101 programmable thermostat included
- Multiple operation modes (Cool, Heat, Aux, Dry, Fan, Auto)
- Built-in humidifier, IAQ and condensate switch ports
- 24V thermostat compatible

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø3/8 (Ø9.52)
Gas (in. (mm))	Ø5/8" (Ø16)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	21 (534)
	Depth	17-1/2 (445)
	Height	45 (1143)
Carton Dimensions (in. (mm))	Width	26-9/16 (675)
	Depth	20-7/8 (530)
	Height	48-5/8 (1235)
Net Weight (lbs. (kg))	122.1 (55.4)	
Gross Weight (lbs. (kg))	132.3 (60.0)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	24000	
Heating Capacity (BTU/hr)	25000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	N/A
	Low	630 (1070)
	Medium	695 (1180)
	High	759 (1290)
	Turbo	824 (1400)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø3/4 (Ø19)	
Sound Pressure (dB(A))	Silent	N/A
	Low	29
	Medium	42
	High	44
	Turbo	N/A



Intertek

Specifications are subject to change without notice.


© 2025 Ferguson Enterprises LLC

www.durastar.com




24,000 BTU/H AIR HANDLER
IDU DIMENSIONS – DRAM24F2A

Dimensions

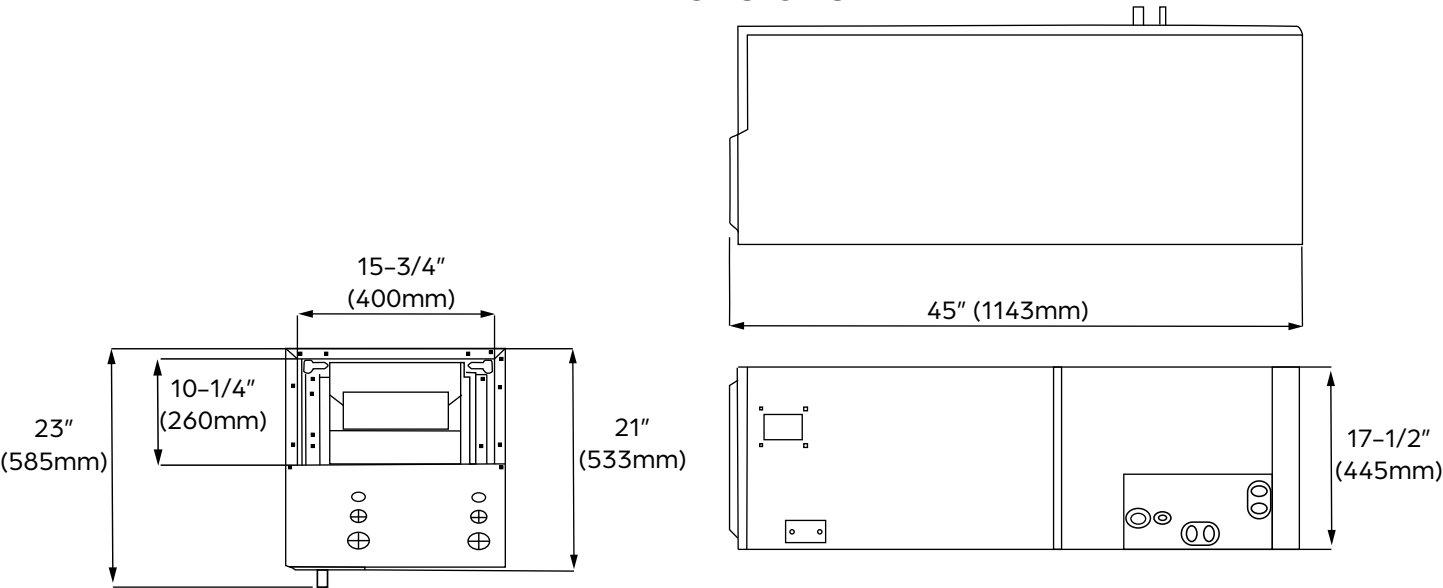

Clearances

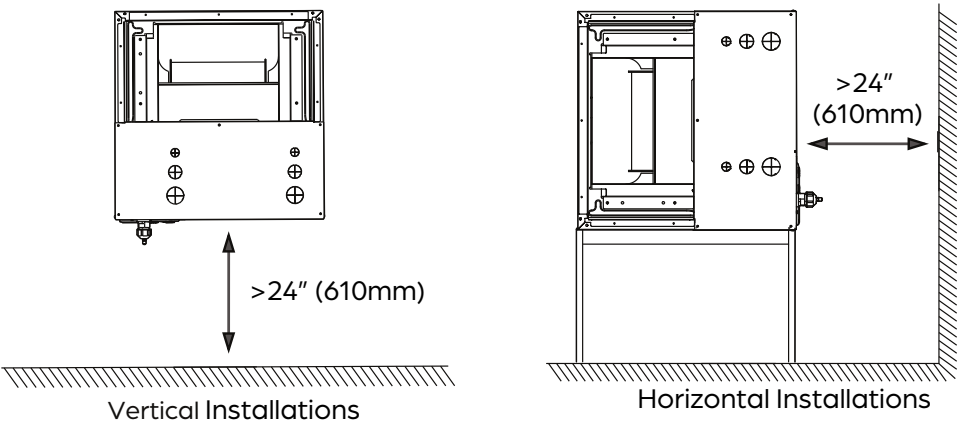

Auxiliary Electric Heaters (Optional)

Heater Model Number (kW)	Circuit 1 208/230V		
	Heater Amps (1)	MCA (1)	MOCP (1)
DRHTR05BRKB (5kW)	18.0/ 20.0	23.0/ 27.0	25.0/ 30.0
DRHTR08BRKB (8kW)	28.8/ 32.0	37.0/ 42.0	40.0/ 45.0
DRHTR10BRKB (10kW)	36.0/ 40.0	46.0/ 53.0	50.0/ 60.0