

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_




ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

Indoor Unit (IDU): DRAS09F2A	Outdoor Unit (ODU): DRA1H09S2A	Wired Thermostat
		

## PRODUCT FEATURES

- Up to 100% heating capacity at 0°F
- Low ambient heating and cooling down to -22°F
- A2L refrigerant detection system
- Variable speed inverter compressor
- Quiet operation
- Wireless remote control with "Follow Me" technology
- Larger top and bottom air outlets
- Turbo, ECO, Active Clean, Sleep modes and more
- Humidity control
- Auto restart
- 46°F freeze protection
- Included base pan heater
- Anti-corrosive fin coating
- Compatible with DRSTAT101 wired thermostat

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95°F (35°C) <sup>1</sup>	9000
	at 109°F (43°C)	11300
	at 5°F (-15°C)	11800
	Cooling Range	3700 - 13700
Heating Capacity (BTU/hr)	Rated at 47°F (8°C) <sup>2</sup>	9000
	Rated at 17°F (-8°C) <sup>3</sup>	9800
	Rated at 5°F (-15°C) <sup>4</sup>	11300
	at -13°F (-25°C)	5900
	at -22°F (-30°C)	4700
	Heating Range	4400 - 16100

## SYSTEM DATA

Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	35.3 (1.0)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

## EFFICIENCY DATA

SEER2	27.2
EER2	15.1
HSPF2	10.9
COP at 47°F (8°C) <sup>2</sup>	4.43
COP at 17°F (-8°C) <sup>3</sup>	2.71
COP at 5°F (-15°C) <sup>4</sup>	1.84



Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC

www.durastar.com



# 9,000 BTU/H SIRIUS HEAT™ FLOOR MOUNTED HEAT PUMP SYSTEM

SPECIFICATIONS

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø3/8 (Ø9.52)
Pre-Charge Length (ft. (m))	25 (7.5)
Minimum Length (ft. (m))	10 (3.0)
Maximum Length (ft. (m))	82 (25.0)
Maximum Height Differential (ft. (m))	49 (15.0)
Additional Refrigerant (oz./ft (g/m))	0.16 (15)

OUTDOOR UNIT		
Unit Dimensions	Width	31-11/16 (805)
	Depth	13 (330)
	Height	21-13/16 (554)
Carton Dimensions	Width	36 (915)
	Depth	14-5/8 (370)
	Height	24-1/4 (615)
Net Weight (lbs. (kg))	72.8 (33.0)	
Gross Weight (lbs. (kg))	78.7 (35.7)	
Cooling Operating Temp. (°F (°C))	-22 - 122 (-30 - 50)	
Heating Operating Temp. (°F (°C))	-22 - 75 (-30 - 24)	
Voltage/Phase/Frequency	208-230V, 1 Ph, 60 Hz	
Voltage Range (V)	187-253	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	15.0	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) <sup>1</sup>	4.2	
Rated Current - Heating (Amps) <sup>2</sup>	4.1	
Sound Pressure (dB(A))	56	

<sup>1</sup> Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

<sup>2</sup> Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)


<sup>3</sup> Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)

<sup>4</sup> Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)


INDOOR UNIT		
Unit Dimensions (in. (mm))	Width	31-1/4 (794)
	Depth	7-7/8 (200)
	Height	24-7/16 (621)
Carton Dimensions (in. (mm))	Width	34 (865)
	Depth	11 (280)
	Height	28-5/16 (719)
Net Weight (lbs. (kg))	32.9 (14.9)	
Gross Weight (lbs. (kg))	41.9 (19.0)	
Indoor Unit Air Flow (CFM (m³/h))	Silent	130 (220)
	Low	188 (320)
	Medium	324 (550)
	High	377 (640)
	Turbo	441 (750)
Moisture Removal (Pints/day (L/h))	40.5 (0.8)	
Drain Port O.D. (in. (mm))	Ø5/8 (Ø16)	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	3.0	
Sound Pressure (dB(A))	Silent	22
	Low	26
	Medium	38
	High	41
	Turbo	45

COMPRESSOR	
Type	DC Rotary Inverter
Oil Type	Ester Oil VG74
Oil Charge (oz. (ml))	11.8 (350)


### Dimensions

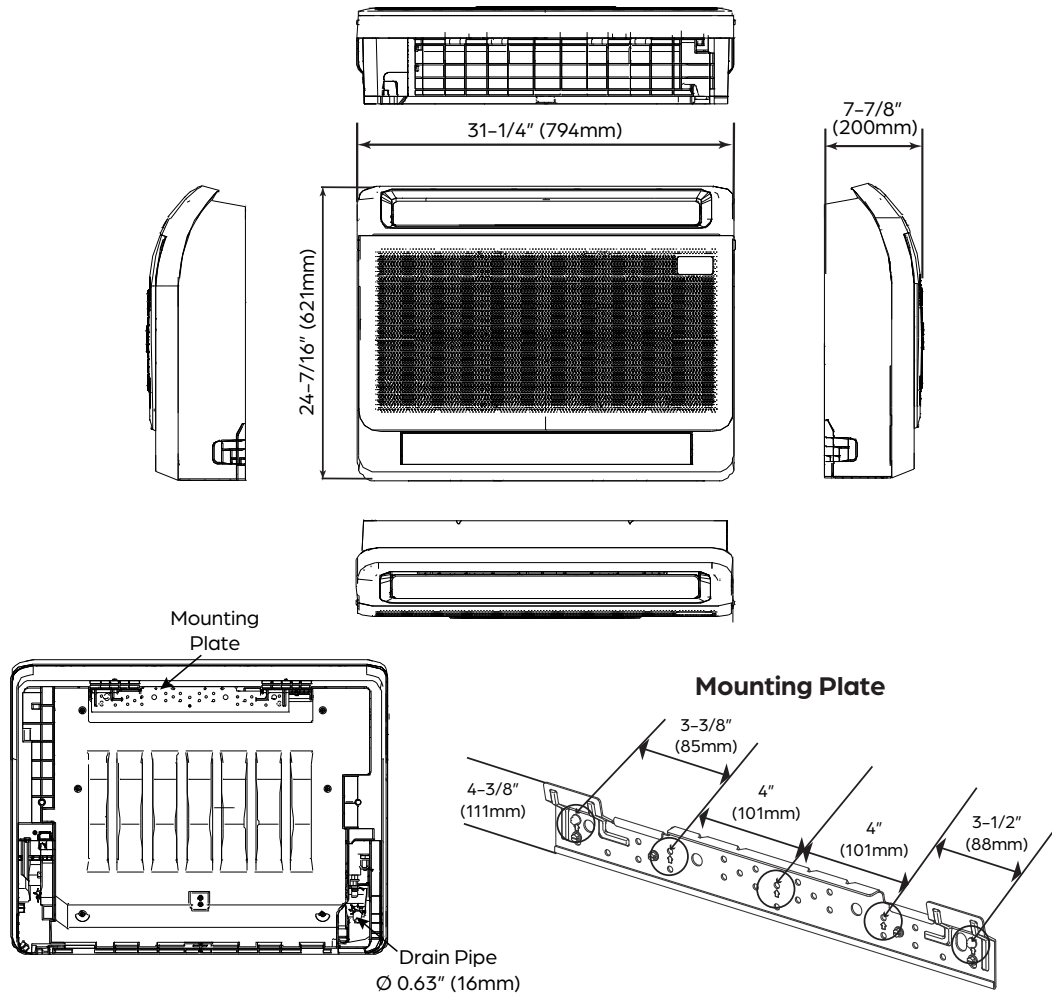


### Clearances

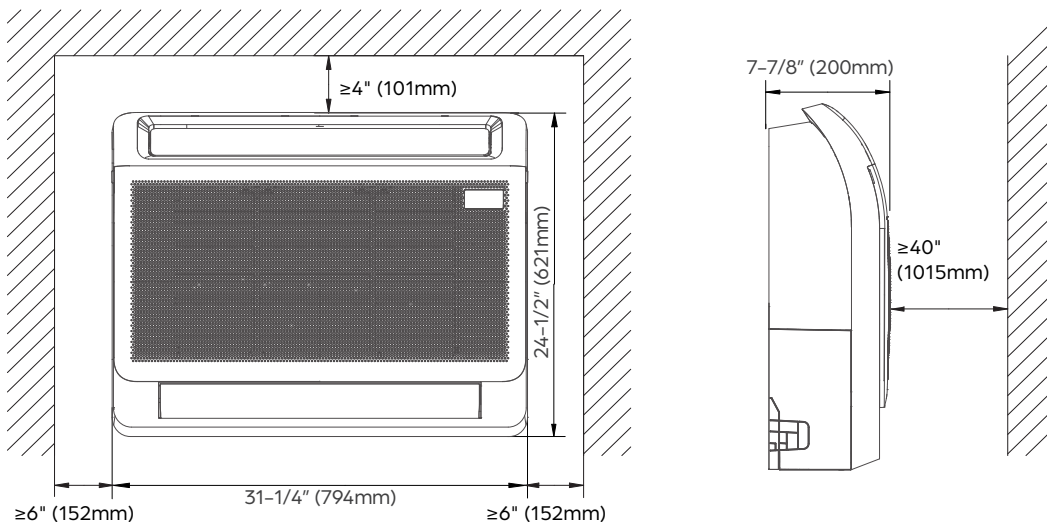

### Clearances

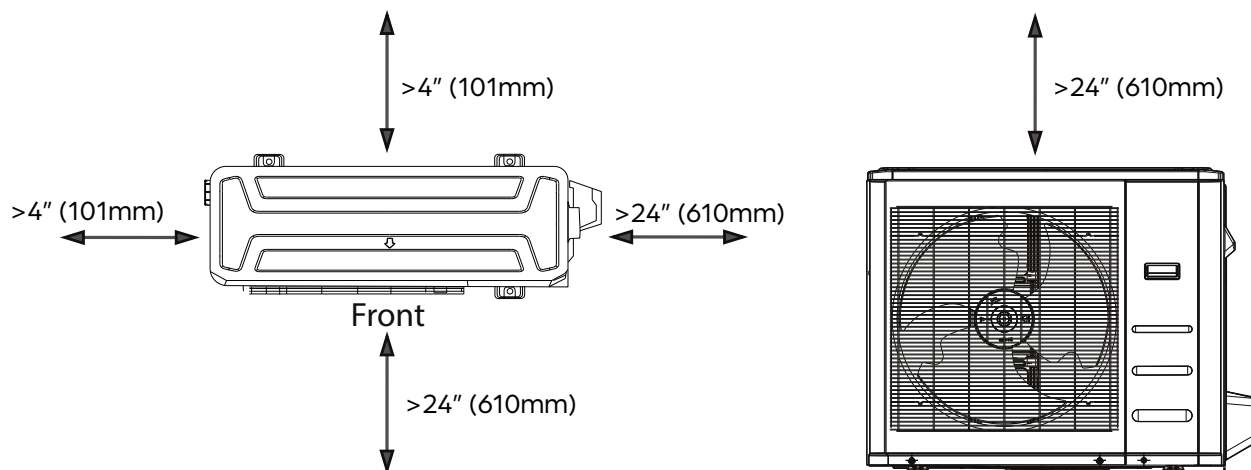

### Dimensions

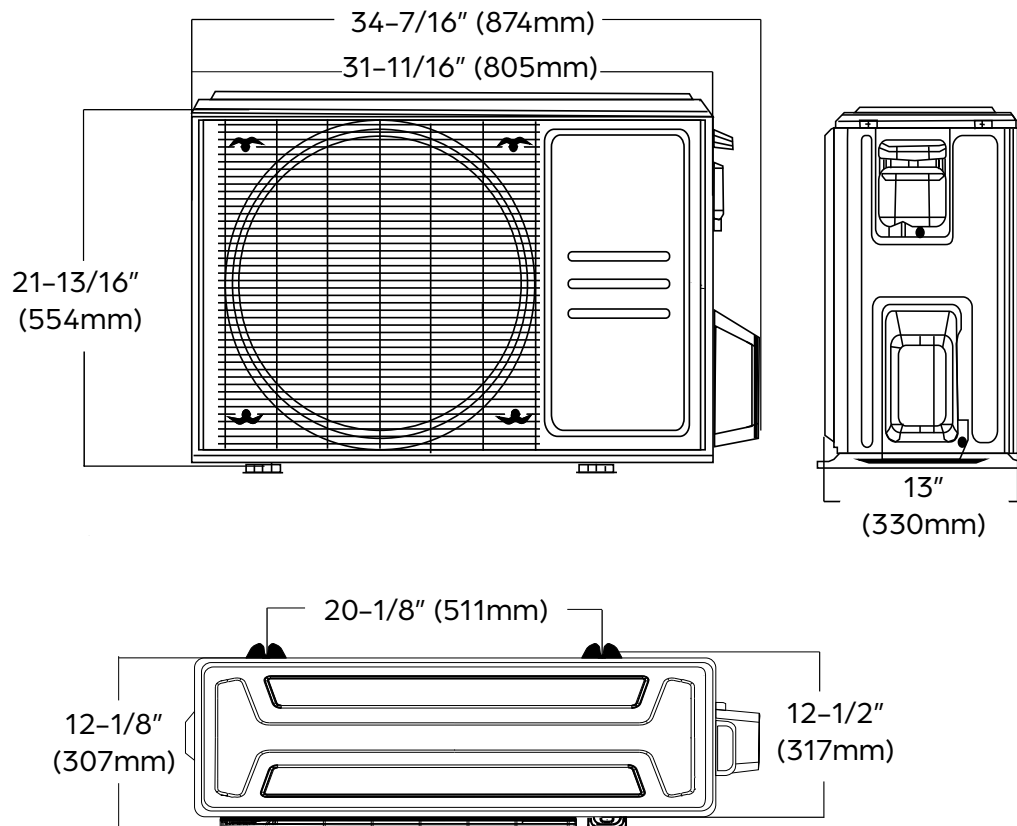

#### NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.