



9,000 BTU/H FLOOR MOUNTED

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAS09F2A	Wireless Remote Control
	

PRODUCT FEATURES

- High efficiency SEER2 rating, up to 27.2
- Single or Multi-zone compatible
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Larger top and bottom air outlets
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS

Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø3/8 (Ø9.52)

DIMENSIONS AND WEIGHT

Unit Dimensions (in. (mm))	Width	31-1/4 (794)
	Depth	7-7/8 (200)
	Height	24-7/16 (621)
Carton Dimensions (in. (mm))	Width	34 (865)
	Depth	11 (280)
	Height	28-5/16 (719)
Net Weight (lbs. (kg))	32.9 (14.9)	
Gross Weight (lbs. (kg))	41.9 (19.0)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	9,000	
Heating Capacity (BTU/hr)	9,000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m ³ /h))	Silent	130 (220)
	Low	188 (320)
	Medium	324 (550)
	High	377 (640)
	Turbo	441 (750)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø5/8 (Ø16)	
Sound Pressure (dB(A))	Silent	20
	Low	30
	Medium	35
	High	39
	Turbo	42



Intertek

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC


www.durastar.com



9,000 BTU/H FLOOR MOUNTED

IDU DIMENSIONS – DRAS09F2A

Dimensions

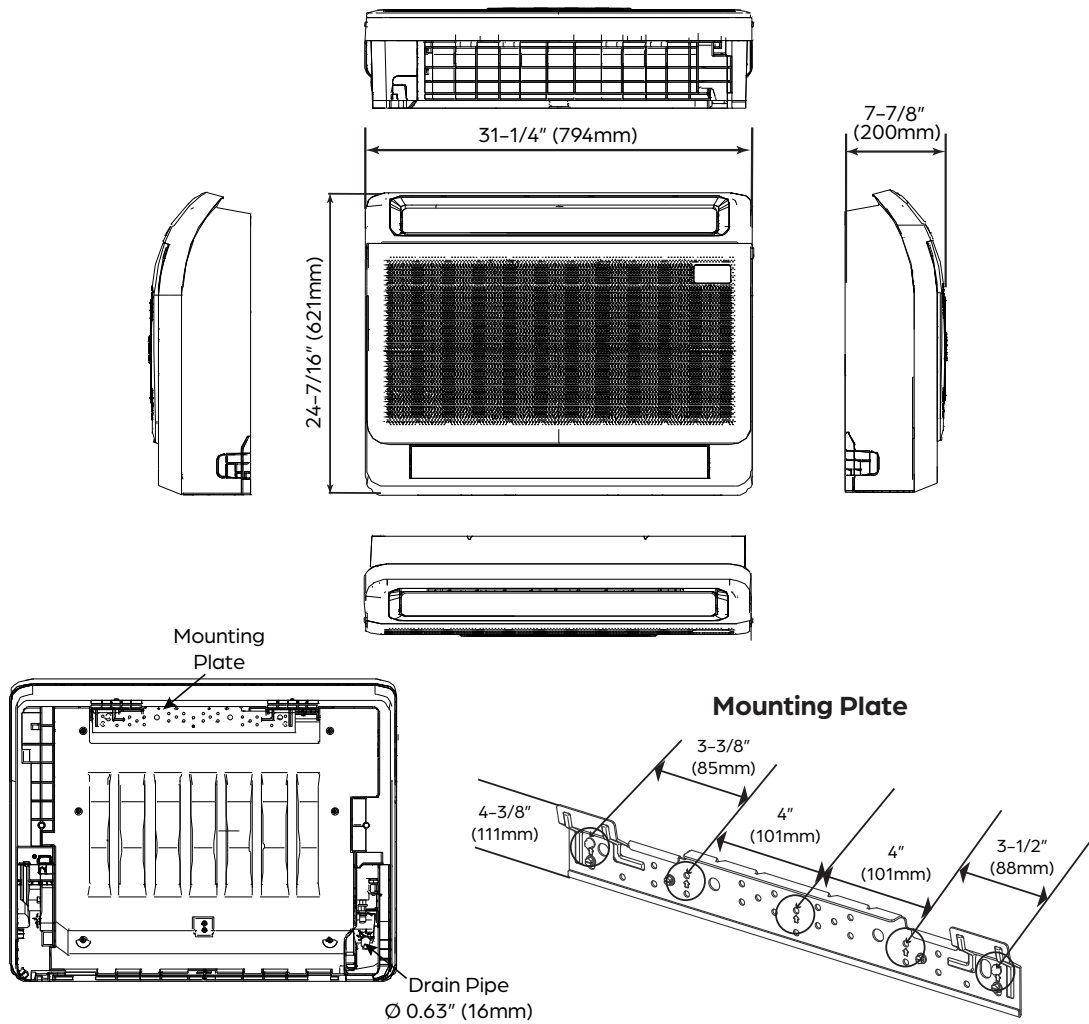

Clearances

