

PROJECT NAME _____

LOCATION _____


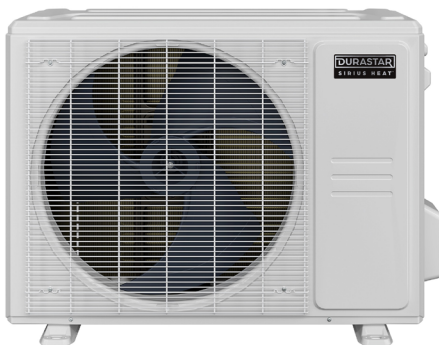

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAS16F2A	Outdoor Unit (ODU): DRA1H18S2A	Wired Thermostat
		

PRODUCT FEATURES

- Up to 100% heating capacity at 0°F
- Low ambient heating and cooling down to -22°F
- A2L refrigerant detection system
- Variable speed inverter compressor
- Quiet operation
- Wireless remote control with "Follow Me" technology
- Larger top and bottom air outlets
- Turbo, ECO, Active Clean, Sleep modes and more
- Humidity control
- Auto restart
- 46°F freeze protection
- Included base pan heater
- Anti-corrosive fin coating
- Compatible with DRSTAT101 wired thermostat

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95°F (35°C) ¹	16000
	at 109°F (43°C)	13000
	at 5°F (-15°C)	16000
	Cooling Range	6500 - 17200
Heating Capacity (BTU/hr)	Rated at 47°F (8°C) ²	17000
	Rated at 17°F (-8°C) ³	14200
	Rated at 5°F (-15°C) ⁴	17500
	at -13°F (-25°C)	9600
	at -22°F (-30°C)	7600
	Heating Range	6500 - 20000

SYSTEM DATA

Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	55.4 (1.6)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

EFFICIENCY DATA

SEER2	20.0
EER2	12.5
HSPF2	10.3
COP at 47°F (8°C) ²	2.85
COP at 17°F (-8°C) ³	2.60
COP at 5°F (-15°C) ⁴	1.95

Specifications are subject to change without notice.

© 2024 Ferguson Enterprises LLC

www.durastar.com



Intertek



16,000 BTU/H SIRIUS HEAT™ FLOOR MOUNTED HEAT PUMP SYSTEM

SPECIFICATIONS

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø1/2 (Ø12.70)
Pre-Charge Length (ft. (m))	25 (7.5)
Minimum Length (ft. (m))	10 (3.0)
Maximum Length (ft. (m))	99 (30.0)
Maximum Height Differential (ft. (m))	66 (20.0)
Additional Refrigerant (oz./ft (g/m))	0.16 (15)

OUTDOOR UNIT		
Unit Dimensions	Width	35-1/16 (890)
	Depth	13-7/16 (342)
	Height	26-1/2 (673)
Carton Dimensions	Width	39-3/16 (995)
	Depth	15-11/16 (398)
	Height	24-1/4 (740)
Net Weight (lbs. (kg))	99.9 (45.3)	
Gross Weight (lbs. (kg))	107.8 (48.9)	
Cooling Operating Temp. (°F (°C))	-22 - 122 (-30 - 50)	
Heating Operating Temp. (°F (°C))	-22 - 75 (-30 - 24)	
Voltage/Phase/Frequency	208-230V, 1 Ph, 60 Hz	
Voltage Range (V)	187-253	
Recommended Breaker (Amps)	20	
Minimum Circuit Ampacity (Amps)	19.0	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) ¹	8.0	
Rated Current - Heating (Amps) ²	8.0	
Sound Pressure (dB(A))	59	

¹ Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

² Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)


³ Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)

⁴ Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)


INDOOR UNIT		
Unit Dimensions (in. (mm))	Width	31-1/4 (794)
	Depth	7-7/8 (200)
	Height	24-7/16 (621)
Carton Dimensions (in. (mm))	Width	34 (865)
	Depth	11 (280)
	Height	28-5/16 (719)
Net Weight (lbs. (kg))	32.9 (14.9)	
Gross Weight (lbs. (kg))	41.9 (19.0)	
Indoor Unit Air Flow (CFM (m³/h))	Silent	206 (350)
	Low	324 (550)
	Medium	383 (650)
	High	441 (750)
	Turbo	500 (850)
Moisture Removal (Pints/day (L/h))	110.6 (2.2)	
Drain Port O.D. (in. (mm))	Ø5/8 (Ø16)	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	3.0	
Sound Pressure (dB(A))	Silent	26
	Low	31
	Medium	41
	High	44
	Turbo	47

COMPRESSOR	
Type	DC Rotary Inverter
Oil Type	Ester Oil VG74
Oil Charge (oz. (ml))	21 (620)


Dimensions

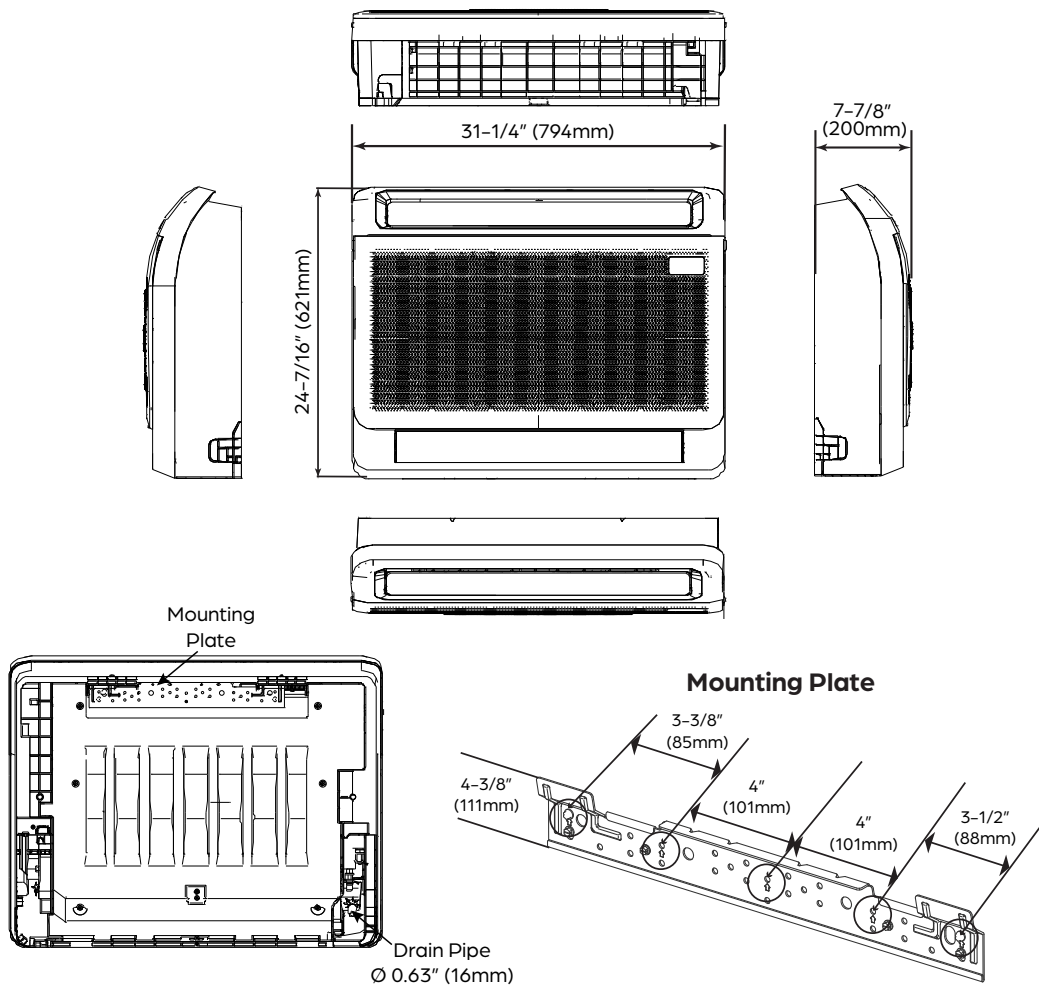


Clearances

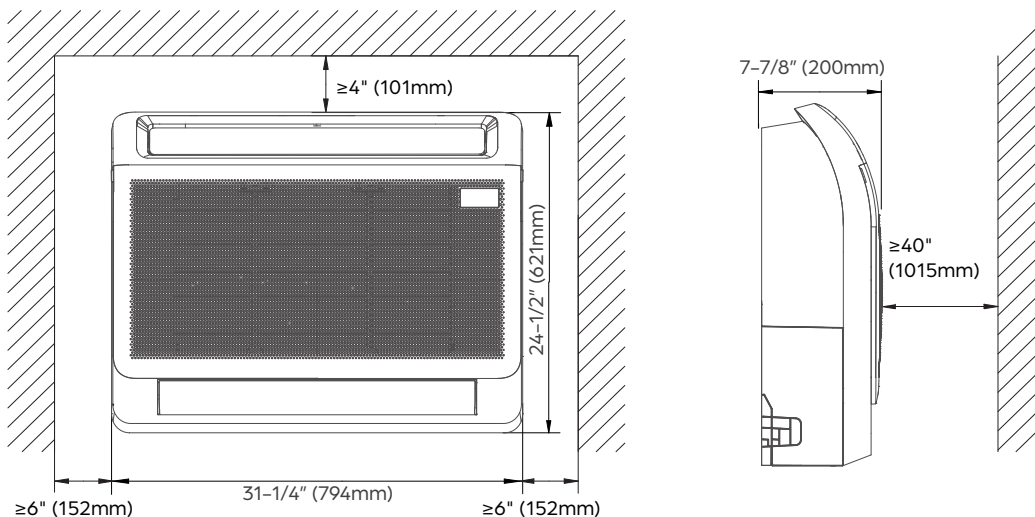

Clearances

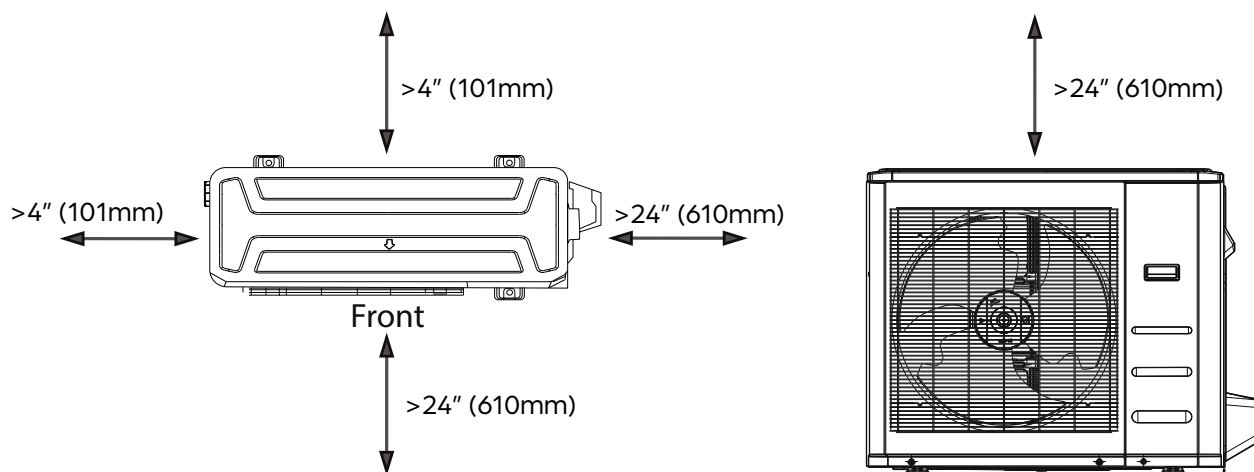

Dimensions

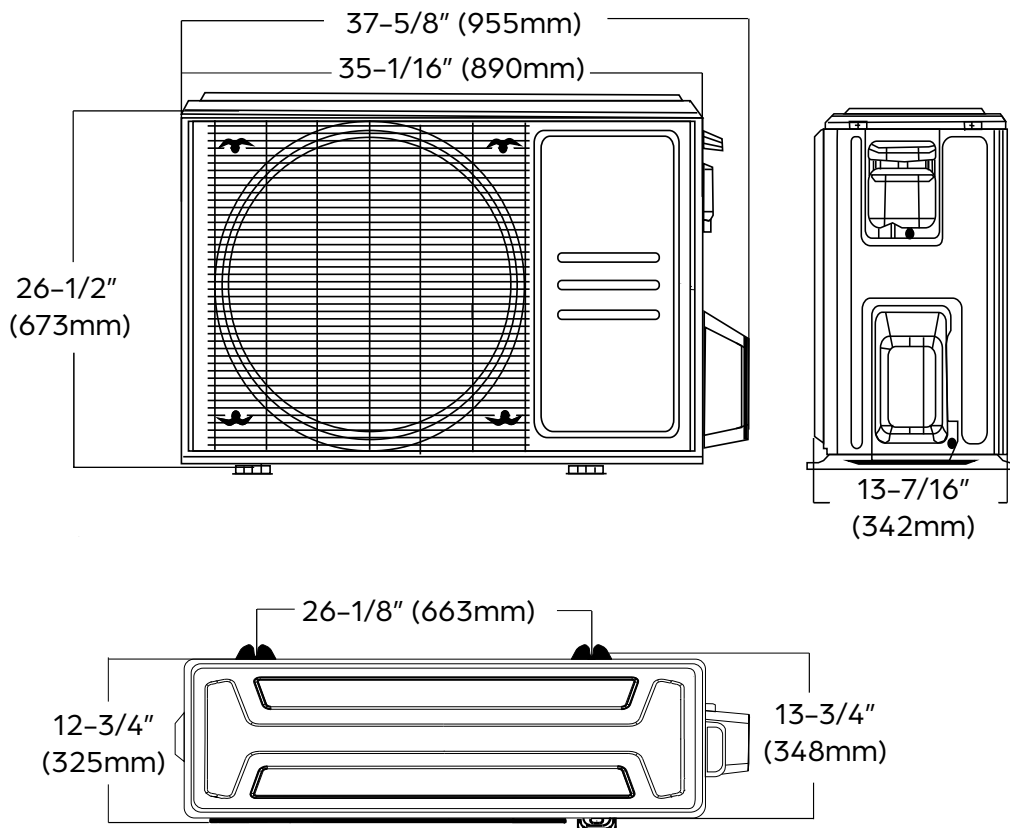

NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.