



# 16,000 BTU/H FLOOR MOUNTED

SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_



ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

Indoor Unit (IDU): DRAS16F2A	Wireless Remote Control
	

## PRODUCT FEATURES

- High efficiency SEER2 rating, up to 23.8
- Single or Multi-zone compatible
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Auto, Turbo, Swing, Sleep modes and more
- Humidity control
- Larger top and bottom air outlets
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø1/2" (Ø12.7)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	31-1/4 (794)
	Depth	7-7/8 (200)
	Height	24-7/16 (621)
Carton Dimensions (in. (mm))	Width	34 (865)
	Depth	11 (280)
	Height	28-5/16 (719)
Net Weight (lbs. (kg))	32.9 (14.9)	
Gross Weight (lbs. (kg))	41.9 (19.0)	

## SPECIFICATIONS

Cooling Capacity (BTU/hr)	16,000	
Heating Capacity (BTU/hr)	17,000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	206 (350)
	Low	324 (550)
	Medium	383 (650)
	High	441 (750)
	Turbo	500 (850)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø5/8 (Ø16)	
Sound Pressure (dB(A))	Silent	24
	Low	29
	Medium	39
	High	42
	Turbo	N/A



Intertek

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC


www.durastar.com




## 16,000 BTU/H FLOOR MOUNTED

IDU DIMENSIONS - DRAS16F2A

### Dimensions

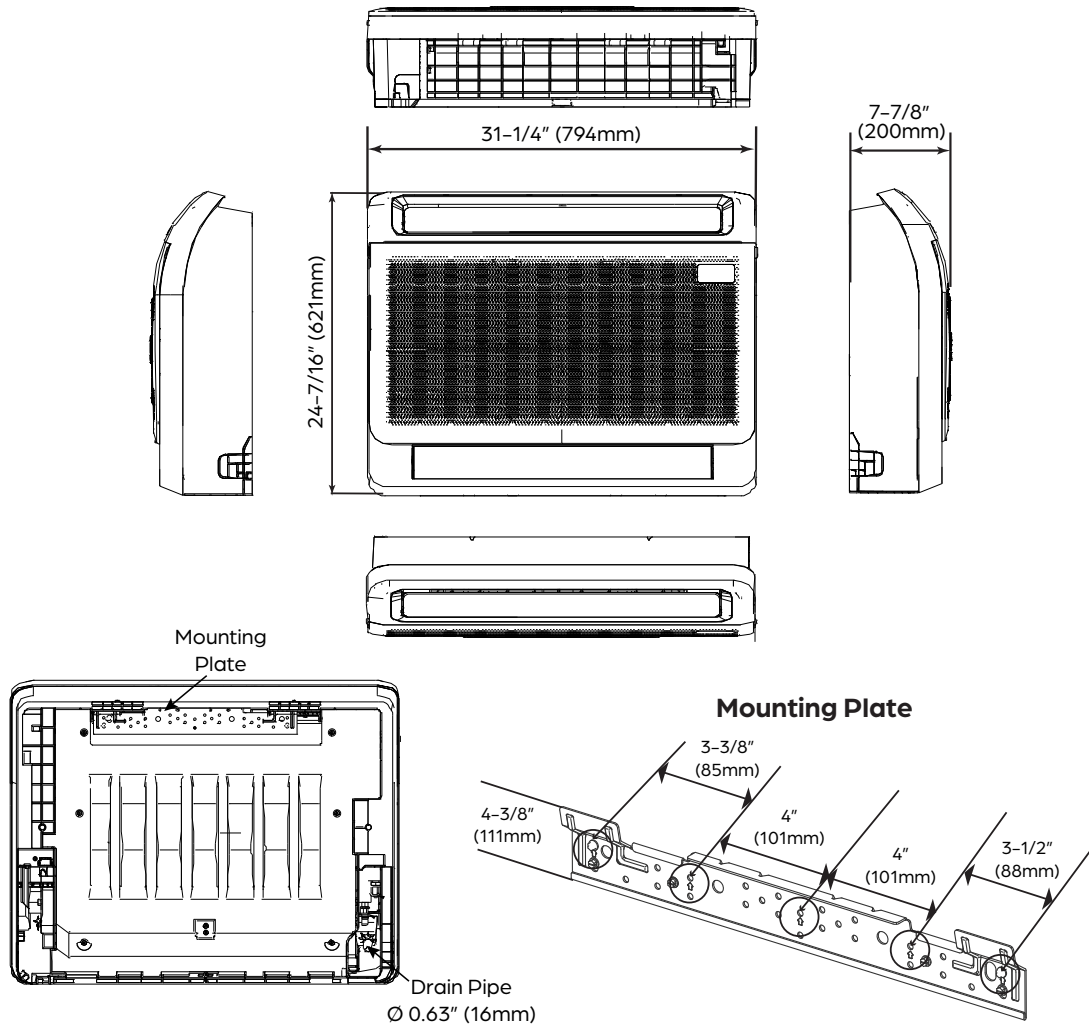

### Clearances

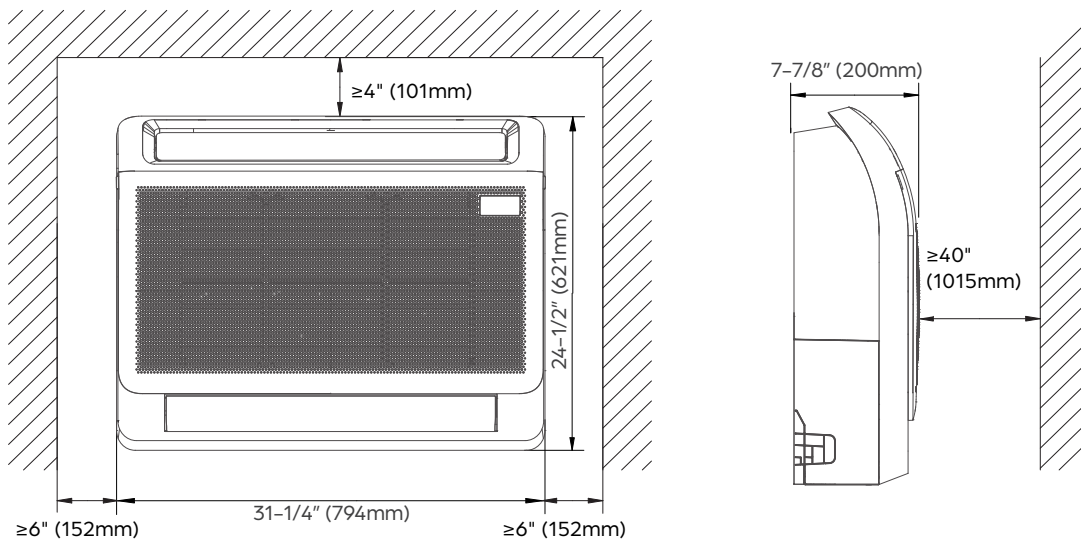

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC

www.durastar.com