



## 6,000 BTU/H WALL MOUNT

SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_



ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

Indoor Unit (IDU): DRAW06F2A	Wireless Remote Control
	

### PRODUCT FEATURES

- High efficiency rating, up to 25.3 SEER2
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Auto restart
- 46°F freeze protection
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø3/8 (Ø9.52)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	28-11/16 (729)
	Depth	7-7/8 (200)
	Height	11-1/2 (292)
Carton Dimensions (in. (mm))	Width	31-1/8 (790)
	Depth	10-5/8 (270)
	Height	14-3/4 (375)
Net Weight (lbs. (kg))	17.6 (8.0)	
Gross Weight (lbs. (kg))	23.1 (10.5)	

### SPECIFICATIONS

Cooling Capacity (BTU/hr)	6000	
Heating Capacity (BTU/hr)	7000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	N/A
	Low	141 (240)
	Medium	177 (300)
	High	235 (400)
	Turbo	294 (500)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø5/8 (Ø16)	
Sound Pressure (dB(A))	Silent	20
	Low	24
	Medium	32
	High	37
	Turbo	42



Intertek

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC


www.durastar.com




## 6,000 BTU/H WALL MOUNT

IDU DIMENSIONS - DRAW06F2A

### Unit Dimensions

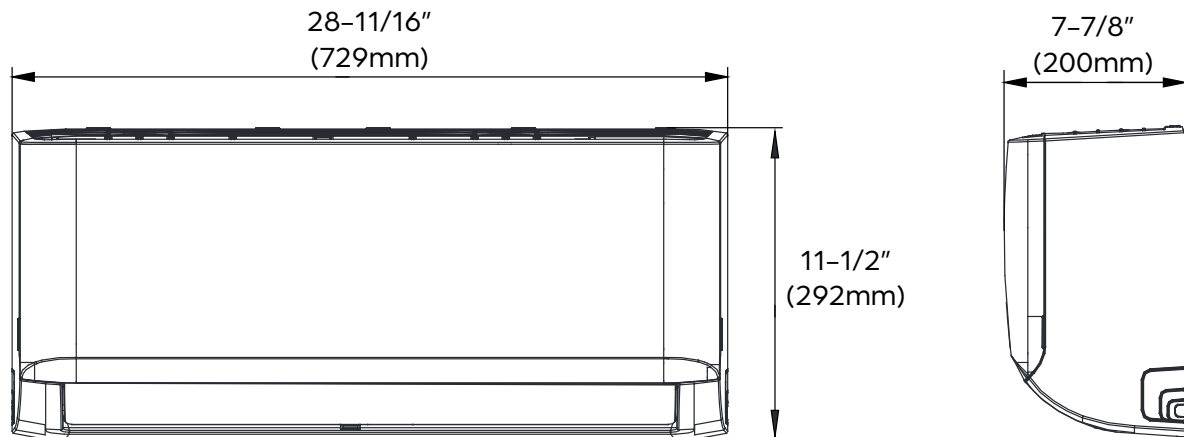


### Mounting Plate Dimensions

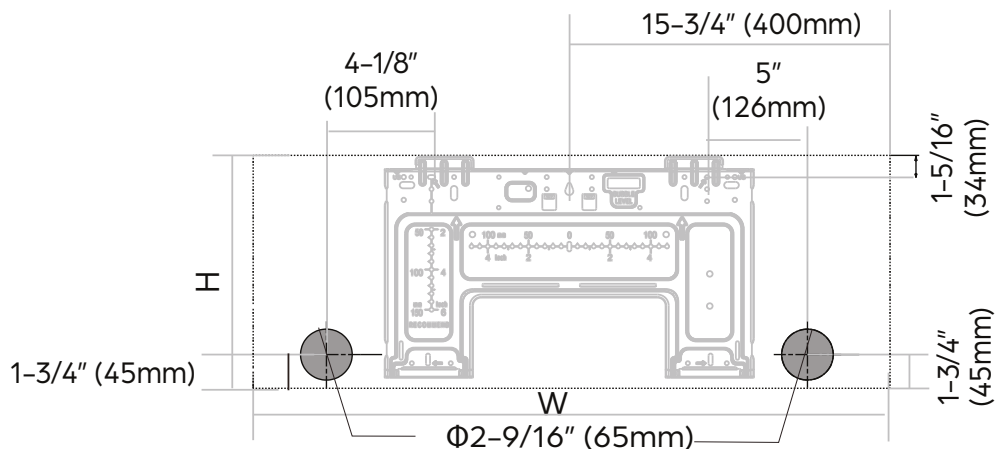

Indoor unit dimensions (WxH):  
 $28\text{--}11/16"$  (729mm) x  $11\text{--}1/2"$  (292mm)

### Clearance Distances

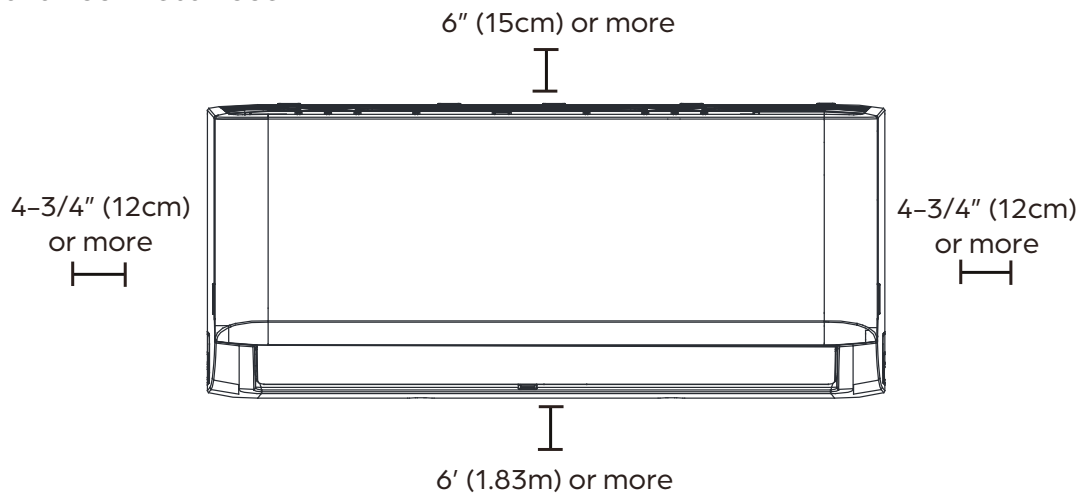

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC

[www.durastar.com](http://www.durastar.com)