



# 18,000 BTU/H WALL MOUNT

SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_



ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

REFERENCE \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

Indoor Unit (IDU): DRAW18F2A	Wireless Remote Control
	

## PRODUCT FEATURES

- High efficiency rating, up to 24 SEER2
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Auto restart
- 46°F freeze protection
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø1/4 (Ø6.35)
Gas (in. (mm))	Ø1/2 (Ø12.7)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	42-5/8 (1082)
	Depth	9-1/4 (234)
	Height	13-1/4 (337)
Carton Dimensions (in. (mm))	Width	45-1/2 (1155)
	Depth	12-7/16 (315)
	Height	16-5/16 (415)
Net Weight (lbs. (kg))	30.4 (13.8)	
Gross Weight (lbs. (kg))	39.7 (18.0)	

## SPECIFICATIONS

Cooling Capacity (BTU/hr)	18000	
Heating Capacity (BTU/hr)	18000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	N/A
	Low	371 (630)
	Medium	441 (750)
	High	500 (850)
	Turbo	759 (1290)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø5/8 (Ø16)	
Sound Pressure (dB(A))	Silent	20
	Low	26
	Medium	40
	High	45
	Turbo	54



Intertek

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC


www.durastar.com




**18,000 BTU/H WALL MOUNT**

IDU DIMENSIONS – DRAW18F2A

**Unit Dimensions**

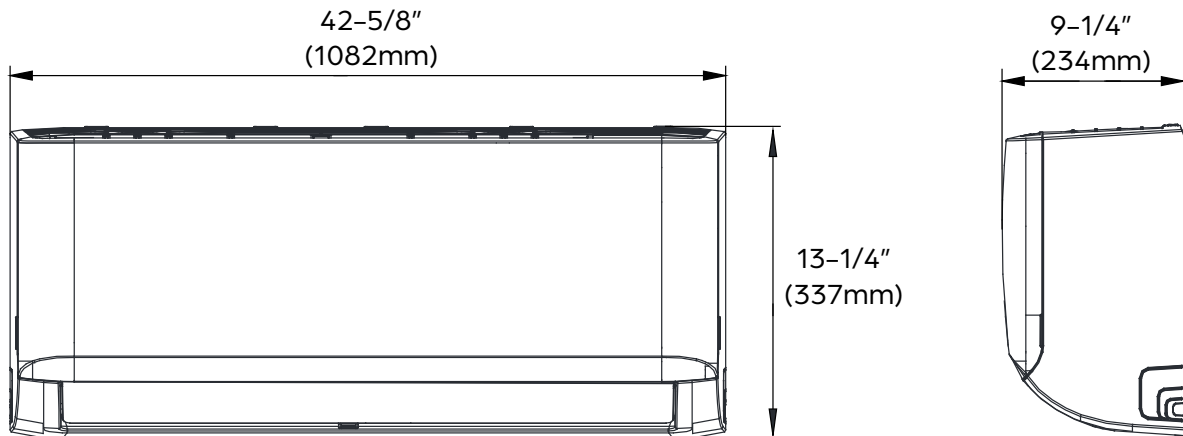

**Mounting Plate Dimensions**

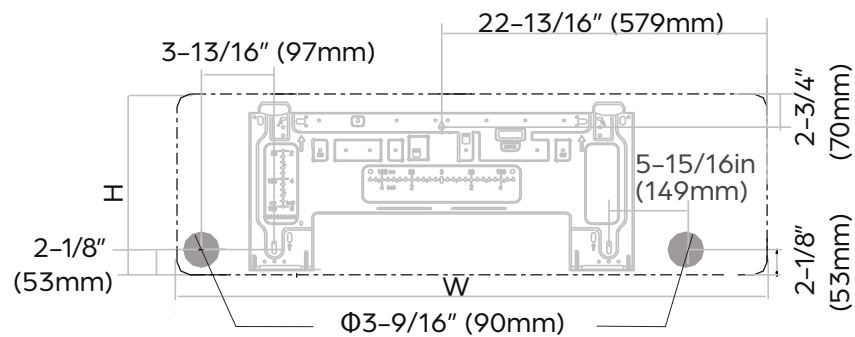

Indoor unit dimensions (WxH):  
 $42\text{--}5/8"$  (1082mm) x  $13\text{--}1/4"$  (337mm)

**Clearance Distances**

