

PROJECT NAME _____

LOCATION _____




ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAW24F2A	Outdoor Unit (ODU): DRA1H24S2A	Wireless Remote Control
		

PRODUCT FEATURES

- Up to 100% heating capacity at 0°F
- Low ambient heating down to -22°F
- Low ambient cooling down to -22°F
- A2L refrigerant detection system
- Variable speed inverter compressor
- Quiet operation
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Auto restart
- 46°F freeze protection
- Included base pan heater
- Anti-corrosive fin coating
- Compatible with DRSTAT101 wired thermostat

CAPACITIES		
Cooling Capacity (BTU/hr)	Rated at 95°F (35°C) ¹	23000
	at 109°F (43°C)	19800
	at 5°F (-15°C)	22600
	Cooling Range	16800~24500
Heating Capacity (BTU/hr)	Rated at 47°F (8°C) ²	26000
	Rated at 17°F (-8°C) ³	21600
	Rated at 5°F (-15°C) ⁴	24000
	at -13°F (-25°C)	15800
	at -22°F (-30°C)	12400
	Heating Range	11800~2810

SYSTEM DATA	
Refrigerant Type	R-454B
Refrigerant Charge (oz. (kg))	63.5 (1.80)
Design Pressure (PSIG)	550/340
Indoor/ Outdoor Coil Coating	Golden Fin Coating

EFFICIENCY DATA	
SEER2	22.3
EER2	12.5
HSPF2	13.3
COP at 47°F (8°C) ²	3.05
COP at 17°F (-8°C) ³	2.60
COP at 5°F (-15°C) ⁴	2.00



SIRIUS HEAT™ WALL MOUNT HEAT PUMP SYSTEM

24,000 BTU/H

SPECIFICATIONS

LINE SET REQUIREMENTS	
Connection Type	Flare
Liquid (in. (mm))	Ø3/8" (Ø9.52)
Gas (in. (mm))	Ø5/8" (Ø16)
Pre-Charge Length (ft. (m))	25 (7.5)
Minimum Length (ft. (m))	10 (3.0)
Maximum Length (ft. (m))	164 (50.0)
Maximum Height Differential (ft. (m))	82 (25.0)
Additional Refrigerant (oz./ft (g/m))	0.32 (30)

OUTDOOR UNIT		
Unit Dimensions	Width	37-1/4 (946)
	Depth	16-1/8 (410)
	Height	31-7/8 (810)
Carton Dimensions	Width	42-15/16" (1090)
	Depth	19-11/16" (500)
	Height	34-7/8" (885)
Net Weight (lbs. (kg))	130.3 (59.1)	
Gross Weight (lbs. (kg))	141.3 (64.1)	
Cooling Operating Temp. (°F (°C))	-22 - 122 (-30 - 50)	
Heating Operating Temp. (°F (°C))	-22 - 75 (-30 - 24)	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Recommended Breaker (Amps)	25	
Minimum Circuit Ampacity (Amps)	25	
Communication Wire Size	14*4 AWG Stranded	
Rated Current - Cooling (Amps) ¹	8.4	
Rated Current - Heating (Amps) ²	11.2	
Sound Pressure (dB(A))	61	

¹ Value at AHR1 Rated Capacity at 95°F (35°C) (AFull)

² Value at AHR1 Rated Capacity at 47°F (8°C) (H1Full)


³ Value at AHR1 Rated Capacity at 17°F (-8°C) (H32)

⁴ Value at AHR1 Rated Capacity at 5°F (-15°C) (H42)


INDOOR UNIT		
Unit Dimensions (in. (mm))	Width	42-5/8 (1082)
	Depth	9-1/4 (234)
	Height	13-1/4 (337)
Carton Dimensions (in. (mm))	Width	45-1/2 (1155)
	Depth	12-7/16 (315)
	Height	16-5/16 (415)
Net Weight (lbs. (kg))	30.8(14)	
Gross Weight (lbs. (kg))	40.6 (18.4)	
Indoor Unit Air Flow (CFM (m³/h))	Low	383 (650)
	Medium	459 (780)
	High	589 (1000)
	Turbo	759 (1290)
Moisture Removal (Pints/day (L/h))	101 (2.6)	
Drain Port O.D. (in. (mm))	Ø5/8 (Ø16)	
Recommended Breaker (Amps)	15	
Minimum Circuit Ampacity (Amps)	3.0	
Sound Pressure (dB(A))	Silent	21
	Low	35
	Medium	44
	High	50
	Turbo	55

COMPRESSOR	
Type	DC Rotary Inverter
Oil Type	Ester Oil VG74
Oil Charge (oz. (ml))	21 (620)

Unit Dimensions

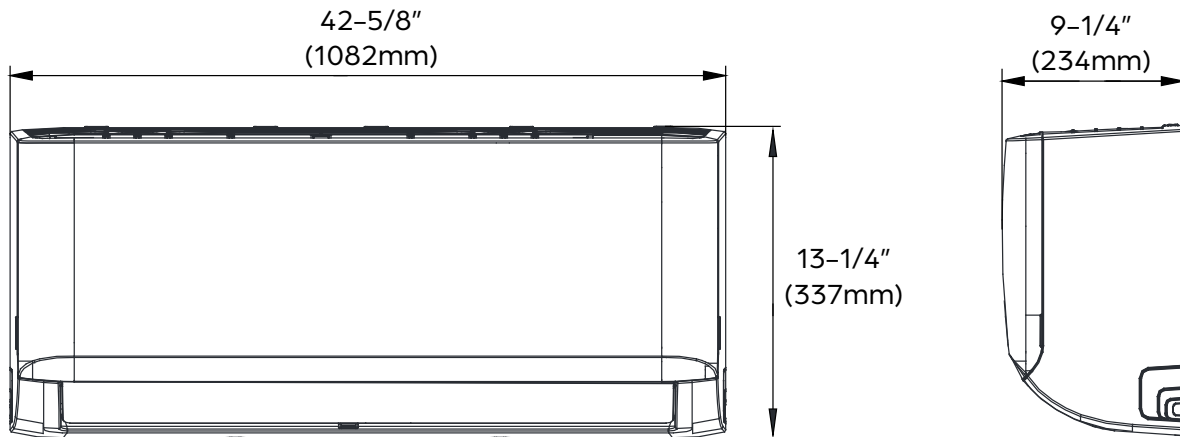


Mounting Plate Dimensions

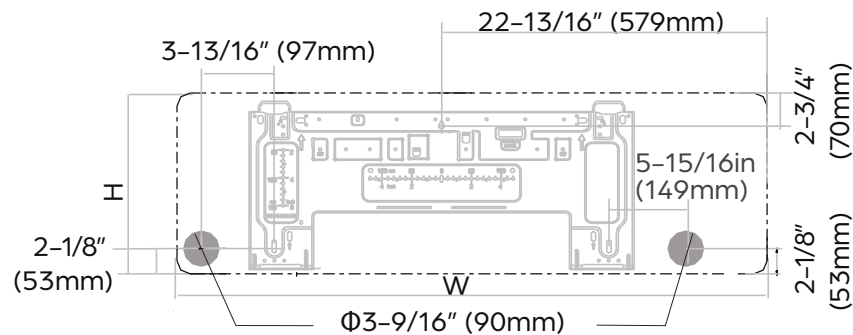


Indoor unit dimensions (WxH):
42-5/8" (1082mm) x 13-1/4" (337mm)


Clearance Distances

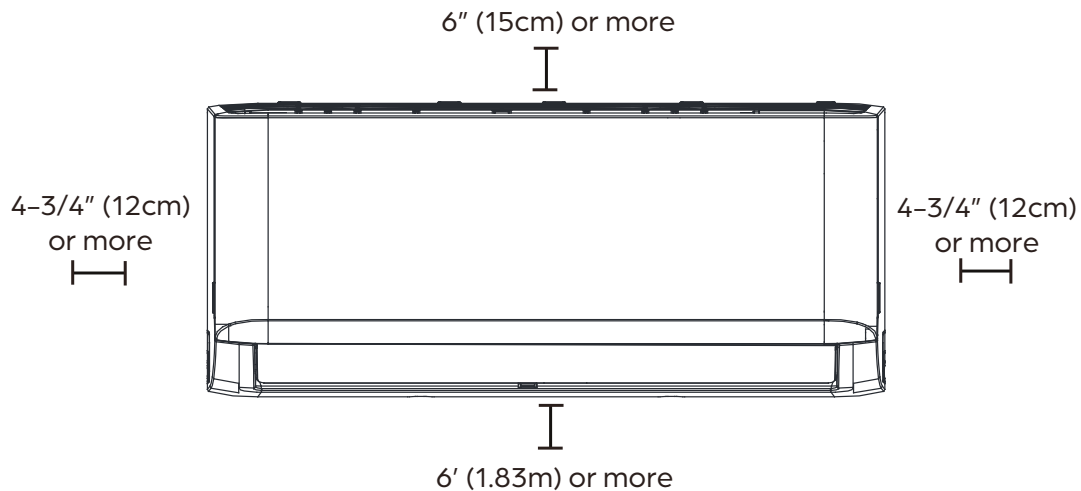

Clearances

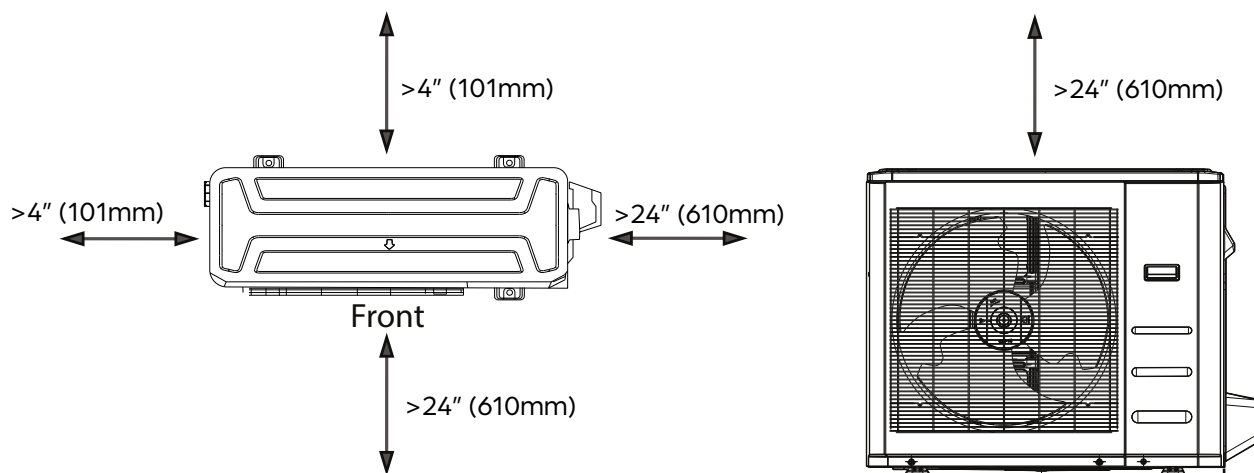

Dimensions

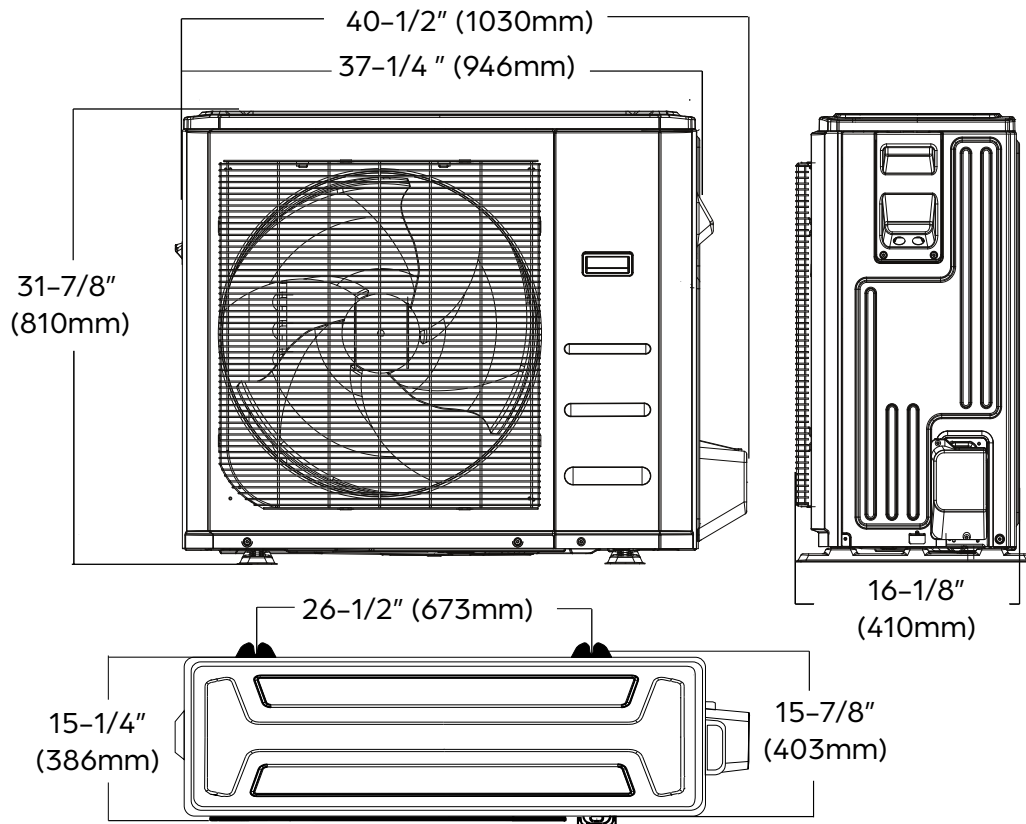

NOTE

Illustrations in this document are for explanatory purposes. The actual shape of your mini-split equipment may vary slightly.