



24,000 BTU/H WALL MOUNT

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____



ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAW24F2A	Wireless Remote Control
	

PRODUCT FEATURES

- High efficiency rating, up to 23.5 SEER2
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Auto restart
- 46°F freeze protection
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø3/8" (Ø9.52)
Gas (in. (mm))	Ø5/8" (Ø16)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	42-5/8 (1082)
	Depth	9-1/4 (234)
	Height	13-1/4 (337)
Carton Dimensions (in. (mm))	Width	45-1/2 (1155)
	Depth	12-7/16 (315)
	Height	16-5/16 (415)
Net Weight (lbs. (kg))	30.9 (14.0)	
Gross Weight (lbs. (kg))	40.6 (18.4)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	24000	
Heating Capacity (BTU/hr)	25000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	N/A
	Low	383 (650)
	Medium	459 (780)
	High	587 (1000)
	Turbo	759 (1290)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø5/8 (Ø16)	
Sound Pressure (dB(A))	Silent	21
	Low	28
	Medium	44
	High	49
	Turbo	54




Intertek

Specifications are subject to change without notice.


© 2025 Ferguson Enterprises LLC

www.durastar.com

Unit Dimensions

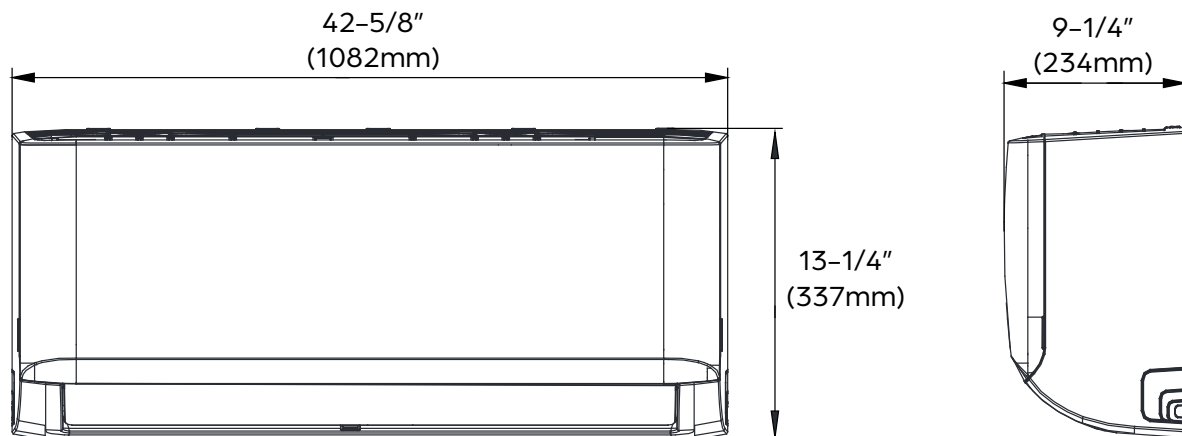

Mounting Plate Dimensions

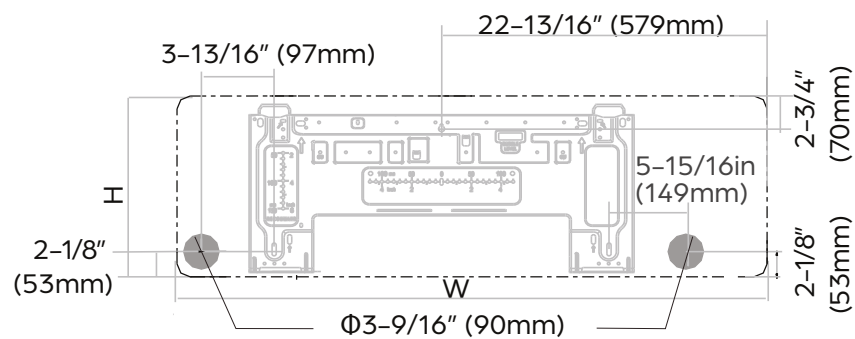

Indoor unit dimensions (WxH):
42-5/8" (1082mm) x 13-1/4" (337mm)

Clearance Distances

