



33,000 BTU/H WALL MOUNT

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____



ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

REFERENCE _____

SUBMITTED BY _____ DATE _____

Indoor Unit (IDU): DRAW33F2A	Wireless Remote Control
	

PRODUCT FEATURES

- High efficiency rating, up to 20 SEER2
- A2L refrigerant detection system
- Wireless remote control with "Follow Me" technology
- Turbo, ECO, Active Clean, Sleep modes and more
- Auto restart
- 46°F freeze protection
- Compatible with DRSTAT101 wired thermostat

LINE SET REQUIREMENTS	
Refrigerant Type	R-454B
Design Pressure (PSIG)	550/340
Connection Type	Flare
Liquid (in. (mm))	Ø3/8" (Ø9.52)
Gas (in. (mm))	Ø5/8" (Ø16)

DIMENSIONS AND WEIGHT		
Unit Dimensions (in. (mm))	Width	49-9/16 (1259)
	Depth	11-1/8 (283)
	Height	14-1/4 (362)
Carton Dimensions (in. (mm))	Width	52-3/4 (1340)
	Depth	15-3/16 (385)
	Height	17-3/4 (450)
Net Weight (lbs. (kg))	43.2 (19.6)	
Gross Weight (lbs. (kg))	57.3 (26.0)	

SPECIFICATIONS

Cooling Capacity (BTU/hr)	33000	
Heating Capacity (BTU/hr)	36000	
Voltage/Phase/Frequency	208-230V, 1 Phase, 60 Hz	
Voltage Range	187-253V	
Indoor Coil Coating	Golden Fin Coating	
Indoor Unit Air Flow (CFM (m³/h))	Silent	N/A
	Low	383 (650)
	Medium	459 (780)
	High	587 (1000)
	Turbo	759 (1290)
Field Supplied Drain Pipe O.D. (in. (mm))	Ø5/8 (Ø16)	
Sound Pressure (dB(A))	Silent	21
	Low	28
	Medium	44
	High	49
	Turbo	54



Intertek

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC


www.durastar.com




33,000 BTU/H WALL MOUNT

IDU DIMENSIONS - DRAW33F2A


Unit Dimensions

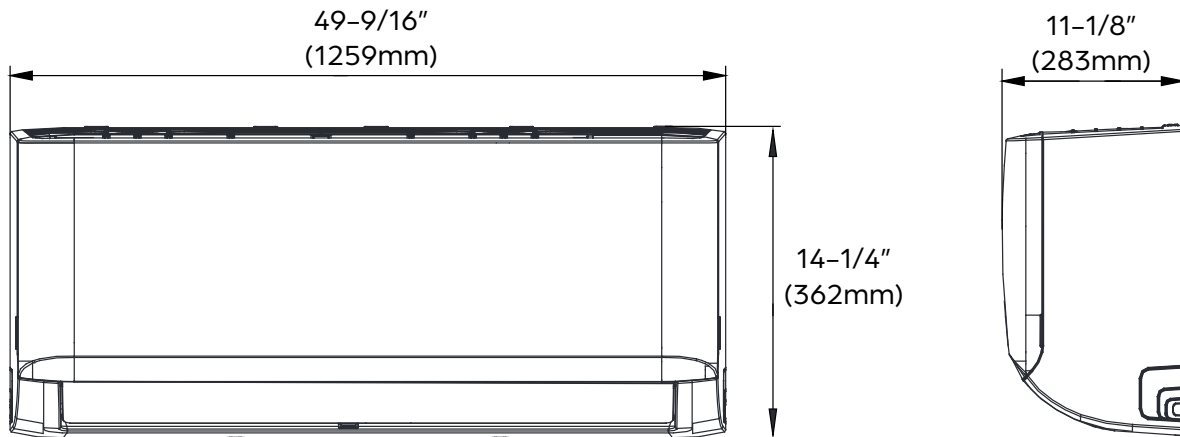

Mounting Plate Dimensions

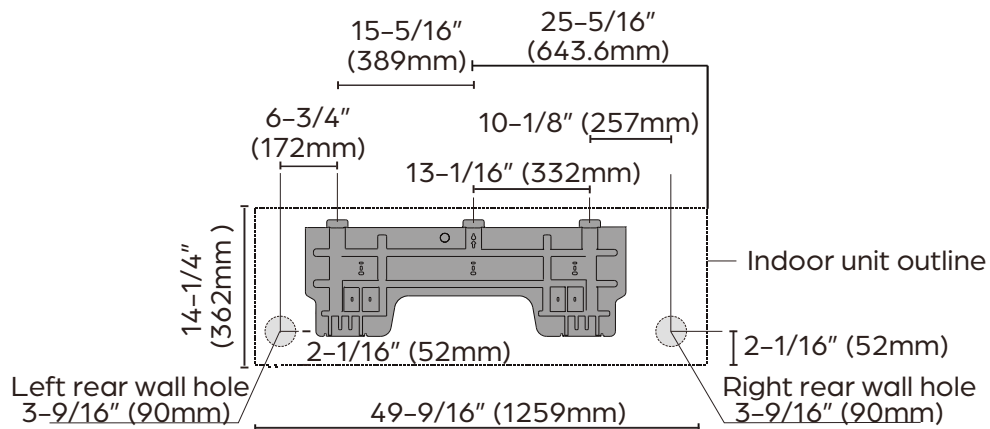

Clearance Distances

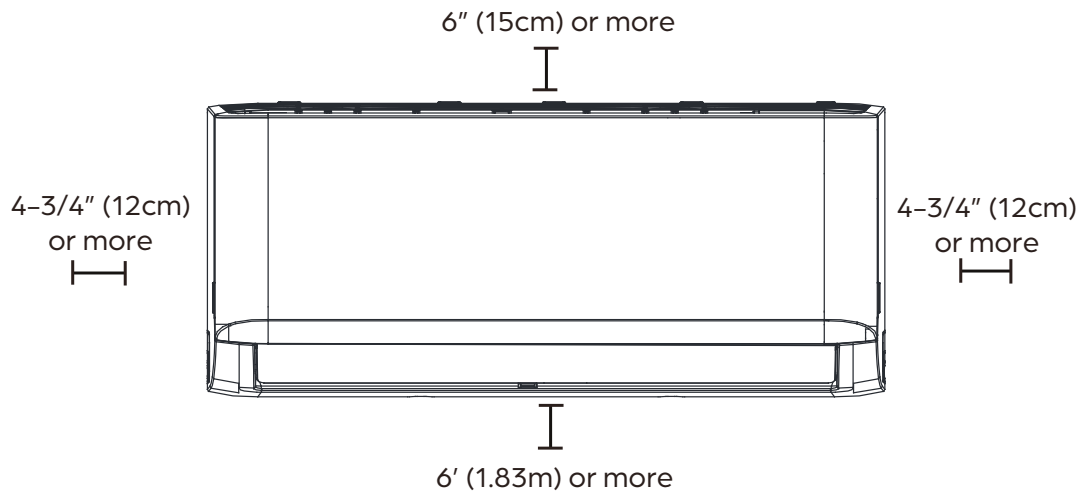

Specifications are subject to change without notice.

© 2025 Ferguson Enterprises LLC

www.durastar.com