

SUBMITTAL - 09KUAS1C

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **ACUH09KUAS**

Outdoor Unit: **AOUH09KUAS1**



FEATURES

INDOOR UNIT:

- Compact cassette indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 28dB
- Multiple fan speed options; Auto, High, Med, Low, and Quiet
- Special Operation modes available:
 - Economy Mode/ Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Seamless control using the Optional Wireless Remote Controller (UTY-LNTU)
 - Optional Wi-Fi connectivity enables remote monitoring through the Airstage Mobile App
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with Building Management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Built-in drain pump for efficient water removal making installation and maintenance easier
- Optional fresh air kit, designed to boost indoor air quality and comfort
- Cassette grille (front panel) fits seamlessly into standard grid-style office ceilings (sold separately)
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Multiple Auxiliary Heat logic options for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)
 - Offers group control, allowing seamless management of multiple units simultaneously.

OUTDOOR UNIT:

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Compact outdoor unit with extended line set lengths up to 66ft (20m)
- Up to 33% higher rated heating capacity than nominal capacity



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250409A

SUBMITTAL - 09KUAS1C

SPECIFICATIONS:

Indoor Unit				ACUH09KUAS		
Outdoor Unit				AOUH09KUAS1		
System Name				09KUAS1C		
AHRI Number				215434545		
SEER2		Cooling		Btu/hW	24.4	
EER2					14.5	
HSPF 2 (IV) / HSPF 2 (V)		Heating		kW/kW	11.8 / 9.3	
COP2					3.78	
Outdoor Operation Range		Cooling		°F (°C)	-5 to 122*8 (-21 to 50*8)	
		Heating			-5 to 75 (-21 to 24)	
Indoor Capacity		Cooling		Rated	9000	
				Min.—Max.	3,100—11,000	
		Heating	47°FDB (Outdoor temp.)	Rated	12000	
			17°FDB (Outdoor temp.) ^{*1}	Min.—Max.	3,100—16,000	
				Rated	7900	
				Max.	11200	
			5°FDB (Outdoor temp.) ^{*2}	Rated	10100	
				Max.		
Outdoor Connection pipe		Size		in (mm)	Ø1/4 (Ø6.35)	
					Gas	Ø3/8 (Ø9.52)
		Method			FLARE	
		Pre-charge length			ft (m)	49 (15)
		Min. length				16 (5)
		Max. length				66 (20)
		Max. height difference				49 (15)
Indoor Dimensions (H × W × D)		Net		in (mm)	9-5/8 × 22-7/16 × 22-7/16 (245 × 570 × 570)	
		Gross			10-7/16 × 28-3/4 × 24-5/8 (265 × 730 × 625)	
Indoor Weight		Net		lb (kg)	33 (15)	
		Gross			40 (18)	
Outdoor Dimensions (H × W × D)		Net		in (mm)	21-5/16 × 31-7/16 × 11-7/16 (542 × 799 × 290)	
		Gross			23-11/16 × 37 × 14-3/4 (602 × 940 × 375)	
Outdoor Weight		Net		lb (kg)	71 (32)	
		Gross			77 (35)	
Indoor Fan		Cooling		High	318 (540)	
				Med	288 (490)	
				Low	259 (440)	
				Quiet	230 (390)	
		Heating		High	318 (540)	
				Med	288 (490)	
				Low	259 (440)	
				Quiet	230 (390)	
		Type × Qty			TURBO FAN × 1	
		Motor output			W	54
Outdoor Fan		Airflow rate	Cooling	CFM (m³/h)	906 (1,540)	
			Heating			
		Type × Qty			PROPELLER FAN × 1	
Indoor Sound Pressure Level ^{*4}		Motor output		dB (A)	23	
					34	
		Cooling	High		32	
			Med		30	
			Low		28	
			Quiet		34	
		Heating	High		32	
			Med		30	
Low	28					
Quiet	44					
Outdoor Sound Pressure Level ^{*4}		Cooling			48	
		Heating				

SUBMITTAL - 09KUAS1C

SPECIFICATIONS:

Outdoor Refrigerant		Type		R32	
		Charge	lb oz	1 lb 14 oz	
			g	850	
Additional Charge Calculation			oz/ft	0.22	
			g/m	20	
Outdoor Refrigerant Oil		Type		POE (RB68A)	
		Amount	in ³ (cm ³)	20.7 (340)	
Indoor Moisture removal			pints/h (L/h)	1.3 (0.6)	
Indoor Drain hose		Material		POLYVINYL CHLORIDE	
		Tip Diameter		I.D.: Ø1 (Ø25.0), O.D.: Ø1-1/4 (Ø32.0)	
Indoor Operation range		Cooling	°F (°C)	64 to 90 (18 to 32)	
			%RH	80 or less	
		Heating	°F (°C)	60 to 86 (16 to 30)	
Power Supply				208/230 V~ 60 Hz	
Available Voltage Range				187—253	
System power supply		Voltage		V	
		Frequency		Hz	
		Available voltage range		V	
Indoor Current	Cooling		A	3.3	
	Heating			4.5	
Maximum Operating Current ^{*3}				Cooling	6.4
				Heating	8.9
Outdoor Starting Current				4.5	
MCA ^{*5}				8.9	
Wiring spec. ^{*6}		MAX. CKT. BKR ^{*7}		15	
Indoor Input Power	Cooling			Rated	0.62
			Min.—Max.	0.14—0.90	
	Heating	Rated	0.93		
		Min.—Max.	0.15—1.72		
		Rated	0.77		
		Max.	1.42		
		Rated	1.33		
		Max.			
Indoor Power Factor	Cooling		%	81.7	
	Heating			89.9	
Energy Star ^{*9}				ES, ESCC, ESME	

NOTES:

- Cooling: Indoor temperature of 80°F (26.67°CDB)/67°FWB (19.44°CWB), and outdoor temperature of 95°FDB (35°CDB)/75°FWB (23.9°CWB).
- Heating: Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 47°FDB (8.33°CDB)/43°FWB (6.11°CWB).
- 17°FDB (Outdoor temp.),
- 5°FDB (Outdoor temp.)
- *1: Heating (17°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 17°FDB (-8.33°CDB)/15°FWB (-9.44°CWB).
- *2: Heating (5°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 5°FDB (-15.0°CDB)/4°FWB (-15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.

- *4: Measured values in manufacturer's anechoic chamber.
- Indoor Sound Pressure Level,
- Outdoor Sound Pressure Level
- Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- *3:

- Maximum Operating Current – Maximum current is maximum value when operated within the operation range.
- The total current of indoor unit and outdoor unit.

- MCA – *5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)

- *6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.

- Wiring spec. As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.

- MAX. CKT. BKR – *7: Maximum Circuit Breaker

- Operation Range – *8: Suction temperature of the outdoor unit.

- Energy Star – *9: ES = Energy Star, ESCC = Energy Star Cold Climate, ESME = Energy Star Most Efficient.

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

SUBMITTAL - 09KUAS1C

ACCESSORIES:

Model Number	Description
UTY-RVRU	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5	Touch Panel Wired Remote Controller
UTY-RHRY	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY	Simple Wired Remote (With Mode Function)
UTY-LNTU	Wireless Remote Controller (Compact Cassette)
UTY-TFSXJ4	Wi-Fi adapter (WiFi Interface Module UART Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX	External Switch Controller
UTY-TTRXZ1 ^{*1}	24V Thermostat Interface
TTRXZ1-KIT ^{*1}	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WiFi Plug & 24V Transformer)
UTY-XCSX	External input and output PCB
UTY-XWZXZG	External Connect Kit
UTZ-GXEA	External input and output PCB box
UTZ-KXGC	High Humidity Insulation Kit
UTR-YDZB	Air Outlet Shutter Plate
UTZ-VXAA	Fresh Air Intake Kit
UTY-DSGYZ2 ^{*2}	Airstage Edge Controller
UTZ-DUHGG2A	Hail Guard
UTZ-DUSHG2A	Snowhood
UTZ-DUWBG2A	Wind Baffle
UTG-CCGFGA	Cassette Grille

NOTES:


*1 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

*2 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

SUBMITTAL - 09KUAS1C

INDOOR UNIT DIMENSIONS:

Unit: in (mm)

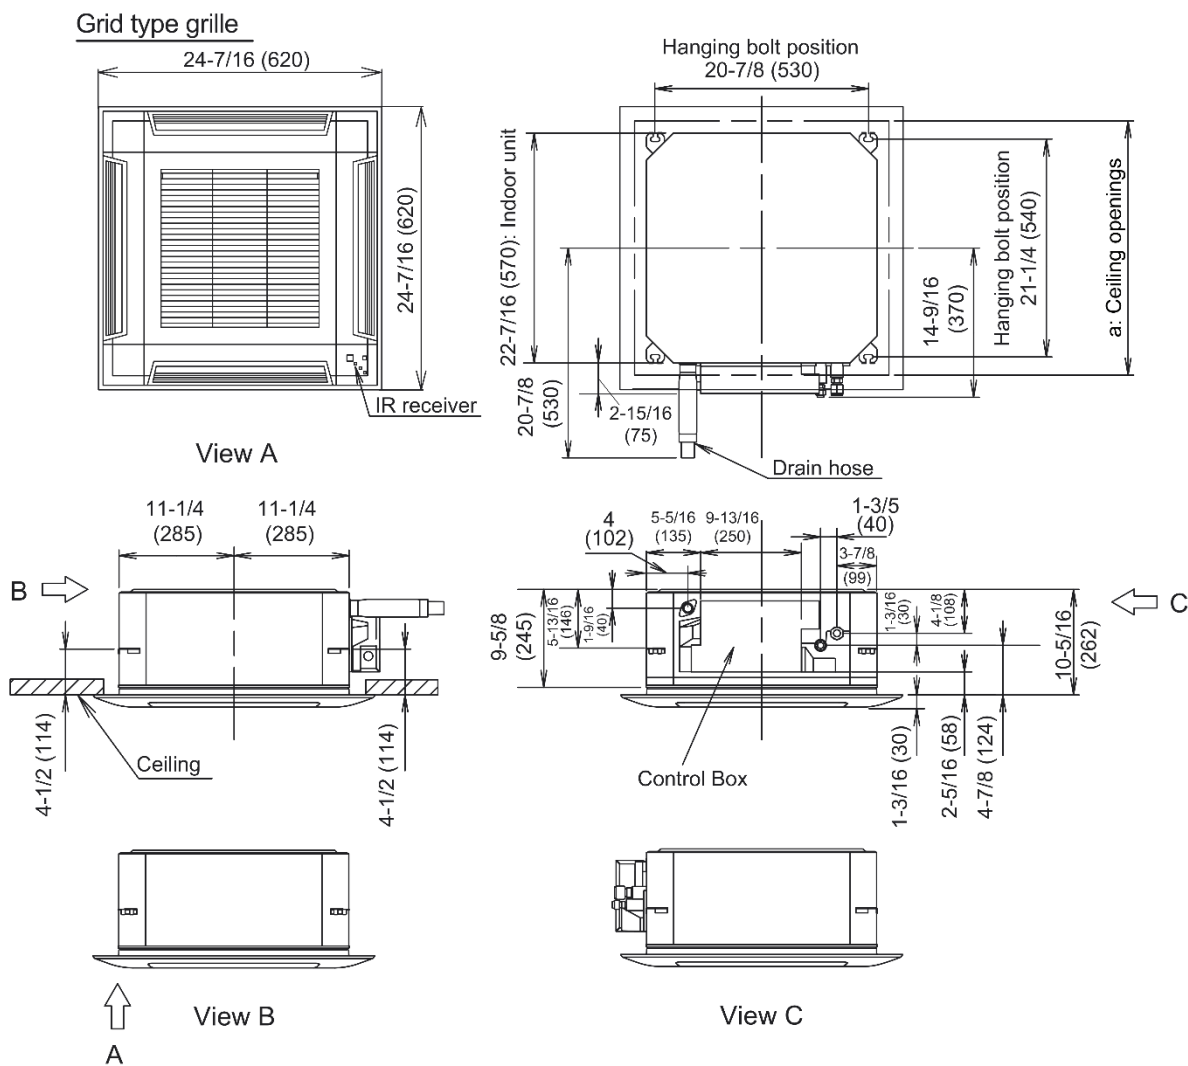


a: Ceiling openings			
Cassette grille	Grid type	in (mm)	22-13/16 to 24 (580 to 610)


SUBMITTAL - 09KUAS1C

OUTDOOR UNIT DIMENSIONS:


Unit: in (mm)

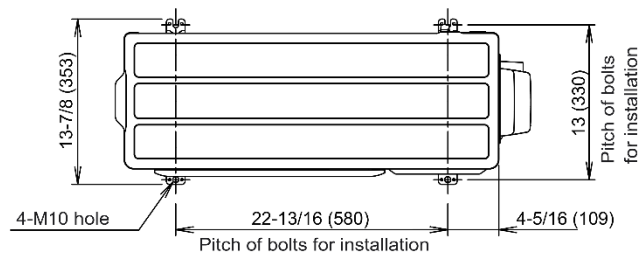


Top view




Side view

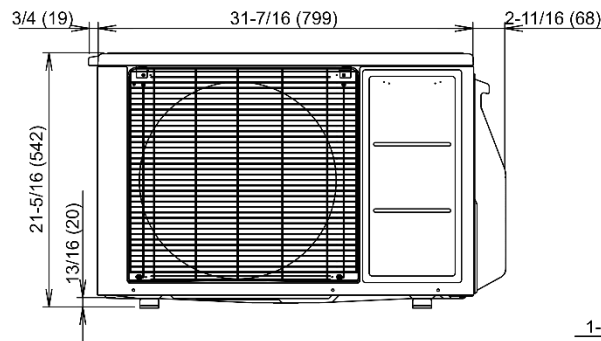


Front view

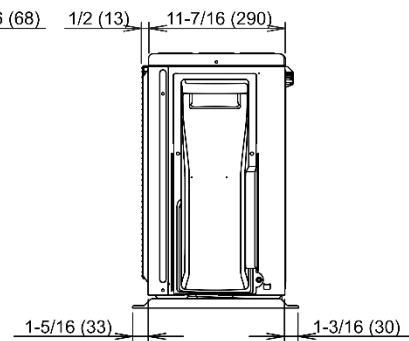

Side view

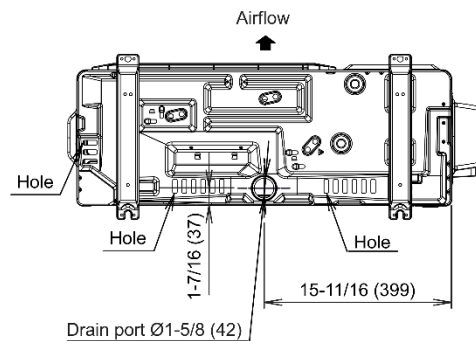

Bottom view

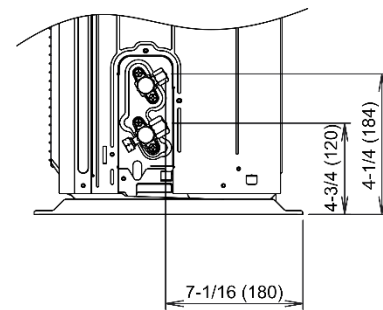

Side view (Valve part)

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2025 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Version: 20250409A