



Submittal Data Sheet

R-32 --- 0.75- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF09AXVJU

FEATURES

- Inverter
- Power-airflow Dual Flaps
- Wide Angle Louvers
- Vericle Auto-Swing (Up and Down)
- Auto Fan Speed
- Quiet Operation
- Auto Defrosting
- Automatic Operation
- Programme Dry Function
- Fan Only Mode
- Sleep mode
- R/C with backlight & Signal Receiving Sign
- Catechin Filter/Green Tea Filter
- Titanium Apatite Air-Purifying Filter
- Wipe Clean Flat Panel
- Auto Restart (after power failure)
- Self-Diagnosis



BENEFITS

- R-32 Easy, Proven, Efficient, Available
- Inverter Technology Reduces Energy Cost
- Uniform Air Circualtion
- Optimal Comfort
- Quiet Operations
- Clean and Purified Indoor Air
- Easy to Clean
- Worry Free operation



Submittal Data Sheet

R-32 --- 0.75- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF09AXVJU

PERFORMANCE

Indoor Unit Model No.	FTXF09AXVJU	Indoor Unit Name:	R-32 --- 0.75- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
Type:		Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	9,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	9,000	Rated Piping Length(ft):	25
Cooling Input Power (kW):	2.640	Rated Height Separation (ft):	0
Rated Heating Capacity (Btu/hr):	10,000		
Heating Input Power (kW):	2.93		

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (HH/H/M/L/SL) (CFM):	466/431/322/249/142
Power Supply Connections:	L1, L2, L3, Ground	Moisture Removal (Gal/hr):	0.1
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-1/3 x 30-5/16 x 9-3/16	Condensate Connection (inch):	5/8
Net Weight (lb):	19.8	Sound Pressure (H/M/L/SL) (dBA):	44/37/30/19
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Power Level (dBA):	




Submittal Data Sheet

R-32 --- 0.75- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF09AXVJU

DIMENSIONAL DRAWING

Model : FTKF09/12A, FTXF09/12A

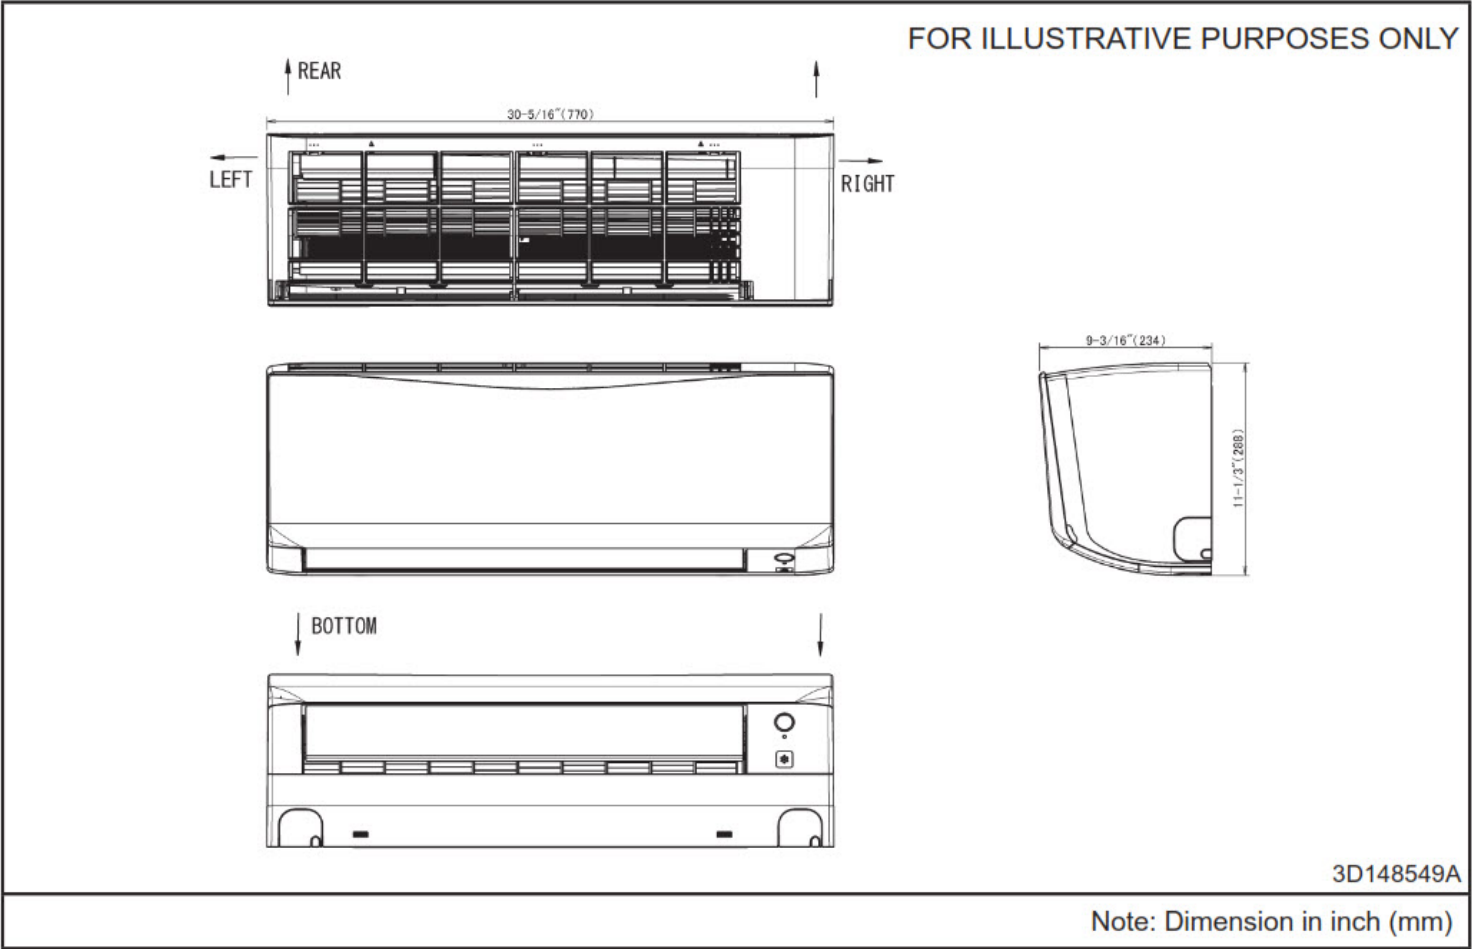



Submittal Data Sheet

R-32 --- 0.75- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF09AXVJU

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)	No
AZAI6WSPDKC	DKN Plus Interface	No
BRC51D61	Wired Remote Controller Kit	No
BRC944B2	Wired Remote Controller	No
DACA-CP1-1	Mini Aqua Condensate Pump	No
DACA-CP4-1	MINI WHITE PUMP KIT 100-250V	No
DTST-LTE-LA-A	Daikin One Lite (with Translation Adaptor for S21 only)	No
DTST-ONE-ADA-A	Daikin One+ Smart Thermostat for VRV, SkyAir, Single- and Multi-Zone System	No
DTST-TOU-ADA-A	Daikin One Touch Smart Thermostat (with Translation Adaptor for S21 and P1P2)	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No