



Submittal Data Sheet

R-32 --- 1.5- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF18BVJU9

FEATURES

- Wi-Fi built in on OTERRA Indoor Unit
- Inverter
- Power airflow dual flaps
- Wide angle Louvers
- Verticle Auto Swing (up and Down)
- Auto Fan Speed
- Quiet operation
- Auto Defrosting
- Automatic Operation
- Programme Dry Function
- Fan only Mode
- Sleep mode
- R/C with backlight &Signal receiving sign
- Catechin filter/Green Tea Filter
- Titanium Apatite Air Purifying filter
- wipe clean flat panel
- Auto Restart (after power failure)
- Self Dagnosis

BENEFITS

- R-32 Easy, Proven, Efficient, Available
- Inverter Technology reduces energy cost
- Uniform air circulation
- Optimal comfort
- quiet operations
- clean and purified indoor air
- easy to clean
- worry free operation

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

R-32 --- 1.5- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF18BVJU9

SYSTEM PERFORMANCE

Rated Cooling Capacity (Btu/hr):	18,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	14,590	Rated Piping Length(ft):	
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	
Cooling Input Power (kW):			
Rated Heating Capacity (Btu/hr):	21,600	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 122
Holding Refrigerant Charge (lbs):		Heating Operation Range (°F WB):	5 - 64
Additional Charge (oz/ft):		Max. Pipe Length (Vertical) (ft):	
Pre-charge Piping (Length) (ft):		Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):			
Max Height Separation (Ind to Ind ft):			




Submittal Data Sheet

R-32 --- 1.5- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF18BVJU9

INDOOR UNIT DETAILS

DIMENSIONAL DRAWING - INDOOR UNIT

Model : FTKF18/24A, FTXF18/24A

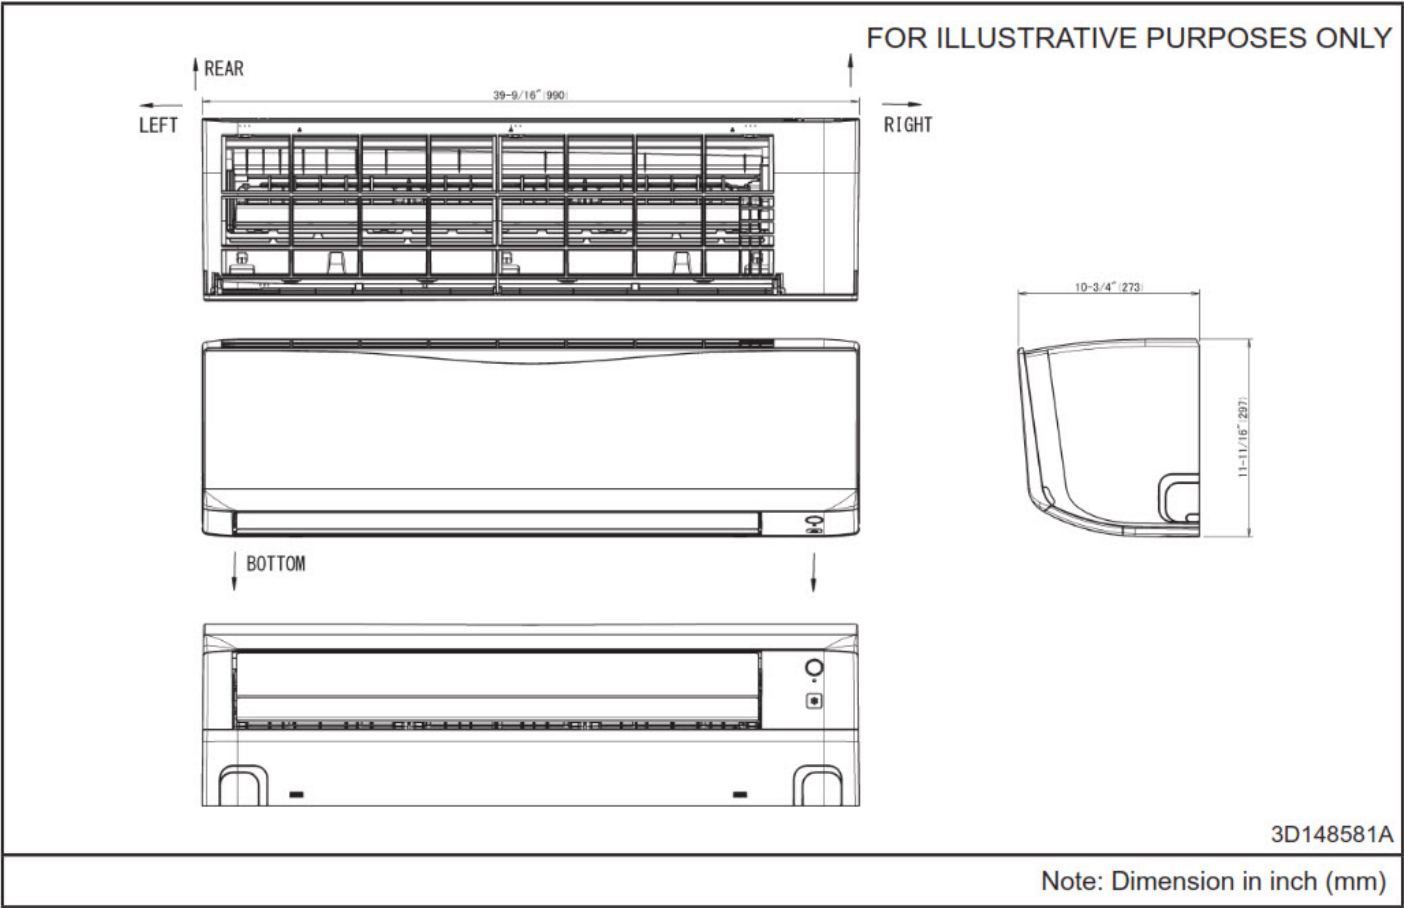


Submittal Data Sheet

R-32 --- 1.5- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF18BVJU9

OUTDOOR UNIT DETAILS

DIMENSIONAL DRAWING - OUTDOOR UNIT

Model : FTKF18/24A, FTXF18/24A

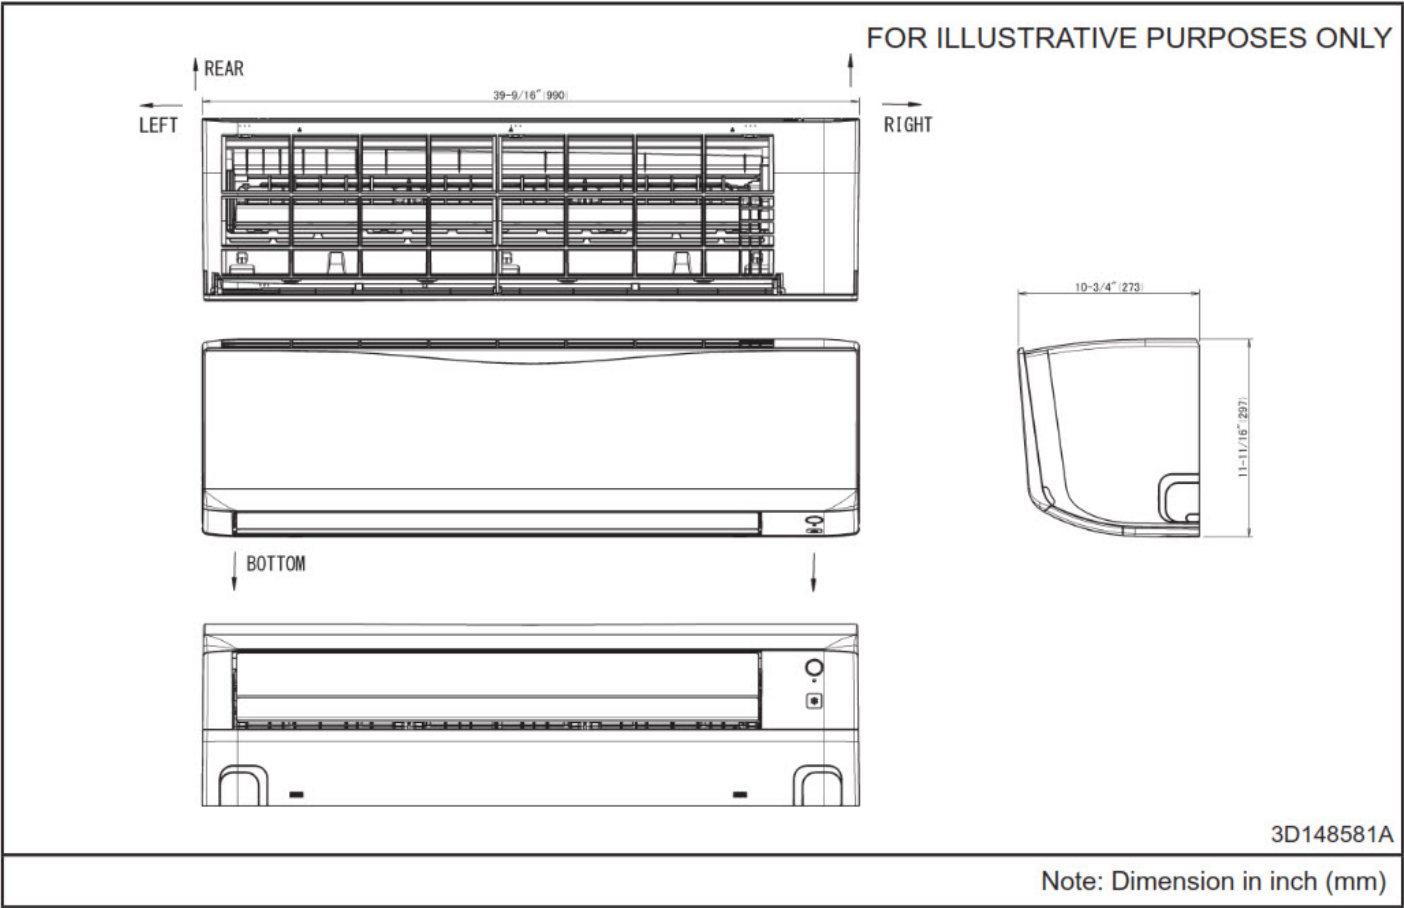



Submittal Data Sheet

R-32 --- 1.5- Ton, Heat Pump, Wall Mounted IDU Daikin OTERRA
FTXF18BVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)	No
AZAI6WSPDKC	DKN Plus Interface	No
BRC073A6	Wired Remote Controller	No
BRC944B2	Wired Remote Controller	No
BRCW901A03	BRC944B2 CONTROL CABLE, 10FT	No
BRCW901A08	Wired Remote Controller Cord - 8m/26ft	No
DCS301C71	Unified On/Off Controller	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	Yes
KKF936A4	LP CONVERSION KIT	No
KRP067A41E	Adaptor for wired remote controller	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No