



## Submittal Data Sheet

3/4 Ton Wall Mount R-32

FTXV09AVJU9

### FEATURES

- 12 Year limited Warranty for Parts and Compressor
- Sound pressure as low as 19 dB(A)
- Washable Dry Filter
- Powerful Operation mode
- Auto fan speed control
- Quick warming function

### BENEFITS

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range - Cooling (50°F - 114.8°F)
- Operating Range - Heating (-13°F - 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications





Submittal Data Sheet  
3/4 Ton Wall Mount R-32  
FTXV09AVJU9

| ELECTRICAL                                                              |  | PIPING                       |     |
|-------------------------------------------------------------------------|--|------------------------------|-----|
| Power Supply (V/Hz/Ph):<br>*See Engineering Manuals for other voltages. |  | Gas Connection:<br>(inch)    | 3/8 |
|                                                                         |  | Liquid Connection:<br>(inch) | 1/4 |
|                                                                         |  | Drain Connection:<br>(inch)  | 5/8 |

| SPECIFICATIONS                |     |                              |    |
|-------------------------------|-----|------------------------------|----|
| COOLING - Airflow Rate (cfm): |     | COOLING - Sound Level (dBA): |    |
| High:                         | 381 | High:                        | 43 |
| Med:                          | 272 | Med:                         | 35 |
| Low:                          | 230 | Low:                         | 31 |
| SuperLow:                     | 166 | SuperLow:                    | 24 |
| HEATING - Airflow Rate (cfm): |     | HEATING - Sound Level (dBA): |    |
| High:                         | 385 | High:                        | 41 |
| Med:                          | 304 | Med:                         | 35 |
| Low:                          | 230 | Low:                         | 28 |
| SuperLow:                     | 194 | SuperLow:                    | 25 |
| Dimensions (HxWxD) (in):      |     | Net Weight (lb):             |    |
| 11-1/4 x 30-5/16 x 8-3/4      |     | 19                           |    |


## Submittal Data Sheet

3/4 Ton Wall Mount R-32


FTXV09AVJU9

## DIMENSIONAL DRAWING


CTXV07AVJU9, FTXV09/12AVJU9

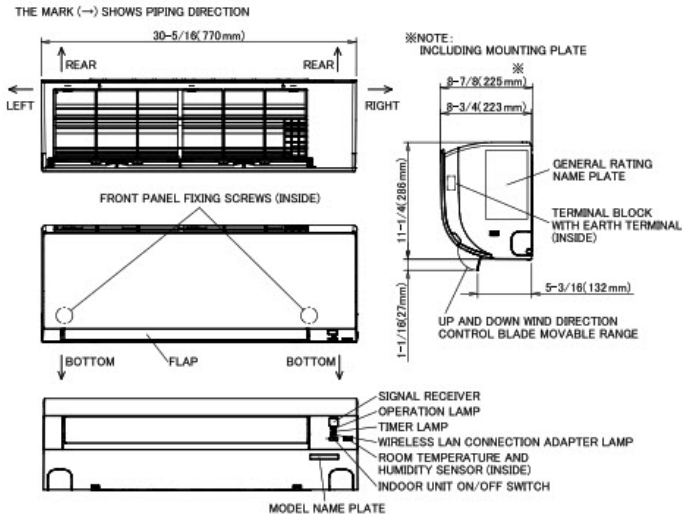


### REQUIRED SPACE

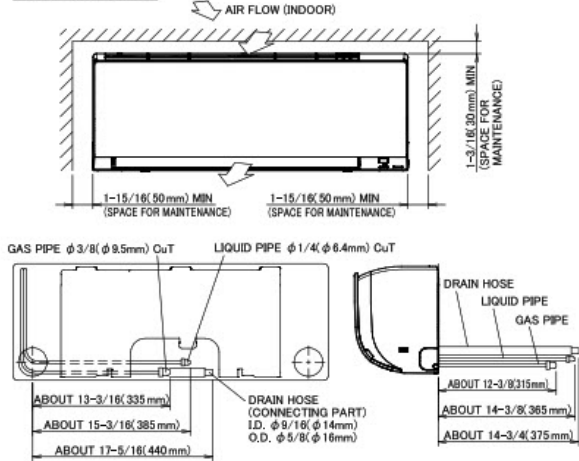


### WIRELESS REMOTE CONTROLLER (ARC480A83)



### BLADE ANGLE



### STANDARD LOCATIONS OF WALL HOLES

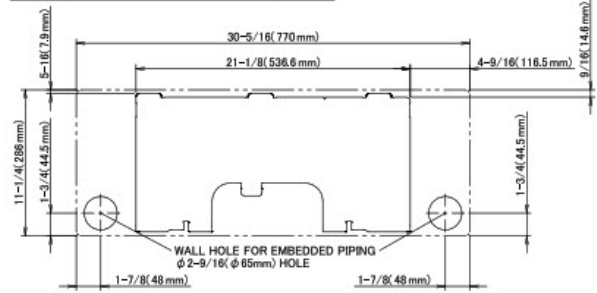

3D150958A



**Submittal Data Sheet**  
3/4 Ton Wall Mount R-32  
FTXV09AVJU9

ACCESSORIES

| PART NUMBER | DESCRIPTION                                                                 | INCLUDED |
|-------------|-----------------------------------------------------------------------------|----------|
| AZAI6WSCDKB | DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21) | No       |
| AZAI6WSPDKC | DKN Plus Interface                                                          | No       |
| BRC073A6    | Wired Remote Controller                                                     | No       |
| BRC944B2    | Wired Remote Controller                                                     | No       |
| BRCW901A03  | BRC944B2 CONTROL CABLE, 10FT                                                | No       |
| BRCW901A08  | Wired Remote Controller Cord - 8m/26ft                                      | No       |
| DACA-CP1-1  | Mini Aqua Condensate Pump                                                   | No       |
| KAF970A46   | Titanium apatite photocatalytic air-purifying filter WITHOUT frame          | No       |
| KRP067A41   | Adaptor for wired controller                                                | No       |
| KRP067A41E  | Adaptor for wired remote controller                                         | No       |
| KRP928BB2S  | RA Interface Adaptor for DIII-Net -                                         | No       |