

MSZ-FX18NL

17,200 BTU/H WALL-MOUNTED INDOOR UNIT



Job Name:

System Reference:

Date:



GENERAL FEATURES

- 3D i-see Sensor® (Built-in): The advanced sensor scans each room to produce a complete thermal profile that includes heat signatures based upon size, temperature and movement, then adjusts temperature and airflow based on user preference, and saves energy according to room occupancy.
- Dual Barrier Coating: The patented Dual Barrier Coating reduces the collection of contaminants like dust, fibers, smoke, and oil on the inner surface of the heat pump, resulting in optimal airflow and easier maintenance.
- Dual Barrier Fusion: The patented Dual Barrier Fusion reduces the collection of contaminants like dust, fibers, smoke, and oil on the vanes of the indoor unit, keeping it clean all year long. Dual Barrier Fusion's shielding power is fused directly into the material of the horizontal and vertical vanes during manufacturing to maintain effectiveness and longevity of the components, and to promote vane cleanliness and reduce odors.
- Dual Vane: Dual-Vane feature allows for airflow direction to be set independently using two vanes, which can then deliver airflow across wide areas of a room, levels of a zone, or to two people in different locations at the same time.
- Econo Cool: Econo Cool temporarily and automatically adjusts the airflow based on heat exchanger temperature. The set temperature is increased slightly, which saves energy, while maintaining comfort.
- Multiple control options including: Back-lit screen hand-held Remote Controller (provided with unit), comfort app, third-party interfaces and both wired and wireless controllers
- Multiple fan speed options: Low, Medium, High, Powerful, Auto
- Powerful Mode: Temporarily drops or raises the set point and fan speed in order to quickly bring the room to the desired temperature.
- Quiet operation: Outdoor units are as quiet as a typical conversation, and most indoor units are whisper quiet.
- Slim Design: Slim wall-mounted indoor units provide zone comfort control
- Smart Dry +: The Smart Dry+ mode intelligently provides precise humidity control with minimal over-cooling of the space.
- Triple Action Filtration: Standard Microparticle and Electrostatic Enzyme Filters, along with an optional Carbon-based Deodorizing Filter. It effectively removes non-living particulate matter like dust and smoke, utilizes nanotechnology to absorb and neutralize odors, and employs static electricity to attract and filter charged airborne particles.
- Wi-Fi enabled units pair with the Comfort app for complete control over temperature, fan speeds, modes, schedules, and more.

Specifications			System
Unit Type			MSZ-FX18NL
Cooling Capacity (Nominal) ^{1,3}	Cooling Capacity (Nominal)	Btu/h	17,200
Heating Capacity (Nominal) ^{2,3}	Heating Capacity (Nominal)	Btu/h	17,000
Electrical	Voltage, Phase, Frequency	V AC / V AC, ø, Hz	208 / 230, 1, 60
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	MCA	A	1

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Nominal capacity only. Actual capacity output varies based on the system-specific configuration.

SPECIFICATIONS: MSZ-FX18NL


Specifications			System
Unit Type			MSZ-FX18NL
Indoor Unit	Fan Motor Type		DC Motor
	Fan Motor Output	W	40
	Airflow Rate at Cooling, Dry	CFM	272, 339, 392, 456, 593
	Airflow Rate at Cooling, Wet	CFM	231, 288, 333, 387, 504
	Airflow Rate at Heating, Dry	CFM	272, 311, 378, 456, 614
	Sound Pressure Level [Cooling]	dB (A)	27, 31, 35, 39, 45
	Sound Pressure Level [Heating]	dB (A)	26, 29, 34, 39, 47
	DBC on HEX (Yes or No)		Yes
	External Finish Color		Munsell 1.0Y 9.2/0.2
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	39 -9/32 x 9-3/4 x 12 [998 x 247 x 305]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	43 -5/16 x 12-3/4 x 15-3/4 [1,100 x 330 x 400]
	Unit Weight	lbs [kg]	31.40 [14.20]
Refrigerant	Package Weight	lbs [kg]	36.40 [16.50]
	Type		R454B
Piping	Liquid Pipe Size O.D.	inch [mm]	1/4 [6.35]
	Gas Pipe Size O.D.	inch [mm]	1/2 [12.70]
NOTES			
¹ Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)			
² Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)			
³ Nominal capacity only. Actual capacity output varies based on the system-specific configuration.			

INDOOR UNIT ACCESSORIES: MSZ-FX18NL

Lineset	100 x 1/4 x 100 1/2 Lineset Twin-Tube Insulation	MLS141212T-100
	15 x 1/4 x 15 1/2 Lineset Twin-Tube Insulation	MLS141212T-15
	30 x 1/4 x 30 1/2 Lineset Twin-Tube Insulation	MLS141212T-30
	50 x 1/4 x 50 1/2 Lineset Twin-Tube Insulation	MLS141212T-50
	65 x 1/4 x 65 1/2 Lineset Twin-Tube Insulation	MLS141212T-65
Remote Sensor	Remote Temperature Sensor for MFZ MLZ and MSZ models	M21EAA307
	Wireless temperature and humidity sensor for the Comfort app	PAC-USWHS003-TH-1
Control Interface	Airzone Wired Blueface Controller Black	AZZBSBLUEZEROCN
	Airzone Wired Blueface Controller White	AZZBSBLUEZEROCB
	Airzone Wireless Lite Controller Black	AZZBSLITERN
	Airzone Wireless Lite Controller White	AZZBSLITERB
	Airzone Wireless Think Controller Black	AZZBSTHINKRN
	Airzone Wireless Think Controller White	AZZBSTHINKRB
	IT Extender for kumo station	PAC-WHS01IE-E
	kumo station for the Comfort app	PAC-WHS01HC-E
	M-Net I/O Control Interface for M-Series ²	MAC-334IF-E
	Procon BACnet and Modbus Interface	PAC-UKPRC001-CN-1
	Thermostat Interface for 3rd Party Thermostats	PAC-US445CN-1
Condensate	Wireless Interface Adapter for the Comfort app	PAC-USWHS002-WF-2
	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	X87-721
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	X87-711
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	X87-835
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	X86-003
	Blue Diamond Sensor Extension Cable 15 Ft	C13-103
	Drain Pan Level SensorControl	SS610E
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	COMBI
	Refco Condensate Pump 100-240 VAC	GOBI-II
	REFCO PUMP 100-240 VAC 506O HZ	X86-011
Wired Remote Controller	Sauermann Condensate Pump	SI30-230
	Deluxe Wired MA Remote Controller	PAR-42MAAUB
	Simple Direct Wired Remote Controller	PAC-SDW01RC-1
	Simple MA Remote Controller ¹	PAC-YT53CRAU-J
Power Supplies and Auxiliary Components	Touch MA Wired Remote Controller ¹	PAR-CT01MAU-SB
	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	CN24RELAY-KIT-CM3
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	TAZ-MS303W
Filter	Electro Static Anti-allergy Enzyme Filter	MAC-2330FT-E
	Microparticle Filter	MAC-EMF515FT-E
	Platinum Deodorizing Filter	MAC-3010FT-E
Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	RCMKP1CB
	RedLINK Wireless Remote Controller	MHK2
Drain Hose	Flexible Mini-Split Drain Hose	DRX-16
NOTES ² Allows IDU Connection to MA Controller: Deluxe MA Remote Controller Simple MA Controller Touch MA Controller ¹ Requires MAC-334IF-E Interface to connect MA controller ¹ Requires MAC-334IF-E Interface to connect MA controller ¹ Requires MAC-334IF-E Interface to connect MA controller ¹ Requires MAC-334IF-E Interface to connect MA controller		

INDOOR UNIT DIMENSIONS: MSZ-FX18NL

MSZ-FX06NL-U1
MSZ-FX09NL-U1
MSZ-FX12NL-U1
MSZ-FX15NL-U1
MSZ-FX18NL-U1
MSZ-FX24NL-U1

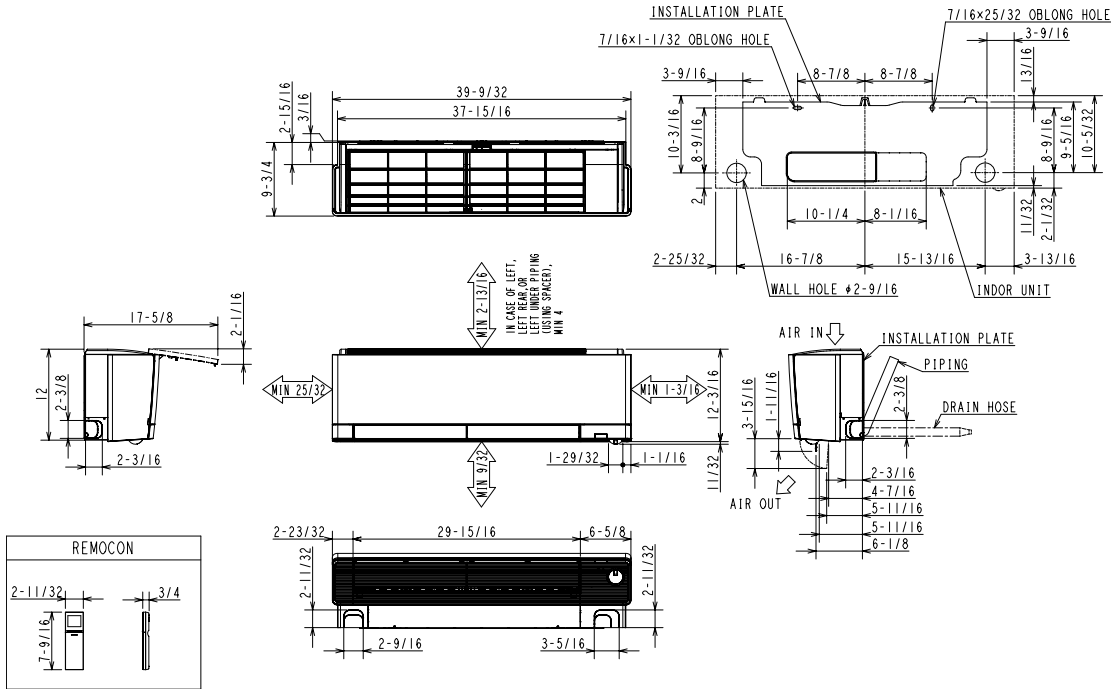

MSZ-FX06/09/12NL

PIPING	INSULATION	ø1-9/16 O.D
	LIQUID LINE	ø1/4 - 19-11/16 (FLARED CONNECTION ø1/4)
	GAS LINE	ø3/8 - 17-3/4 (FLARED CONNECTION ø3/8)
DRAIN HOSE		INSULATION ø1-5/32 CONNECTED PART ø5/8 O.D

MSZ-FX24NL

PIPING	INSULATION	ø1-9/16 O.D
	LIQUID LINE	ø1/4 - 19-11/16 (FLARED CONNECTION ø1/4)
	GAS LINE	ø15/32 - 17-3/4 (FLARED CONNECTION ø5/8)
DRAIN HOSE		INSULATION ø1-5/32 CONNECTED PART ø5/8 O.D

MSZ-FX15/18NL

PIPING	INSULATION	ø1-9/16 O.D
	LIQUID LINE	ø1/4 - 19-11/16 (FLARED CONNECTION ø1/4)
	GAS LINE	ø3/8 - 17-3/4 (FLARED CONNECTION ø1/2)
DRAIN HOSE		INSULATION ø1-5/32 CONNECTED PART ø5/8 O.D

*The diameter of the gas line piping is ø3/8 in one spot.