

PEAD-AA30NL & SUZ-AA30NL
30,000 BTU/H HORIZONTAL-DUCTED INDOOR UNIT
27,000 BTU/H HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



INDOOR Unit ... PEAD-AA30NL
OUTDOOR Unit ... SUZ-AA30NL

INDOOR UNIT FEATURES

- Wi-Fi Optional: A Wireless Interface Adapter can be ordered as an accessory for field installation.
- Four Speed Fan: Adjust the fan between four speed settings to optimal comfort.
- Auto Changeover: The unit will automatically switch between heating and cooling modes to maintain your desired temperature.
- Condensate Lift Mechanism: Reduces the need for an additional pump to remove condensate. Units with a condensate lift mechanism also include an overflow safety switch.
- Light Commercial: Light commercial applications include small offices, restaurants, and retail.

OUTDOOR UNIT FEATURES

- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Seacoast Protection: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.

SPECIFICATIONS: PEAD-AA30NL & SUZ-AA30NL

Cooling at 95F ¹	Maximum Capacity	Btu/h	27000
	Rated Capacity	Btu/h	27000
	Minimum Capacity	Btu/h	9500
	Maximum Power Input	W	2270
	Rated Power Input	W	2270
	Moisture Removal	Pints/h	4.40
	Sensible Heat Factor		0.82
	Power Factor [208V / 230V]	%	95 / 95
Heating at 47F ²	Maximum Capacity	Btu/h	31400
	Rated Capacity	Btu/h	30000
	Minimum Capacity	Btu/h	8400
	Maximum Power Input	W	2830
	Rated Power Input	W	2664
	Power Factor [208V / 230V]	%	97 / 97
Heating at 17F ³	Maximum Capacity	Btu/h	18700
	Rated Capacity	Btu/h	18700
	Maximum Power Input	W	1980
	Rated Power Input	W	1980
	Maximum Capacity	Btu/h	17000
Heating at 5F ⁵	Maximum Power Input	W	1660
Heating at -4F ⁶	Maximum Capacity	Btu/h	13700
Efficiency	SEER2		20.30
	EER2 ¹		11.70
	HSPF2 [IV]		9.50
	COP at 47°F ²		3.30
	COP at 17°F at Maximum Capacity ³		2.70
	COP at 5°F at Maximum Capacity ⁵		3
	COP at -4°F at Maximum Capacity ⁶		2.47
	ENERGY STAR® Certified		Yes
Electrical	Voltage, Phase, Frequency	V AC / V AC , Ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	30
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
Indoor Unit	MCA	A	2.25
	Fan Motor Output	W	121
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	618 , 671 , 742 , 883
	Airflow Rate at Heating, Dry	CFM	618 , 671 , 742 , 883
	Sound Pressure Level [Cooling]	dB (A)	30 , 32 , 34 , 38
	Sound Pressure Level [Heating]	dB (A)	30 , 32 , 34 , 38
	External Static Pressure	in.WG	0.14 , 0.20 , 0.28 , 0.40 , 0.60
	Drain Pipe Size O.D.	inch [mm]	1-1/4 [32]
	Condensate Lift Mechanism, Max Height	inch [mm]	27-9/16 [700]
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	43-5/16 x 28-7/8 x 9-7/8 [1100 x 732 x 250]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	53-15/16 x 35-7/16 x 13 [1370 x 900 x 330]
	Unit Weight	lbs [kg]	67 [30]
	Package Weight	lbs [kg]	79 [36]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50
Outdoor Unit	MCA	A	25
	MOCP	A	41
	Fan Motor Output	W	50

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

³Nominal capacity only. Actual capacity output varies based on the system specific configuration

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB

*Use 1/4 liquid line for SUZ-AA24/30/36NL, adapter is included with the outdoor unit

SPECIFICATIONS: PEAD-AA30NL & SUZ-AA30NL

Outdoor Unit	Airflow Rate Cooling	CFM	1974
	Airflow Rate Heating	CFM	1949
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	55
	Sound Pressure Level, Heating ²	dB (A)	55
	Compressor Type		Twin Rotary
	Compressor Model		SRB220FQYMT
	Compressor Oil [Type // Charge]	// oz	RM68EH // 15.6
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Optional
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33-1/16 x 13 x 34-5/8 [840 x 330 x 880]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	38-5/8 x 16-9/16 x 39 [980 x 420 x 990]
	Unit Weight	lbs [kg]	117 [53]
	Package Weight	lbs [kg]	135 [61]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 14
	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	-1 / 3
	Heating Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	75 , 65 / -4 , -5
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-14 / -4
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	3 , 4
	Maximum Pre-Charged Piping Length	ft [m]	25 [7.60]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.22
Piping	Liquid Pipe Size O.D. [Flared]	inch [mm]	1/4 [6.35]
	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Maximum Piping Length	ft [m]	100 [30]
	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		10

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

³Nominal capacity only. Actual capacity output varies based on the system specific configuration

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB

*Use 1/4 liquid line for SUZ-AA24/30/36NL, adapter is included with the outdoor unit

INDOOR UNIT ACCESSORIES: PEAD-AA30NL


Condensate	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐ X88-721
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐ COMBI
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	☐ X87-711
	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐ X87-835
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐ SI30-230
Control Interface	Airzone Wireless Lite Controller White	☐ AZZBSLITERB
	Procon BACnet® and Modbus® Interface	☐ PAC-UKPRC001-CN-1
	Airzone Wireless Think Controller White	☐ AZZBSTHINKRB
	Airzone Wireless Think Controller Black	☐ AZZBSTHINKRN
	Airzone Wired Blueface Controller Black	☐ AZZBSBLUEZEROCN
	Airzone Wireless Lite Controller Black	☐ AZZBSLITERN
	kumo station® for Comfort app	☐ PAC-WHS01HC-E
	Operation and Error Status Output Adapter	☐ PAC-SF40RM-E
	Airzone Wired Blueface Controller White	☐ AZZBSBLUEZEROCB
	Wireless Interface 2 for Comfrot app	☐ PAC-USWHS002-WF-2
	IT Extender	☐ PAC-WHS01IE-E
	Thermostat Interface for 3rd Party Thermostats	☐ PAC-US445CN-1
Control Wire	202PR 1PR shielded 1PR plenum wire for Airzone 100 ft reel	☐ CW2042S2-100
	202PR shielded 1PR plenum wire for Airzone 500 ft reel	☐ CW2042S2-500
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	☐ TAZ-MS303W
Filter Box	Filter Box with 2" thick pleated MERV 13 Filters	☐ FBM2-3-A
Lineset	1/4 x 5/8 Lineset Twin-Tube Insulation - 65 feet	☐ MLS145812T-65
	3/8 x 5/8 Lineset Twin-Tube Insulation - 50 feet	☐ MPLS385812T-50
	1/4 x 5/8 Lineset Twin-Tube Insulation - 50 feet	☐ MLS145812T-50
	3/8 x 5/8 Lineset Twin-Tube Insulation - 65 feet	☐ MPLS385812T-65
	3/8 x 5/8 Lineset Twin-Tube Insulation - 15 feet	☐ MPLS385812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 100 feet	☐ MPLS385812T-100
	1/4 x 5/8 Lineset Twin-Tube Insulation - 15 feet	☐ MLS145812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 30 feet	☐ MPLS385812T-30
	1/4 x 5/8 Lineset Twin-Tube Insulation - 30 feet	☐ MLS145812T-30
Remote Sensor	1/4 x 5/8 Lineset Twin-Tube Insulation - 100 feet	☐ MLS145812T-100
	Wall Mount Remote Temperature Sensor	☐ PAC-SE41TS-E
	Wireless temperature and humidity sensor for Comfort app	☐ PAC-USWHS003-TH-1
Terminal Signal Adapter	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐ PAC-USSEN002-FM-1
	Connector and wire for On/Off and Fan command using CN32	☐ PAC-715AD
	Backup Heat Relay Kit	☐ CN24RELAY-KIT-CM3
Wired Remote Controller	Connector and wire for On/Off and Error status using CN51 and CN52	☐ PAC-725AD
	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
	Simple MA Remote Controller	☐ PAC-YT53CRAU-J
	Deluxe Wired MA Remote Controller	☐ PAR-42MAAUB
Wireless Remote Controller	Touch MA Remote Controller	☐ PAR-CT01MAU-SB
	Universal Wireless Receiver for PAR-FL32MA-E	☐ PAR-FA32MA-W
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB
	Wireless MA Handheld Remote Controller (requires PAR-FA32MA-E)	☐ PAR-FL32MA-E
	Wireless Remote Controller	☐ PAR-SL101A-E
	Wireless RedLINK™ Remote Controller	☐ MHK2
Notes ¹ Requires MAC-334IF-E Interface to connect MA controller ¹ Unable to use with Wireless Handheld Remote Controller		

OUTDOOR UNIT ACCESSORIES: SUZ-AA30NL

Air Outlet Guide	Air Outlet Guide	☐	MAC-890SG-E
Control/Service Tool	USB Conversion Cable for PAC-USCMS-MN-1	☐	M21EC1397
	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
Drain Socket	Drain Socket	☐	MAC-871DS
Hail Guards	Hail Guard	☐	HG-A7
Mini-Split Wire	16 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW164-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	16 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S164-50
	16 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW164-50
Mounting Pad	16 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S164-250
	Condensing Unit Mounting Pad 16 x 36 x 3	☐	ULTRILITE1
Optional Defrost Heater	Base Heater	☐	MAC-660BH-U
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-3
Stand	Outdoor Unit Stand 12 High	☐	QSMS1201M
	24 Single Fan Stand	☐	QSMS2401M
	18 Single Fan Stand	☐	QSMS1801M
	Condenser Wall Bracket	☐	QSWB2000M-1
	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
Notes			

INDOOR UNIT DIMENSIONS: PEAD-AA30NL

- Notes 1. Use an M10 screw for the suspension bolt (old supply).
 2. Keep the service space for maintenance at the bottom.
 3. This drawing is for PEAD-AA09 12 15 18 24 30NL models which have 2 fans.
 PEAD-AA36 42NL models have 3 fans.
 4. If the inlet duct is used, remove the air filter (supplied with the unit), then install the filter (old supply) at the suction side.
 5. Heat air to 0°C (32°F) or higher when taking fresh air with a fresh air intake.

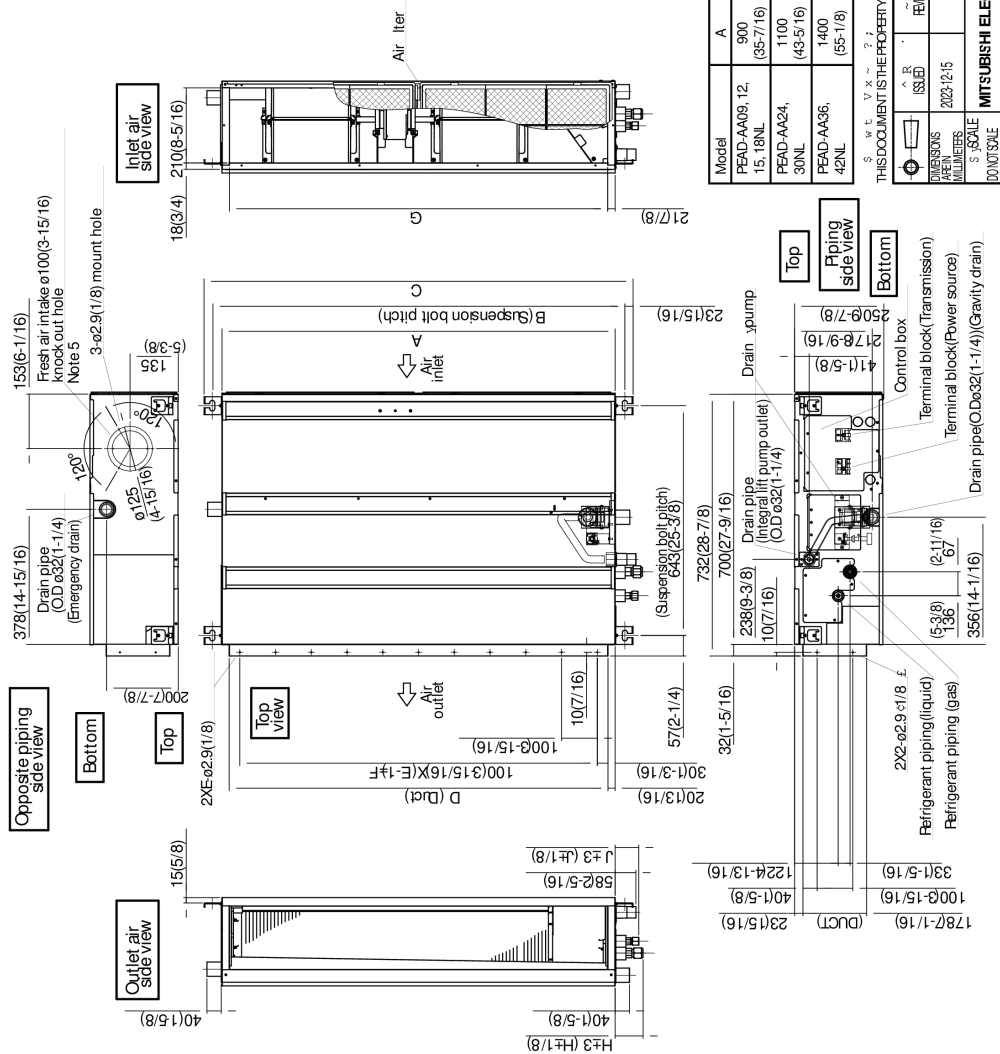

Model	J	Gas pipe	Liquid pipe
PEAD-AA09 NL	62 (2-1/2)	ø9.52 (3/8)	ø6.35 (1/4)
PEAD-AA12, 15, 18NL	66	ø12.7 (1/2)	ø9.52 (3/8)
PEAD-AA24, 30, 36, 42NL	66	ø15.88 (5/8)	ø9.52 (3/8)


Model	A	B	C	D	E	F	G	H
PEAD-AA09, 12, 15, 18NL	900 (35-7/16)	954 (37-9/16)	1000 (39-3/8)	860 (33-7/8)	9	800 (31-1/2)	888 (33-13/16)	72 (2-7/8)
PEAD-AA24, 30NL	1100 (43-5/16)	1154 (45-7/16)	1200 (47-1/4)	1060 (41-3/4)	11	1000 (39-3/8)	1058 (41-11/16)	78 (3-1/8)
PEAD-AA36, 42NL	1400 (55-1/8)	1454 (57-1/4)	1500 (59-1/16)	1360 (53-9/16)	14	1300 (51-3/16)	1358 (53-1/2)	

THIS DOCUMENT IS THE PROPERTY OF MITSUBISHI ELECTRIC CORPORATION.

REVISION	DATE	DESCRIPTION
1	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
2	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
3	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
4	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
5	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
6	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
7	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
8	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
9	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
10	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
11	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
12	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
13	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
14	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
15	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
16	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
17	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
18	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
19	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
20	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
21	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
22	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
23	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
24	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
25	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
26	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
27	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
28	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
29	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
30	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
31	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
32	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
33	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
34	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
35	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
36	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
37	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
38	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
39	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
40	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
41	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
42	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
43	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
44	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
45	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
46	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
47	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
48	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
49	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
50	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
51	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
52	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
53	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
54	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
55	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
56	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
57	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
58	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
59	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
60	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
61	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
62	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
63	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
64	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
65	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
66	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
67	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
68	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
69	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
70	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
71	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
72	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
73	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
74	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
75	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
76	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
77	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
78	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
79	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
80	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
81	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
82	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
83	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
84	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
85	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
86	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
87	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
88	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
89	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
90	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
91	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
92	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
93	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
94	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
95	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
96	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
97	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
98	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
99	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL
100	2023-12-15	EXTERNAL DIMENSION PEAD-AA09 12 15 18 24 30 36 42NL

OUTDOOR UNIT DIMENSIONS: SUZ-AA30NL

REQUIRED SPACE

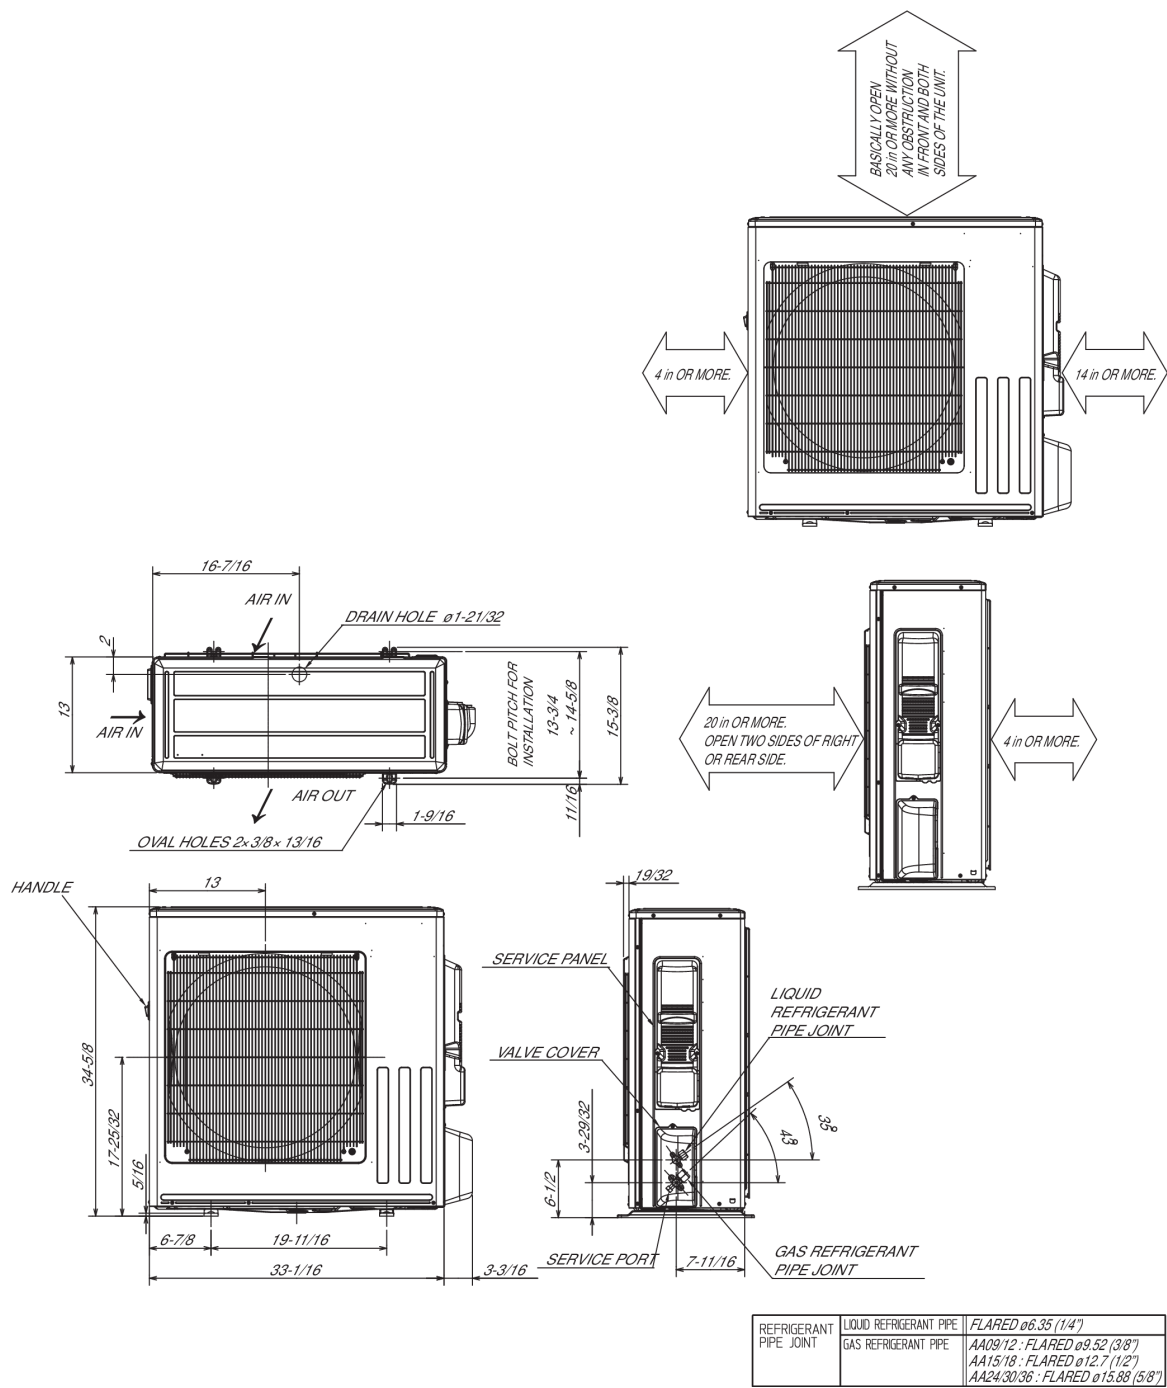

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-08_PROPIN

