

PEFY-L08NMAU-A 8,000 BTU/H HORIZONTAL-DUCTED INDOOR UNIT



Job Name:

System Reference:

Date:



GENERAL FEATURES

- 9-7/8" (250mm) high for low ceiling heights
- Auto fan mode
- Built-in condensate lift; lifts to 27-9/16" (700 mm)
- Dual set point functionality
- Ducted fan coil supporting multiple configurations for flexible installation
- Five-Stage Static Pressure Settings: Five-stage external static pressure settings provide flexibility for duct extension, branching, and air outlet configuration and are adjustable to meet different application conditions. The settings range to a maximum of 0.60 in.WG (150 Pa).
- Multiple fan speed settings

Specifications			System
Unit Type			PEFY-L08NMAU-A
Cooling Capacity (Nominal) ^{1,3}	Cooling Capacity (Nominal)	Btu/h	8,000
Heating Capacity (Nominal) ^{2,3}	Heating Capacity (Nominal)	Btu/h	9,000
Electrical	Voltage, Phase, Frequency	V AC / V AC, ø, Hz	208 / 230, 1, 60
	Power Consumption Cooling	kW	0.042
	Power Consumption Heating	kW	0.04
	Current Cooling	A	0.42/0.38
	Current Heating	A	0.42/0.38
	MCA	A	1.75
	MOCP	A	15
Indoor Unit	Fan Motor Type		DC Motor
	Fan Motor Output	W	85
	Airflow Rate at Cooling, Dry	CFM	212, 265, 300
	Airflow Rate at Heating, Dry	CFM	212, 265, 300
	Sound Pressure Level [Cooling]	dB (A)	24, 28, 30
	Sound Pressure Level [Heating]	dB (A)	24, 28, 30
	External Static Pressure	in.WG	0.14, 0.20, 0.28, 0.40, 0.60
	DBC on HEX (Yes or No)		No
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	27-9/16 x 28-7/8 x 9-7/8 [700 x 732 x 250]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	38-1/4 x 35-7/16 x 13 [970 x 900 x 330]
Unit Weight	lbs [kg]	48 [21.50]	
Package Weight	lbs [kg]	57 [26]	
Refrigerant	Type		R454B
Piping	Liquid Pipe Size O.D.	inch [mm]	1/4 [6.35]
	Gas Pipe Size O.D.	inch [mm]	1/2 [12.72]
Drain Pipe	Drain Pipe Size O.D.	inch [mm]	1-1/4 [32]

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Nominal capacity only. Actual capacity output varies based on the system-specific configuration.

INDOOR UNIT ACCESSORIES: PEFY-L08NMAU-A

Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	RCMKP1CB
	RedLINK Wireless Remote Controller	MHK2
	Universal Wireless MA Handheld Remote Controller	PAR-FL32MA-E
	Universal Wireless Receiver for PAR-FL32MA-E	PAR-FA32MA-W
Control Interface	3-Pin Wiring Harness	PAC-715AD
	5-Pin Wiring Harness	PAC-725AD
	Airzone Wired Blueface Controller Black	AZZBSBLUEZEROCN
	Airzone Wired Blueface Controller White	AZZBSBLUEZEROCB
	Airzone Wireless Lite Controller Black	AZZBSLITERN
	Airzone Wireless Lite Controller White	AZZBSLITERB
	Airzone Wireless Think Controller Black	AZZBSTHINKRN
	Airzone Wireless Think Controller White	AZZBSTHINKRB
	IT Extender for kumo station	PAC-WHS01IE-E
	kumo station for the Comfort app	PAC-WHS01HC-E
	Procon BACnet and Modbus Interface	PAC-UKPRC001-CN-1
	Thermostat Interface for 3rd Party Thermostats	PAC-US445CN-1
	Wireless Interface Adapter for the Comfort app	PAC-USWHS002-WF-2
Condensate	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	X87-721
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	X87-711
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	X87-835
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	X86-003
	Blue Diamond MultiTank collection tank for use with multiple pumps	C21-014
	Blue Diamond Sensor Extension Cable 15 Ft	C13-103
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	COMBI
	Sauermann Condensate Pump	SI30-230
Lineset	100 x 1/4 x 100 1/2 Lineset Twin-Tube Insulation	MLS141212T-100
	15 x 1/4 x 15 1/2 Lineset Twin-Tube Insulation	MLS141212T-15
	30 x 1/4 x 30 1/2 Lineset Twin-Tube Insulation	MLS141212T-30
	50 x 1/4 x 50 1/2 Lineset Twin-Tube Insulation	MLS141212T-50
	65 x 1/4 x 65 1/2 Lineset Twin-Tube Insulation	MLS141212T-65
Control Wire	202PR 1PR shielded 1PR plenum wire for Airzone 100 ft reel	CW2042S2-100
	202PR shielded 1PR plenum wire for Airzone 500 ft reel	CW2042S2-500
Terminal Signal Adapter	CN105 Wire Harness Adapter for CN51 & CN100	PAC-IT51AD-E
Wired Remote Controller	Deluxe MA Wired Remote Controller ¹	PAR-42MAAUB
	Deluxe Wired MA Remote Controller	PAR-40MAAU
	Simple Direct Wired Remote Controller	PAC-SDW01RC-1
	Simple MA Remote Controller ¹	PAC-YT53CRAU-J
	Smart ME Remote Controller	PAR-U01MEDU-K
	Touch MA Wired Remote Controller ¹	PAR-CT01MAU-SB
Remote Sensor	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	PAC-USSEN002-FM-1
	Wall Mount Remote Temperature Sensor	PAC-SE41TS-E
	Wireless temperature and humidity sensor for the Comfort app	PAC-USWHS003-TH-1
Filter	Filter Box with MERV 13 Filter	FBM2-1-A
Power Supplies and Auxiliary Components	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	CN24RELAY-KIT-CM3
NOTES		

INDOOR UNIT DIMENSIONS: PEFY-L08NMAU-A

- Notes 1. Use an M10 screw for the suspension bolt (field supply).
 2. Keep the service space for maintenance at the bottom.
 3. If the inlet duct is used, remove the air filter (supplied with the unit), then install the filter (field supply) at the suction side.
 4. Heat air to 0.6 (32°) of higher when taking fresh air with a fresh air intake.
 5. As representative drawing.
 PEFY-L18*24*27NMAU-A is shown in this drawing.
 Refer to below information about the number of fan.


Model	Number of fans
PEFY-L06,08,12NMAU-A	1
PEFY-L15,18,24,27NMAU-A	2
PEFY-L30,36,48,54NMAU-A	3

Model	① Gas pipe	② Liquid pipe	Unitmm(in.)
PEFY-L06,08,12,15,18NMAU-A	φ12.7	φ6.35	(1/2) (1/4)
PEFY-L24,27,30,36,48,54NMAU-A	φ15.88	φ9.52	(5/8) (3/8)

Model	A	B	C	D	E	F	G	Unitmm(in.)
PEFY-L06,08,12NMAU-A	700	754	800	660	660	7	600	658
	(27-9/16)	(29-1/16)	(31-1/2)	(26)	(26)		(23-5/8)	(25-15/16)
PEFY-L15NMAU-A	900	954	1000	860	860	9	800	858
	(35-7/16)	(37-9/16)	(39-3/8)	(33-7/8)	(33-7/8)		(31-1/2)	(33-13/16)
PEFY-L18,24,27NMAU-A	1100	1154	1200	1060	1060	11	1000	1058
	(43-5/16)	(45-7/16)	(47-1/4)	(41-3/4)	(41-3/4)		(39-3/8)	(41-11/16)
PEFY-L30,36,48NMAU-A	1400	1454	1500	1360	1360	14	1300	1358
	(55-1/8)	(57-1/4)	(59-1/16)	(53-9/16)	(53-9/16)		(51-3/16)	(53-1/2)
PEFY-L54NMAU-A	1600	1654	1700	1560	1560	16	1500	1558
	(63)	(65-1/8)	(66-15/16)	(61-7/16)	(61-7/16)		(59-1/16)	(61-3/8)

本図面の所有権は三菱電機株式会社にある。
 THIS DOCUMENT IS THE PROPERTY OF MITSUBISHI ELECTRIC CORPORATION.

DIMENSIONS ARE IN METERS 寸法 スケール DRAWING SCALE	作成日付 ISSUED	改定日付 REVISED	FIG. NO.
	2023-12-15		EXTERNAL DIMENSION PEFY-L06*08*12*15*18*24*27*30*36*48*54NMAU-A
MITSUBISHI ELECTRIC CORP. RPT-N W			REV. 1/2

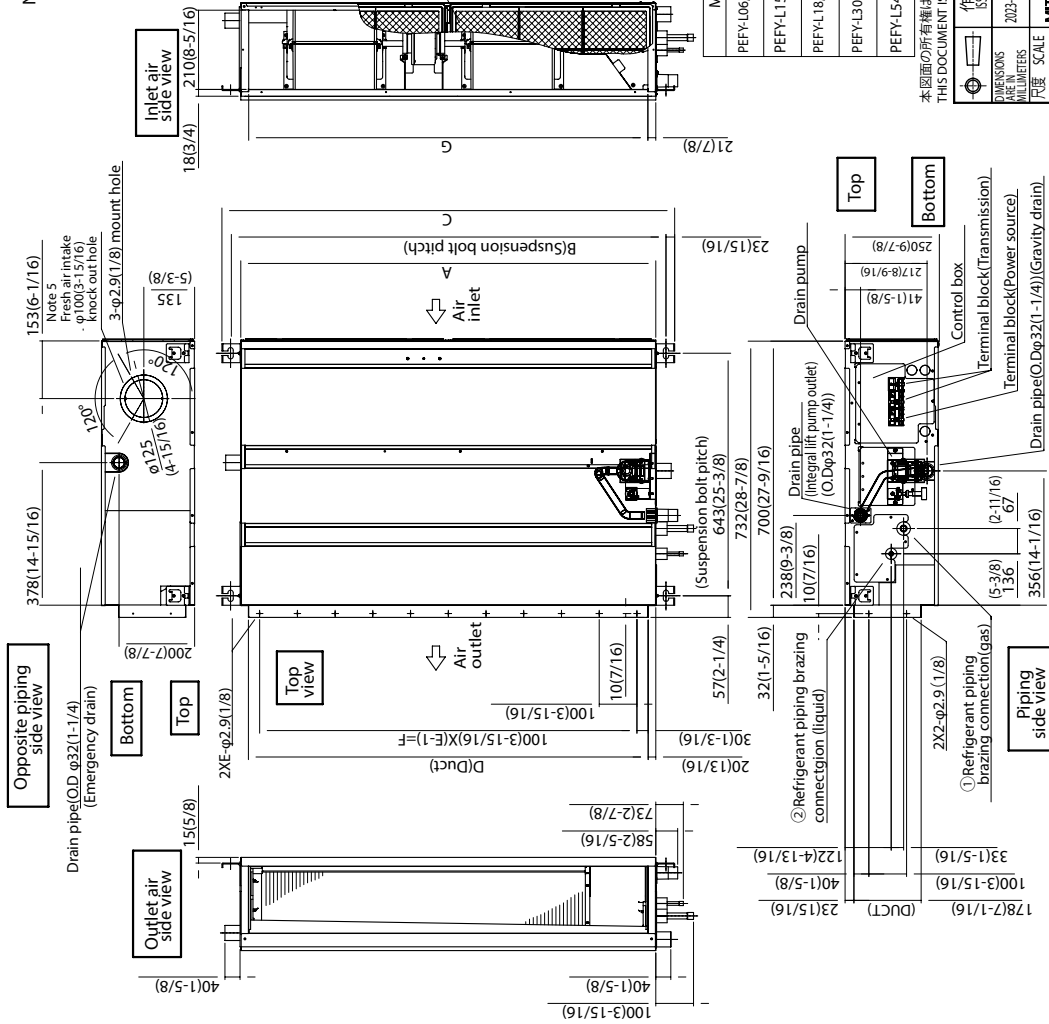

1340 Satellite Boulevard Suwanee, GA 30024
 Toll Free: 800-433-4822 <https://mitsubishicomfort.com>

