



Submittal Data Sheet

R-32 --- 2 Ton, Heatpump, Ductless, ODU Daikin OTERRA
RXF24AXVJU

FEATURES

- Inverter Technology
- Swing Compressor
- Auto Restart (after power failure)
- Self Diagnosis
- Anti-Corrosion Treatment of Outdoor Heat Exchanger
- Quiet Operations

BENEFITS

- Energy Savings
- Worry Free Operations
- Long life of equipment
- R-32 Easy, Proven, Efficient, Available

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

R-32 --- 2 Ton, Heatpump, Ductless, ODU Daikin OTERRA
RXF24AXVJU

EFFICIENCY:	
COOLING:	HEATING:
SEER	HSPF
EER	COP

PERFORMANCE:			
COOLING (Btu/Hr):		HEATING (Btu/Hr):	
Rated:(Min/Max):	22,400 (7,000 / 26,400)	47° Rated:(Min/Max):	23,600 (/)
Sensible AHRI:		17° Rated:	Add MSS
Moisture Removal (Gal/Hr):	0.9	5° Max:	Add MSS
Standard Operating Range:	50°F - 122°F	Operating Range:	5°F - 64°F
Extended Operating Range:	°F - °F	47° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	17° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

ELECTRICAL			PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1		Gas Connection (in):	5/8
System MCA:	16.3		Liquid Connection (in):	1/4
System MFA:	20.0		Drain Connection (in):	5/8
Compressor RLA:			Max. Interunit Piping Length (ft):	98.5
Outdoor fan motor FLA:	1.3		Max. Interunit Height Difference (ft):	66
Outdoor fan motor W:	55.0		Refrigerant Pre-Charged Pipe Length (ft):	33
Indoor fan motor FLA:			Additional Charge of Refrigerant (oz/ft):	0.18
Indoor fan motor W:	55.0			
MCA: Min.circuit amps	MFA: Max.fuse amps	RLA: Rated load amps		
			FLA: Full load amps	W: Rated output watts


Submittal Data Sheet

R-32 --- 2 Ton, Heatpump, Ductless, ODU Daikin OTERRA
RXF24AXVJU

INDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,879	Med:	
Low:		SuperLow:	
Sound Pressure (H) (dBA):	55	Sound Pressure (H) (dBA):	55
Dimensions (HxWxD) (in):	27-13/32 x 36-5/8 x 13-13/16	Net Weight (lb):	101

DIMENSIONAL DRAWING - INDOOR UNIT

Model : RKF18/24A, RXF18/24A

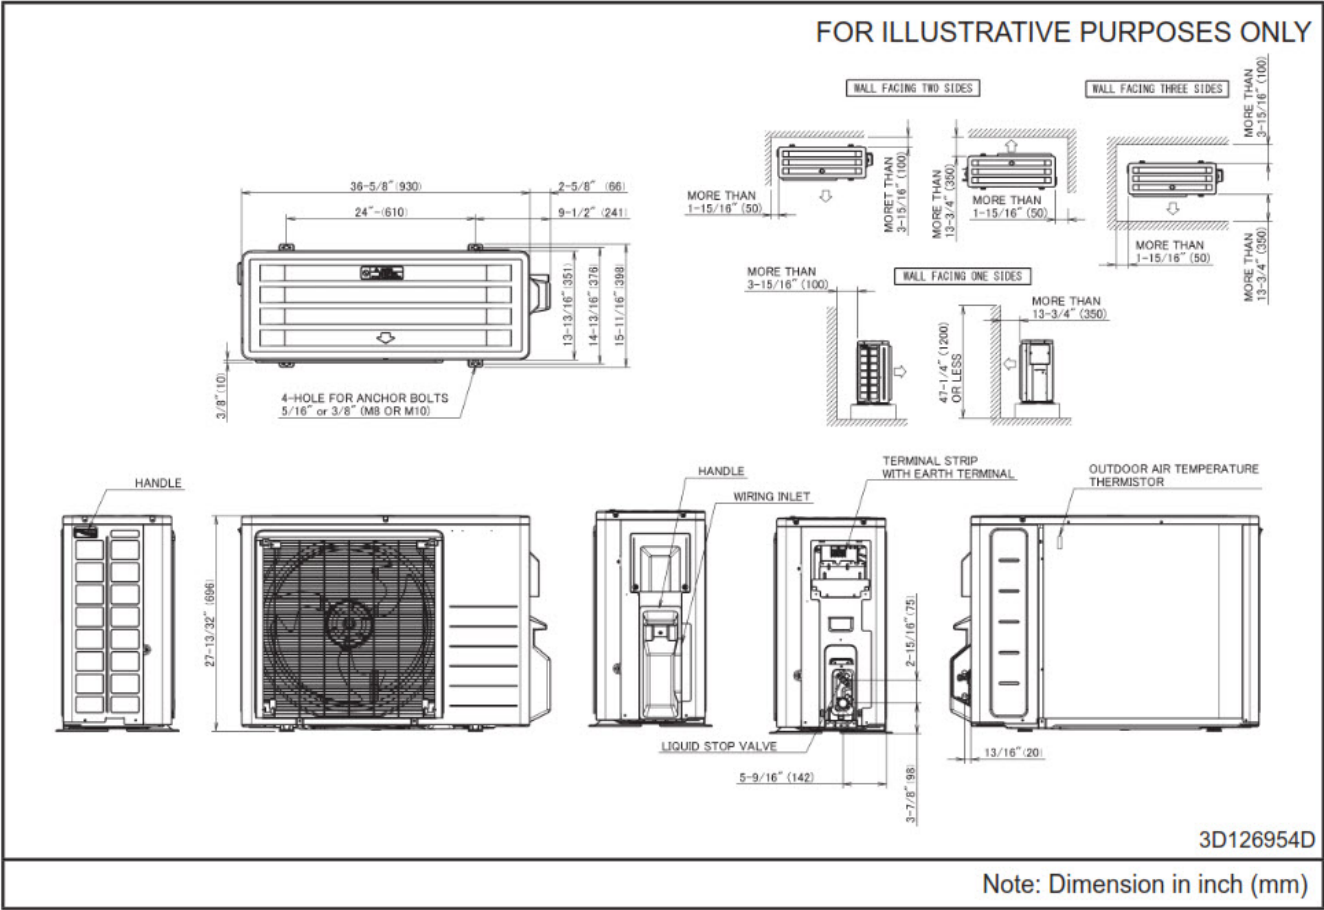


Submittal Data Sheet

R-32 --- 2 Ton, Heatpump, Ductless, ODU Daikin OTERRA
RXF24AXVJU

OUTDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,879	High:	1,833
SuperLow:		SuperLow:	
Compressor Stage:	Inverter	Refrigerant Type:	R-32
Factory Charge (Lbs):	3.31	Refrigerant Oil:	PVE (FVC50K)
Sound Pressure Level (dBA):	55		
Dimensions (HxWxD) (in):	27-13/32 x 36-5/8 x 13-13/16	Net Weight (lb):	101

DIMENSIONAL DRAWING - OUTDOOR UNIT

Model : RKF18/24A, RXF18/24A

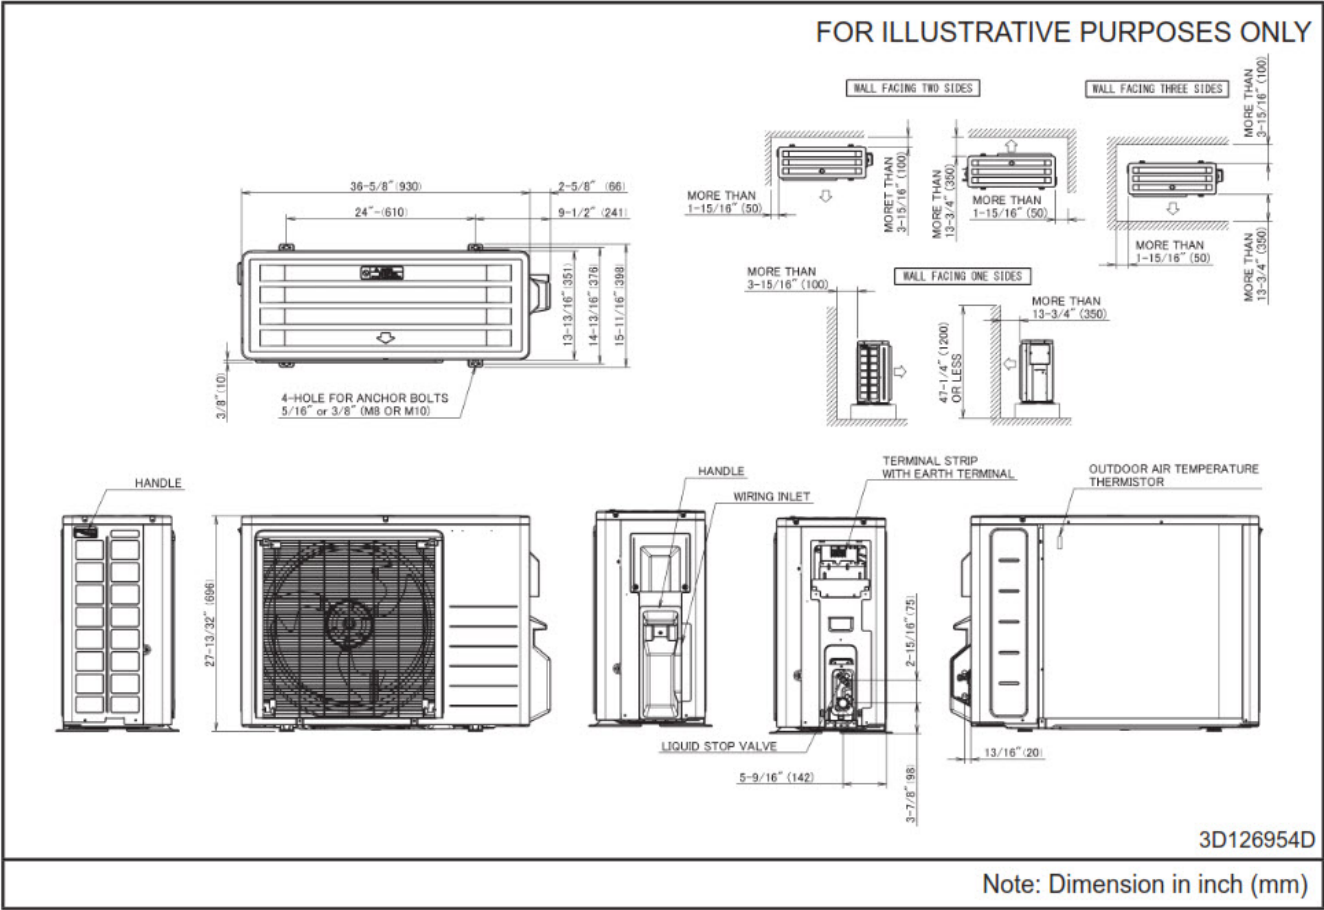



Submittal Data Sheet

R-32 --- 2 Ton, Heatpump, Ductless, ODU Daikin OTERRA
RXF24AXVJU

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH063A4EA	Bml LRg Drain Pan Heater Rev A	No
KPW063B4E	Air Adjustment Grille	No