



**Submittal Data Sheet**

Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Ductless ODU  
RXM24WVJU9

**FEATURES**

- Inverter Technology delivers precise temperature control and superior energy efficiency

**BENEFITS**

- 12 year limited parts and compressor warranty

**INDOOR UNIT**



**OUTDOOR UNIT**





### Submittal Data Sheet

Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Ductless ODU  
RXM24WVJU9

| EFFICIENCY: |          |
|-------------|----------|
| COOLING:    | HEATING: |
| SEER        | HSPF     |
| EER         | COP      |

| PERFORMANCE:               |                                                           |                               |                                                           |
|----------------------------|-----------------------------------------------------------|-------------------------------|-----------------------------------------------------------|
| COOLING (Btu/Hr):          |                                                           | HEATING (Btu/Hr):             |                                                           |
| Rated:(Min/Max):           | 21,600 (9,000 / 26,000)                                   | 47° Rated:(Min/Max):          | 24,000 ( / )                                              |
| Sensible AHRI:             |                                                           | 17° Rated:                    | Add MSS                                                   |
| Moisture Removal (Gal/Hr): |                                                           | 5° Max:                       | Add MSS                                                   |
| Standard Operating Range:  | 50°F - 115°F                                              | Operating Range:              | -13°F - 64°F                                              |
| Extended Operating Range:  | °F - °F                                                   | 47° Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |
| Rated Cooling Conditions:  | Indoor (°F DB/DB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 | 17° Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |

| ELECTRICAL                                                              |                    |                      | PIPING                                    |                       |
|-------------------------------------------------------------------------|--------------------|----------------------|-------------------------------------------|-----------------------|
| Power Supply (V/Hz/Ph):<br>*See Engineering Manuals for other voltages. | *208-230 / 60 / 1  |                      | Gas Connection (in):                      | 5/8                   |
| System MCA:                                                             | 19.8               |                      | Liquid Connection (in):                   | 1/4                   |
| System MFA:                                                             | 20.0               |                      | Drain Connection (in):                    |                       |
| Compressor RLA:                                                         |                    |                      | Max. Interunit Piping Length (ft):        | 98.5                  |
| Outdoor fan motor FLA:                                                  | 0.6                |                      | Max. Interunit Height Difference (ft):    | 82                    |
| Outdoor fan motor W:                                                    | 123.0              |                      | Refrigerant Pre-Charged Pipe Length (ft): | 49.2                  |
| Indoor fan motor FLA:                                                   |                    |                      | Additional Charge of Refrigerant (oz/ft): | 0.22                  |
| Indoor fan motor W:                                                     | 123.0              |                      |                                           |                       |
| MCA: Min.circuit amps                                                   | MFA: Max.fuse amps | RLA: Rated load amps |                                           |                       |
|                                                                         |                    |                      | FLA: Full load amps                       | W: Rated output watts |




Submittal Data Sheet

Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Ductless ODU  
RXM24WVJU9

| INDOOR SPECIFICATIONS         |       |                            |                               |       |           |
|-------------------------------|-------|----------------------------|-------------------------------|-------|-----------|
| COOLING - Airflow Rate (cfm): |       |                            | HEATING - Airflow Rate (cfm): |       |           |
| High:                         | 2,179 | Med:                       | High:                         | 2,119 | Med:      |
| Low:                          | 1,833 | SuperLow:                  | Low:                          | 1,833 | SuperLow: |
| Sound Pressure (H) (dBA):     |       | 55                         | Sound Pressure (H) (dBA):     |       | 56        |
| Dimensions (HxWxD) (in):      |       | 28-15/16 x 34-1/4 x 12-5/8 | Net Weight (lb):              |       | 132       |

DIMENSIONAL DRAWING - INDOOR UNIT

RXM24WVJU9

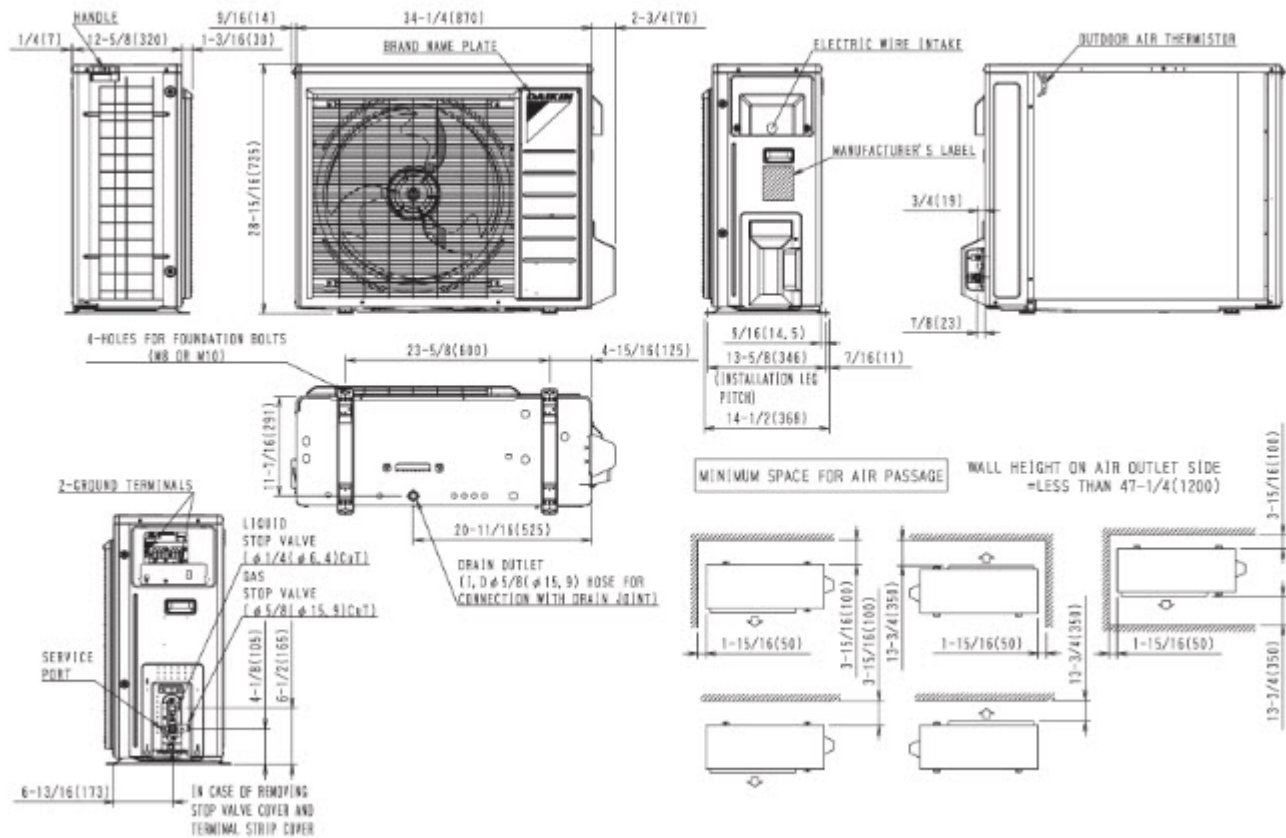




Submittal Data Sheet

Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Ductless ODU  
RXM24WVJU9

| OUTDOOR SPECIFICATIONS        |                            |                               |              |
|-------------------------------|----------------------------|-------------------------------|--------------|
| COOLING - Airflow Rate (cfm): |                            | HEATING - Airflow Rate (cfm): |              |
| High:                         | 2,179                      | High:                         | 2,119        |
| SuperLow:                     |                            | SuperLow:                     |              |
| Compressor Stage:             | Inverter                   | Refrigerant Type:             | R-32         |
| Factory Charge (Lbs):         | 2.98                       | Refrigerant Oil:              | PVE (FVC50K) |
| Sound Pressure Level (dBA):   | 55                         |                               |              |
| Dimensions (HxWxD) (in):      | 28-15/16 x 34-1/4 x 12-5/8 | Net Weight (lb):              | 132          |

DIMENSIONAL DRAWING - OUTDOOR UNIT

RXM24WVJU9

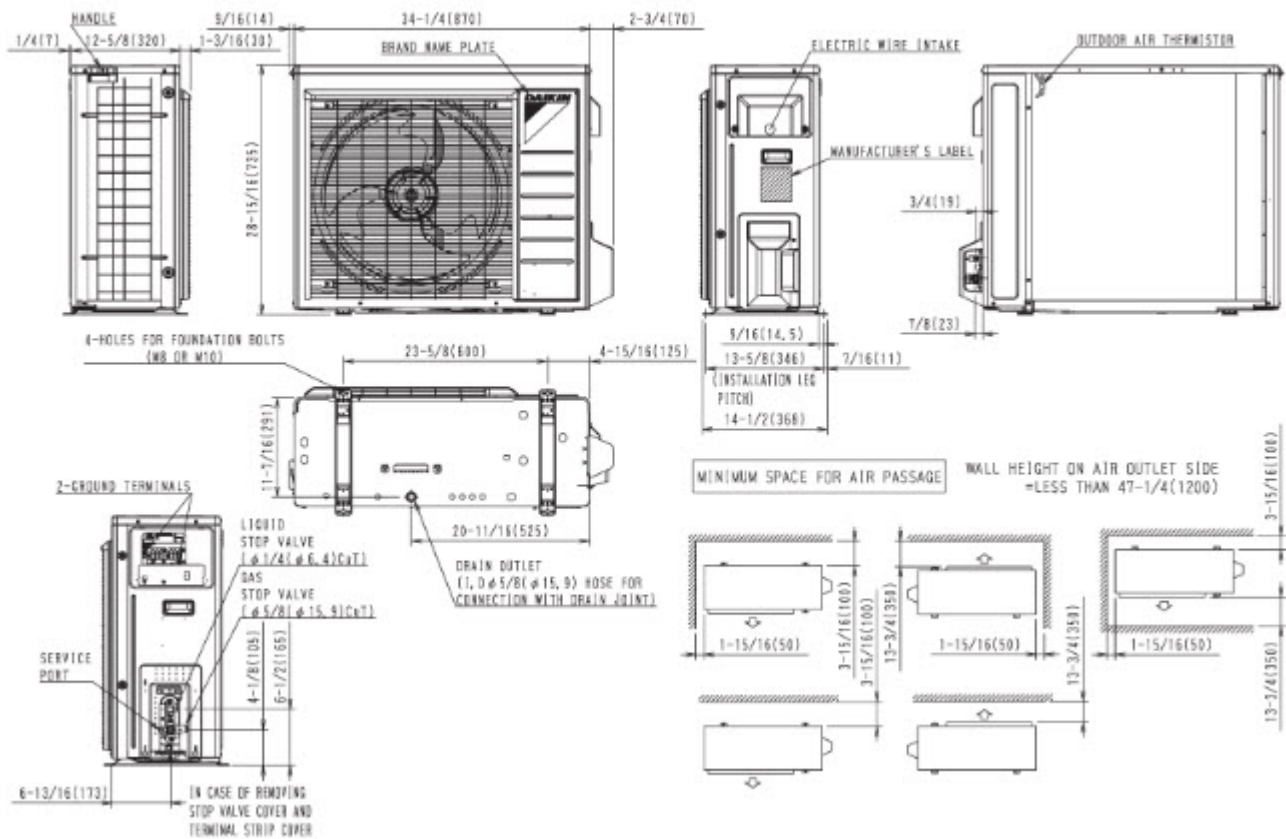



**Submittal Data Sheet**

Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Ductless ODU  
RXM24WVJU9

ACCESSORIES

| PART NUMBER | DESCRIPTION                                 | INCLUDED |
|-------------|---------------------------------------------|----------|
| DACA-WB-3   | Powder-Coated Wall-Mounted Bracket          | No       |
| KEH063A4EA  | Bml LRg Drain Pan Heater Rev A              | No       |
| KKG063A42   | Back protection wire net                    | No       |
| KKP937A4    | Drain Plug for OD Unit                      | No       |
| KPS063A41   | Snow hood (intake side plate) (15, 18 & 24) | No       |
| KPS063A44   | Snow hood (intake rear plate) (15,18 & 24)  | No       |
| KPS063A47   | Snow hood (outlet) (15, 18 & 24)            | No       |
| KPW063B4    | Air direction adjustment grille             | No       |