



Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

FEATURES

- Flare less joint
- 15A Circuit Breaker
- Removable Drain Pan
- Daikin Swing compressor with Inverter
- Indoor Unit Quiet Operation
- Auto Defrost, Auto Fan Speed and Suto Restart (after power failure)
- Program Dry function
- Wide Angle Louvers and Vertical Auto Swing
- Energy Saving Function
- Sleep Mode

BENEFITS

- Easier, Faster and more reliable installtion with Flareless joint
- 15A circuit breaker only needs one space in Electrical Panel.
- Precharged for up to 50'
- 12 year Warranty
- R-32 is Easy, Proven, Efficient and Available
- Simple maintenance
- Reduced power consumption
- Addordable cost saving solution
- Blue fin protection increases life span of outdoor unit.

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTXQ09ASBU9	Indoor Unit Name:	Daikin Oterra 115V R-32 -- 9K Indoor High Wall Unit
Outdoor Unit Model No.	RXQ09ASBU9	Outdoor Unit Name:	Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton
Rated Cooling Capacity (Btu/hr):	9,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	8,140	Rated Piping Length(ft):	50
Max/Min Cooling Capacity (Btu/hr):	10,500 / 2,800	Rated Height Difference (ft):	50.00
Cooling Input Power (kW):	1.110	Heating Input Power (kW):	1.18
SEER2 (Non-Ducted/Ducted):	20.00 /	HSPF2 (Non-Ducted/Ducted):	9.0 /
EER2 (Non-Ducted/Ducted):	12.00 /		
Rated Heating Capacity (Btu/hr):	10,900	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	1.15	Heating Operation Range (°F WB):	5 - 65
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	50
Pre-charge Piping (Length) (ft):	50	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	66		
Max Height Separation (Ind to Ind ft):	50		


Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	424/307/261/134
Power Supply Connections:	4	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-1/4 x 30-5/16 x 8-3/4	Condensate Connection (inch):	5/8
Net Weight (lb):	18	Sound Pressure (H/M/L/SL) (dBA):	43/35/30/21
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

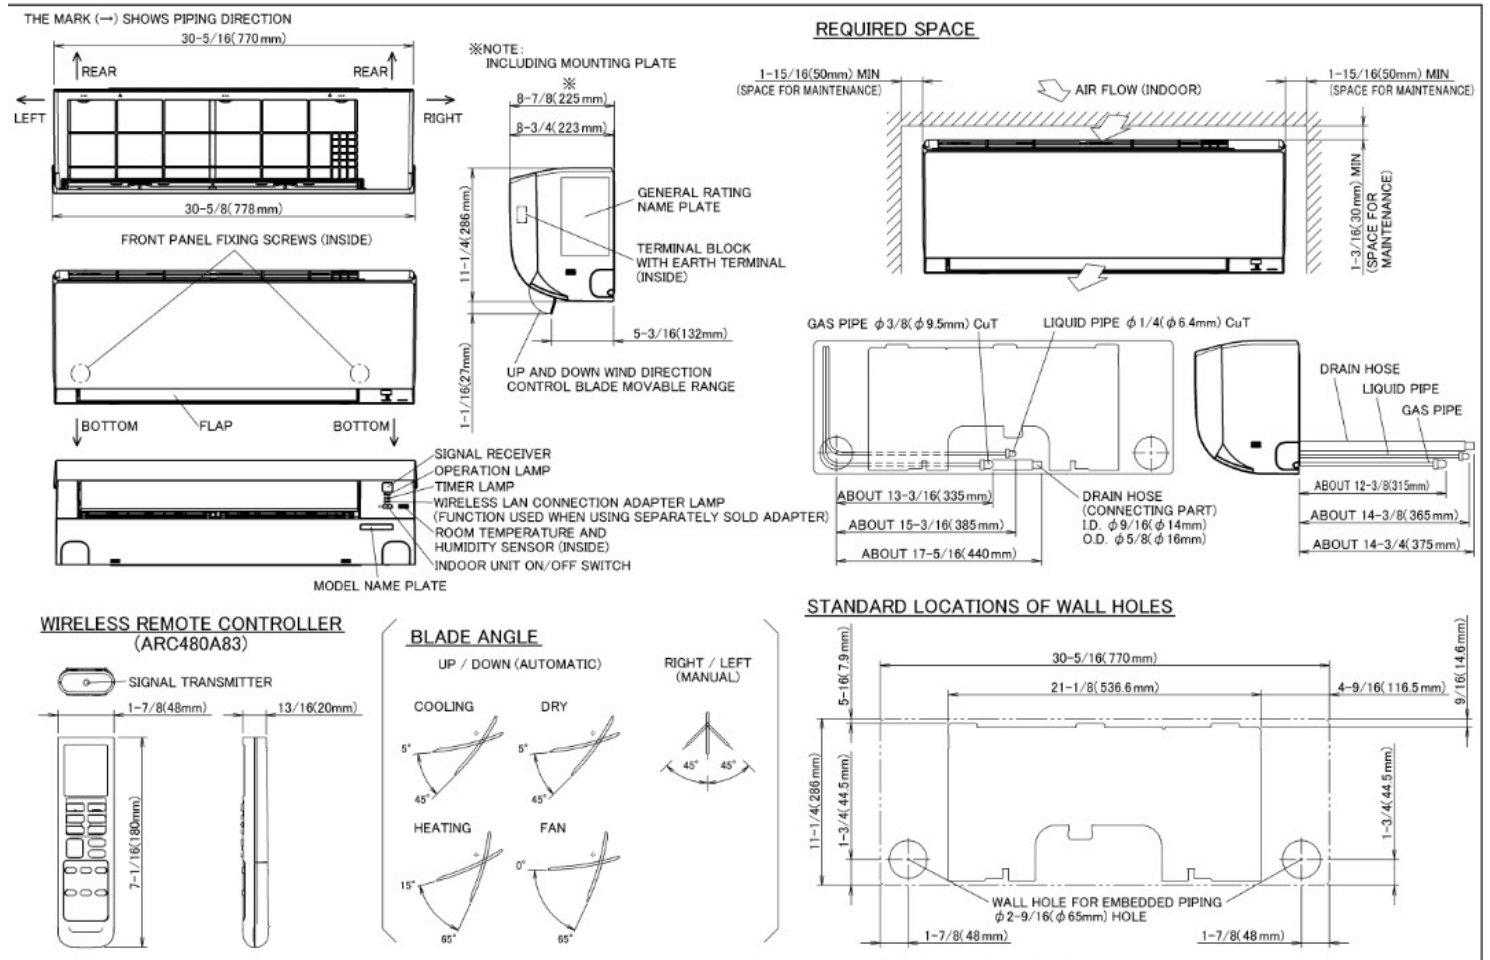


Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	4	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	14.9	Airflow Rate (H) (CFM):	1233
Max Overcurrent Protection (MOP) (A):	15	Gas Pipe Connection (inch):	3/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	48
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16	Sound Power Level (dBA):	
Net Weight (lb):	59		

DIMENSIONAL DRAWING - OUTDOOR UNIT

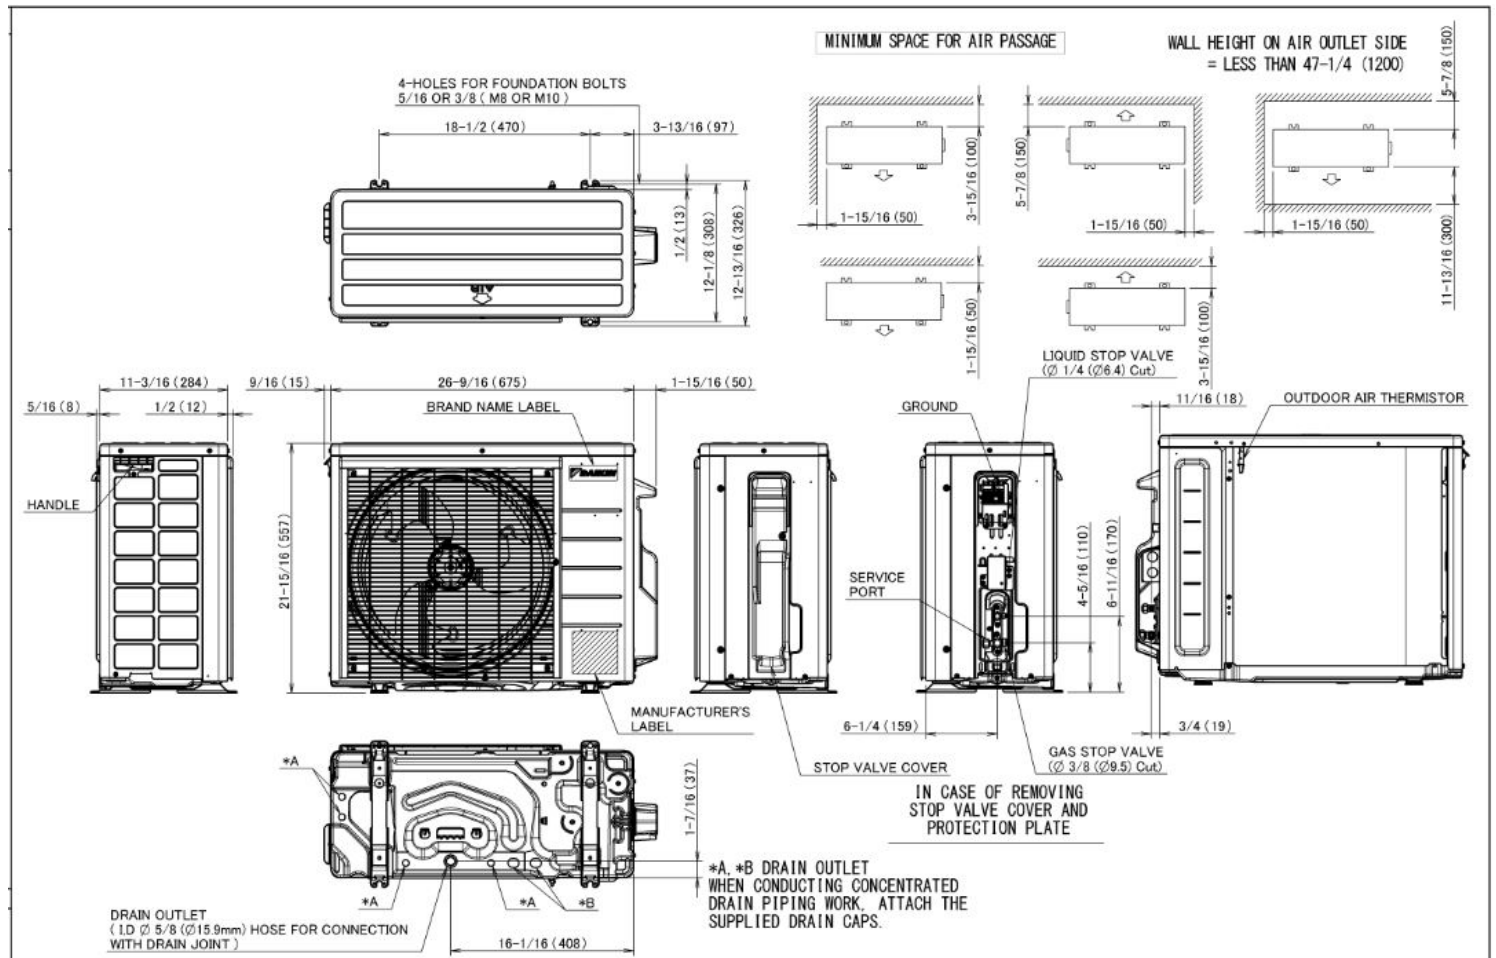



Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AZAI6WSPDKC	DKN Plus Interface	No
BRC073A6	Wired Remote Controller	No
BRC944B2	Wired Remote Controller	No
BRCW901A03	BRC944B2 CONTROL CABLE, 10FT	No
BRCW901A08	Wired Remote Controller Cord - 8m/26ft	No
BRP084A61	Wi-Fi Adapter	No
DCS301C71	Unified On/Off Controller	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	No
KRP067A41E	Adaptor for wired remote controller	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KKG067A41	Back protection wire net (09 & 12)	No
KKP937A4	Drain Plug for OD Unit	No
KPS067A41	Snow hood (intake side plate) (09 & 12)	No
KPS067A42	Snow hood (intake rear plate) (09 & 12)	No
KPS067A44	Snow hood (outlet) (09 & 12)	No
KPW937F4	Air direction adjustment grille (09 & 12)	No