



**Submittal Data Sheet**

Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton  
RXQ09ASBU9

**FEATURES**

- Swing Compressor
- Inverter system
- Reluctance DC Motor
- PAM Control
- Automatic Defrosting
- Anticorrosion treatment on Heat Exchanger

**BENEFITS**

- Quiet Outdoor Unit
- Long Compressor Life
- Saves on Energy cost
- Efficient operation

**INDOOR UNIT**



**OUTDOOR UNIT**





Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton  
RXQ09ASBU9

| EFFICIENCY: |          |
|-------------|----------|
| COOLING:    | HEATING: |
| SEER        | HSPF     |
| EER         | COP      |

| PERFORMANCE:               |                                                           |                               |                                                           |
|----------------------------|-----------------------------------------------------------|-------------------------------|-----------------------------------------------------------|
| COOLING (Btu/Hr):          |                                                           | HEATING (Btu/Hr):             |                                                           |
| Rated:(Min/Max):           | 9,000 (2,800 / 10,500)                                    | 47° Rated:(Min/Max):          | 10,900 ( / )                                              |
| Sensible AHRI:             |                                                           | 17° Rated:                    | Add MSS                                                   |
| Moisture Removal (Gal/Hr): |                                                           | 5° Max:                       | Add MSS                                                   |
| Standard Operating Range:  | 50°F - 115°F                                              | Operating Range:              | 5°F - 65°F                                                |
| Extended Operating Range:  | °F - °F                                                   | 47° Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |
| Rated Cooling Conditions:  | Indoor (°F DB/DB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 | 17° Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |

| ELECTRICAL              |                    |                      | PIPING                                         |                       |
|-------------------------|--------------------|----------------------|------------------------------------------------|-----------------------|
| Power Supply (V/Hz/Ph): |                    | 115 / 60 / 1         | Gas Connection (in): 3/8                       |                       |
| System MCA:             |                    | 14.9                 | Liquid Connection (in): 1/4                    |                       |
| System MFA:             |                    | 15.0                 | Drain Connection (in): 5/8                     |                       |
| Compressor RLA:         |                    |                      | Max. Interunit Piping Length (ft): 66          |                       |
| Outdoor fan motor FLA:  |                    |                      | Max. Interunit Height Difference (ft): 50      |                       |
| Outdoor fan motor W:    |                    |                      | Refrigerant Pre-Charged Pipe Length (ft): 50   |                       |
| Indoor fan motor FLA:   |                    |                      | Additional Charge of Refrigerant (oz/ft): 0.22 |                       |
| Indoor fan motor W:     |                    |                      |                                                |                       |
| MCA: Min.circuit amps   | MFA: Max.fuse amps | RLA: Rated load amps |                                                |                       |
|                         |                    |                      | FLA: Full load amps                            | W: Rated output watts |




Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton  
RXQ09ASBU9

| INDOOR SPECIFICATIONS         |                              |                               |    |
|-------------------------------|------------------------------|-------------------------------|----|
| COOLING - Airflow Rate (cfm): |                              | HEATING - Airflow Rate (cfm): |    |
| High:                         | 1,233                        | Med:                          |    |
| Low:                          |                              | SuperLow:                     |    |
| Sound Pressure (H) (dBA):     | 48                           | Sound Pressure (H) (dBA):     | 49 |
| Dimensions (HxWxD) (in):      | 21-15/16 x 26-9/16 x 11-3/16 | Net Weight (lb):              | 59 |

DIMENSIONAL DRAWING - INDOOR UNIT

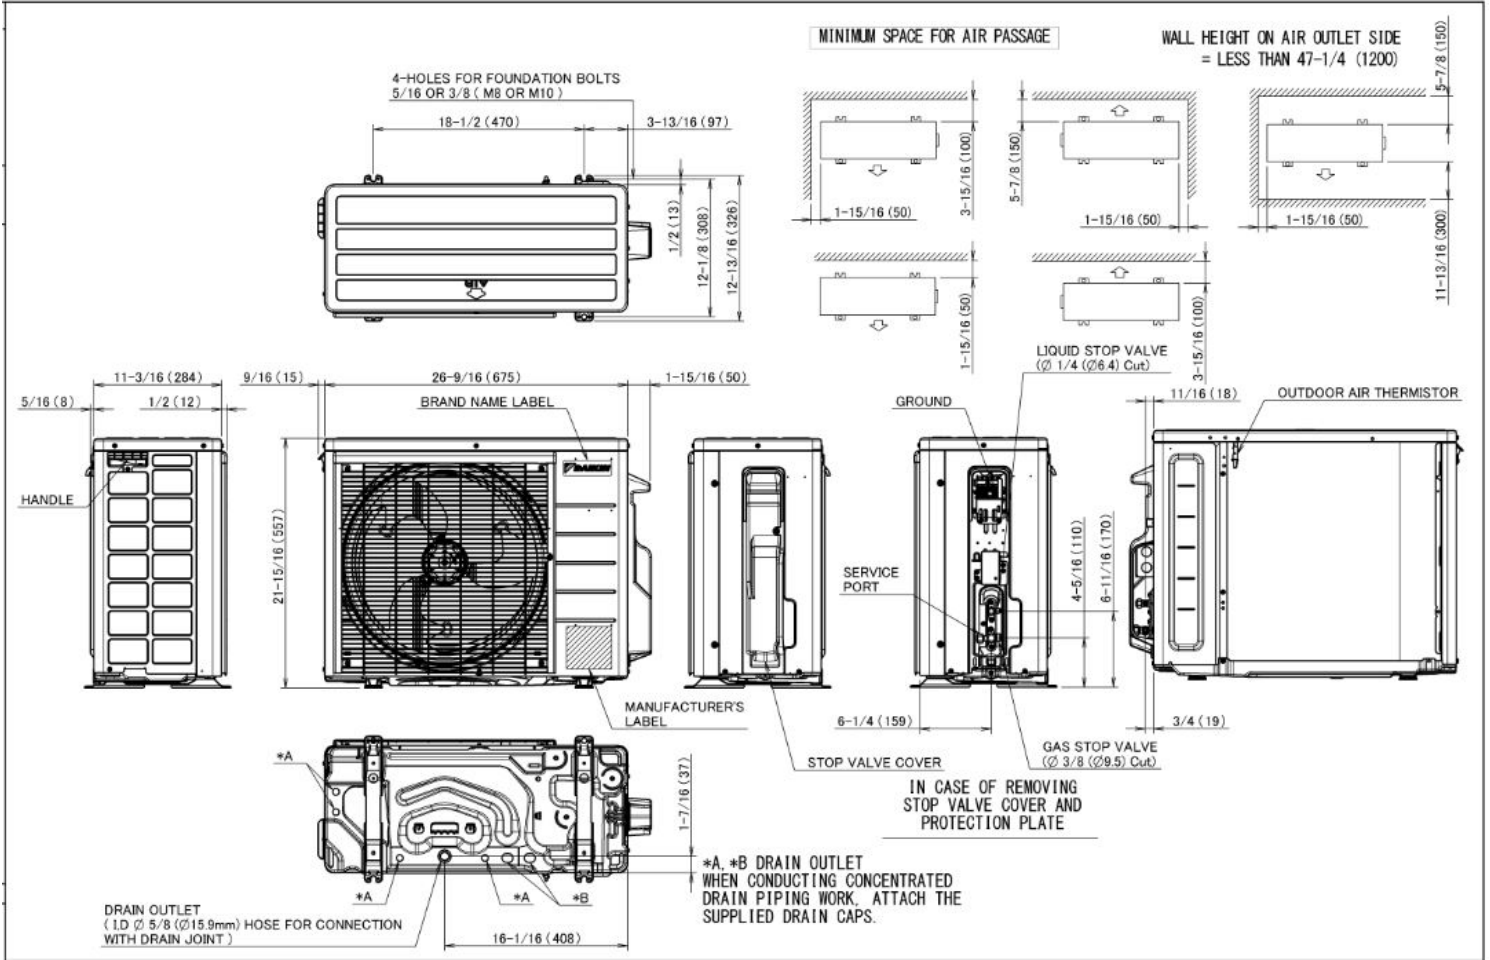




Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton  
RXQ09ASBU9

| OUTDOOR SPECIFICATIONS        |                              |                               |       |
|-------------------------------|------------------------------|-------------------------------|-------|
| COOLING - Airflow Rate (cfm): |                              | HEATING - Airflow Rate (cfm): |       |
| High:                         | 1,233                        | High:                         | 1,151 |
| SuperLow:                     |                              | SuperLow:                     |       |
| Compressor Stage:             | Inverter                     | Refrigerant Type:             | R-32  |
| Factory Charge (Lbs):         | 1.15                         | Refrigerant Oil:              |       |
| Sound Pressure Level (dBA):   | 48                           |                               |       |
| Dimensions (HxWxD) (in):      | 21-15/16 x 26-9/16 x 11-3/16 | Net Weight (lb):              | 59    |

DIMENSIONAL DRAWING - OUTDOOR UNIT

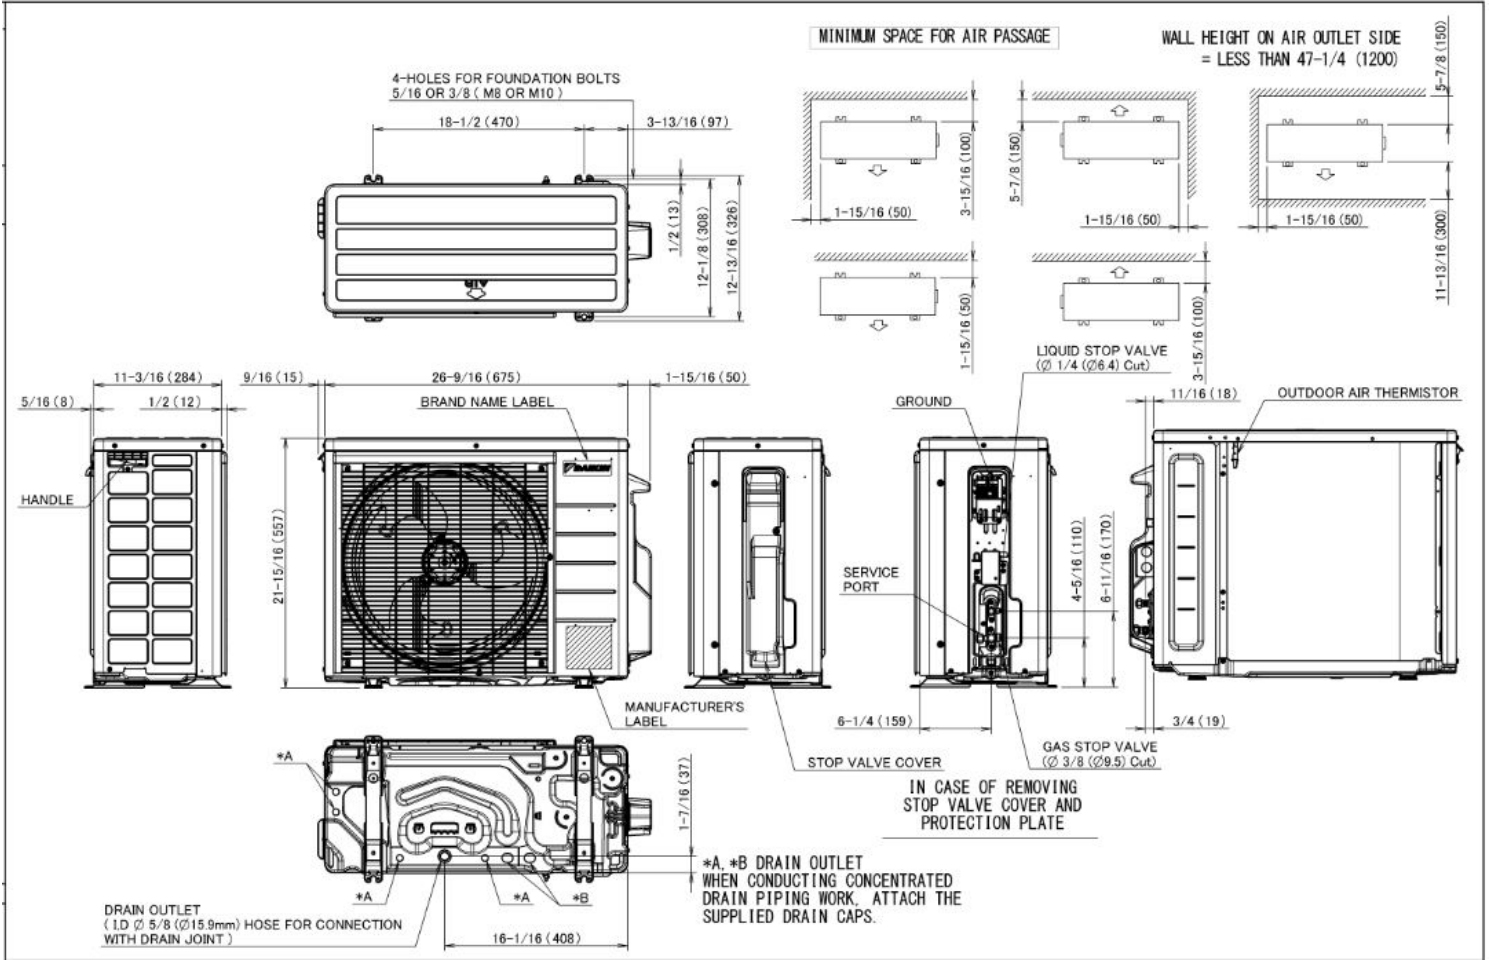



Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton  
RXQ09ASBU9

ACCESSORIES

| PART<br>NUMBER | DESCRIPTION                               | INCLUDED |
|----------------|-------------------------------------------|----------|
| KKG067A41      | Back protection wire net (09 & 12)        | No       |
| KKP937A4       | Drain Plug for OD Unit                    | No       |
| KPS067A41      | Snow hood (intake side plate) (09 & 12)   | No       |
| KPS067A42      | Snow hood (intake rear plate) (09 & 12)   | No       |
| KPS067A44      | Snow hood (outlet) (09 & 12)              | No       |
| KPW937F4       | Air direction adjustment grille (09 & 12) | No       |