



Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 1 Ton
RXQ12ASBU9

FEATURES

- Swing Compressor
- Inverter system
- Reluctance DC Motor
- PAM Control
- Automatic Defrosting
- Anticorrosion treatment on Heat Exchanger

BENEFITS

- Quiet Outdoor Unit
- Long Compressor Life
- Saves on Energy cost
- Efficient operation

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 1 Ton
RXQ12ASBU9

EFFICIENCY:	
COOLING:	HEATING:
SEER	HSPF
EER	COP

PERFORMANCE:			
COOLING (Btu/Hr):		HEATING (Btu/Hr):	
Rated:(Min/Max):	12,000 (3,600 / 12,800)	47° Rated:(Min/Max):	13,500 (/)
Sensible AHRI:		17° Rated:	Add MSS
Moisture Removal (Gal/Hr):		5° Max:	Add MSS
Standard Operating Range:	50°F - 115°F	Operating Range:	5°F - 65°F
Extended Operating Range:	°F - °F	47° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	17° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph):	115 / 60 / 1	Gas Connection (in):	3/8
System MCA:	15.0	Liquid Connection (in):	1/4
System MFA:	15.0	Drain Connection (in):	5/8
Compressor RLA:		Max. Interunit Piping Length (ft):	50
Outdoor fan motor FLA:		Max. Interunit Height Difference (ft):	50
Outdoor fan motor W:		Refrigerant Pre-Charged Pipe Length (ft):	50
Indoor fan motor FLA:		Additional Charge of Refrigerant (oz/ft):	0.22
Indoor fan motor W:			
MCA: Min.circuit amps	MFA: Max.fuse amps	RLA: Rated load amps	
		FLA: Full load amps	W: Rated output watts




Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 1 Ton
RXQ12ASBU9

INDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,144	Med:	
Low:		SuperLow:	
Sound Pressure (H) (dBA):	50	Sound Pressure () (dBA):	
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16	Net Weight (lb):	64

DIMENSIONAL DRAWING - INDOOR UNIT

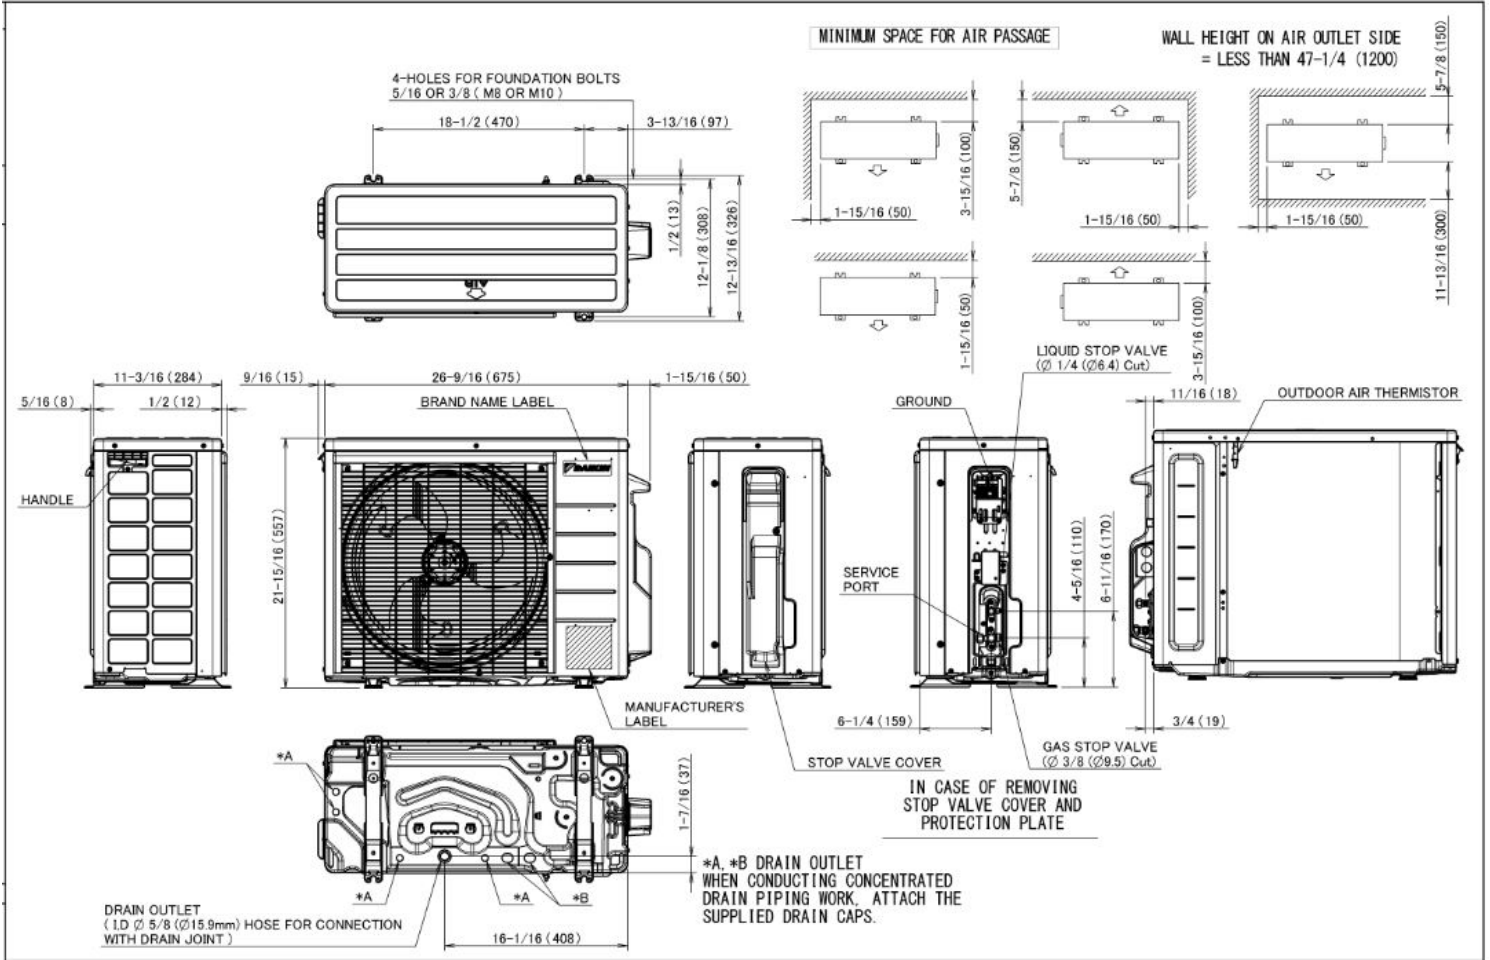




Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 1 Ton
RXQ12ASBU9

OUTDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,144	High:	1,144
SuperLow:		SuperLow:	
Compressor Stage:	Inverter	Refrigerant Type:	R-32
Factory Charge (Lbs):	1.65	Refrigerant Oil:	
Sound Pressure Level (dBA):	50		
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16	Net Weight (lb):	64

DIMENSIONAL DRAWING - OUTDOOR UNIT

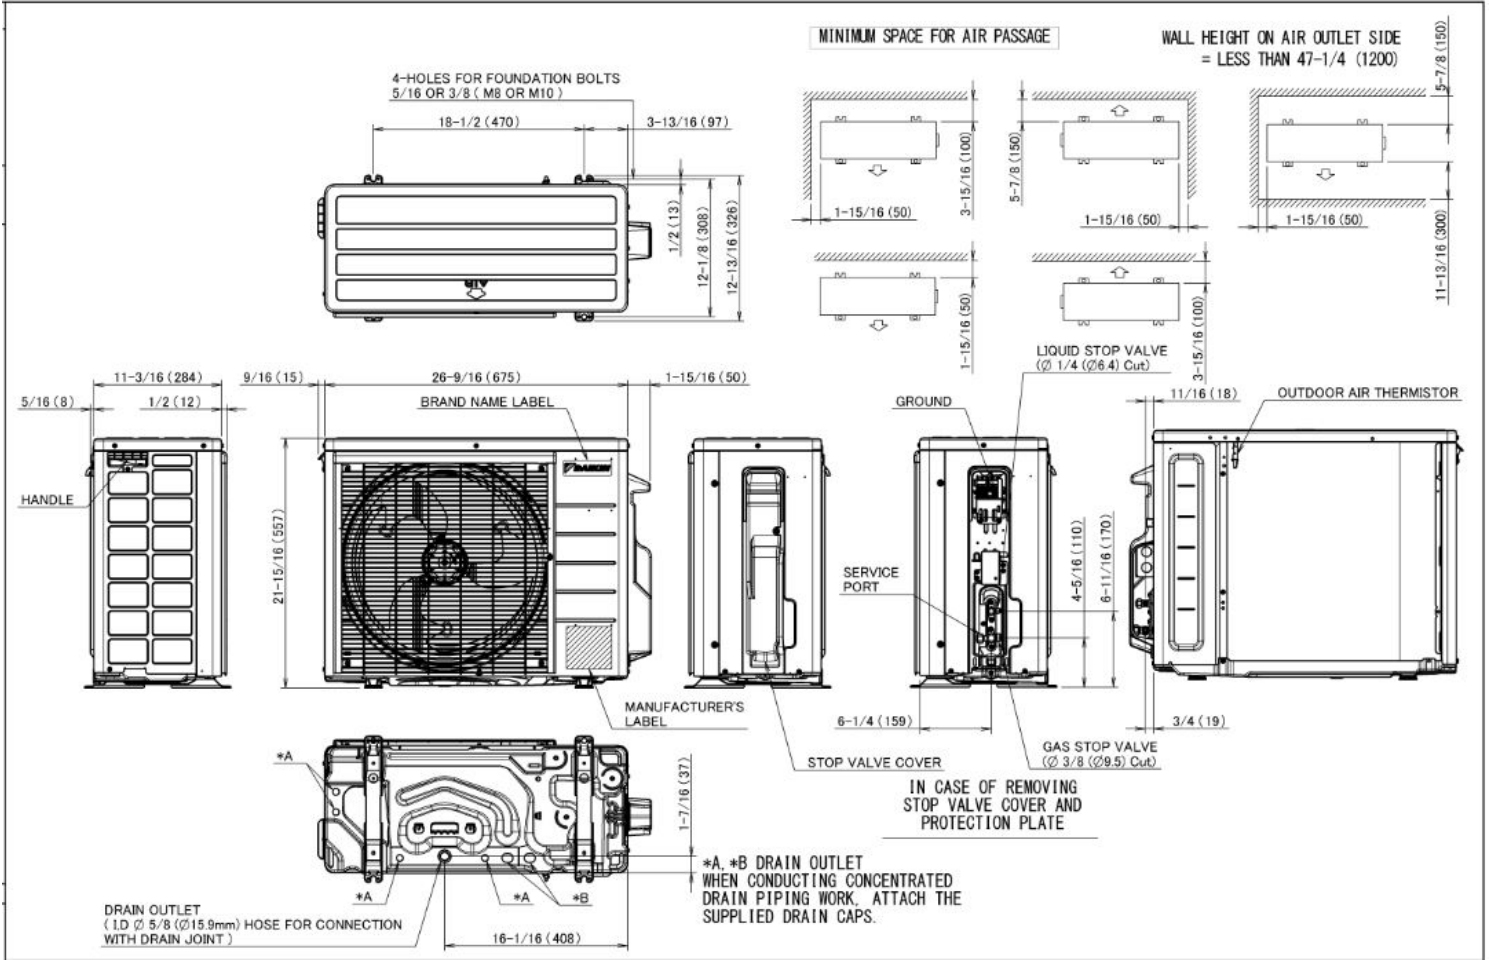



Submittal Data Sheet

Daikin Oterra 115V Heat Pump Ductless ODU 1 Ton
RXQ12ASBU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KKG067A41	Back protection wire net (09 & 12)	No
KKP937A4	Drain Plug for OD Unit	No
KPS067A41	Snow hood (intake side plate) (09 & 12)	No
KPS067A42	Snow hood (intake rear plate) (09 & 12)	No
KPS067A44	Snow hood (outlet) (09 & 12)	No
KPW937F4	Air direction adjustment grille (09 & 12)	No