



Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 0.75 Ton, Daikin AURORA R-32
RXT09AVJU9

FEATURES

- Swing Inverter Compressor
- Extended Operating Range and Capacity
- Automatic Defrost

BENEFITS

- 12 Year Registered Residential Warranty
- 5 Year Commercial Warranty
- Cooling 50-115F
- Heating -13-60F

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 0.75 Ton, Daikin AURORA R-32
RXT09AVJU9

EFFICIENCY:	
COOLING:	HEATING:
SEER	HSPF
EER	COP

PERFORMANCE:			
COOLING (Btu/Hr):		HEATING (Btu/Hr):	
Rated:(Min/Max):	9,000 (4,400 / 11,200)	47° Rated:(Min/Max):	10,900 (/)
Sensible AHRI:		17° Rated:	Add MSS
Moisture Removal (Gal/Hr):		5° Max:	Add MSS
Standard Operating Range:	50°F - 115°F	Operating Range:	-13°F - 60°F
Extended Operating Range:	-4°F - °F	47° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	17° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43


ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection (in):	3/8
System MCA:	11.6	Liquid Connection (in):	1/4
System MFA:	15.0	Drain Connection (in):	5/8
Compressor RLA:		Max. Interunit Piping Length (ft):	66
Outdoor fan motor FLA:		Max. Interunit Height Difference (ft):	49.25
Outdoor fan motor W:		Refrigerant Pre-Charged Pipe Length (ft):	49.25
Indoor fan motor FLA:		Additional Charge of Refrigerant (oz/ft):	0.22
Indoor fan motor W:			
MCA: Min.circuit amps	MFA: Max.fuse amps	RLA: Rated load amps	
			FLA: Full load amps W: Rated output watts

Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 0.75 Ton, Daikin AURORA R-32
RXT09AVJU9

INDOOR SPECIFICATIONS					
COOLING - Airflow Rate (cfm):			HEATING - Airflow Rate (cfm):		
High:	1,088	Med:	High:	1,006	Med:
Low:		SuperLow:	Low:		SuperLow:
Sound Pressure (H) (dBA):	49		Sound Pressure (H) (dBA):	51	
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16		Net Weight (lb):	63	

DIMENSIONAL DRAWING - INDOOR UNIT

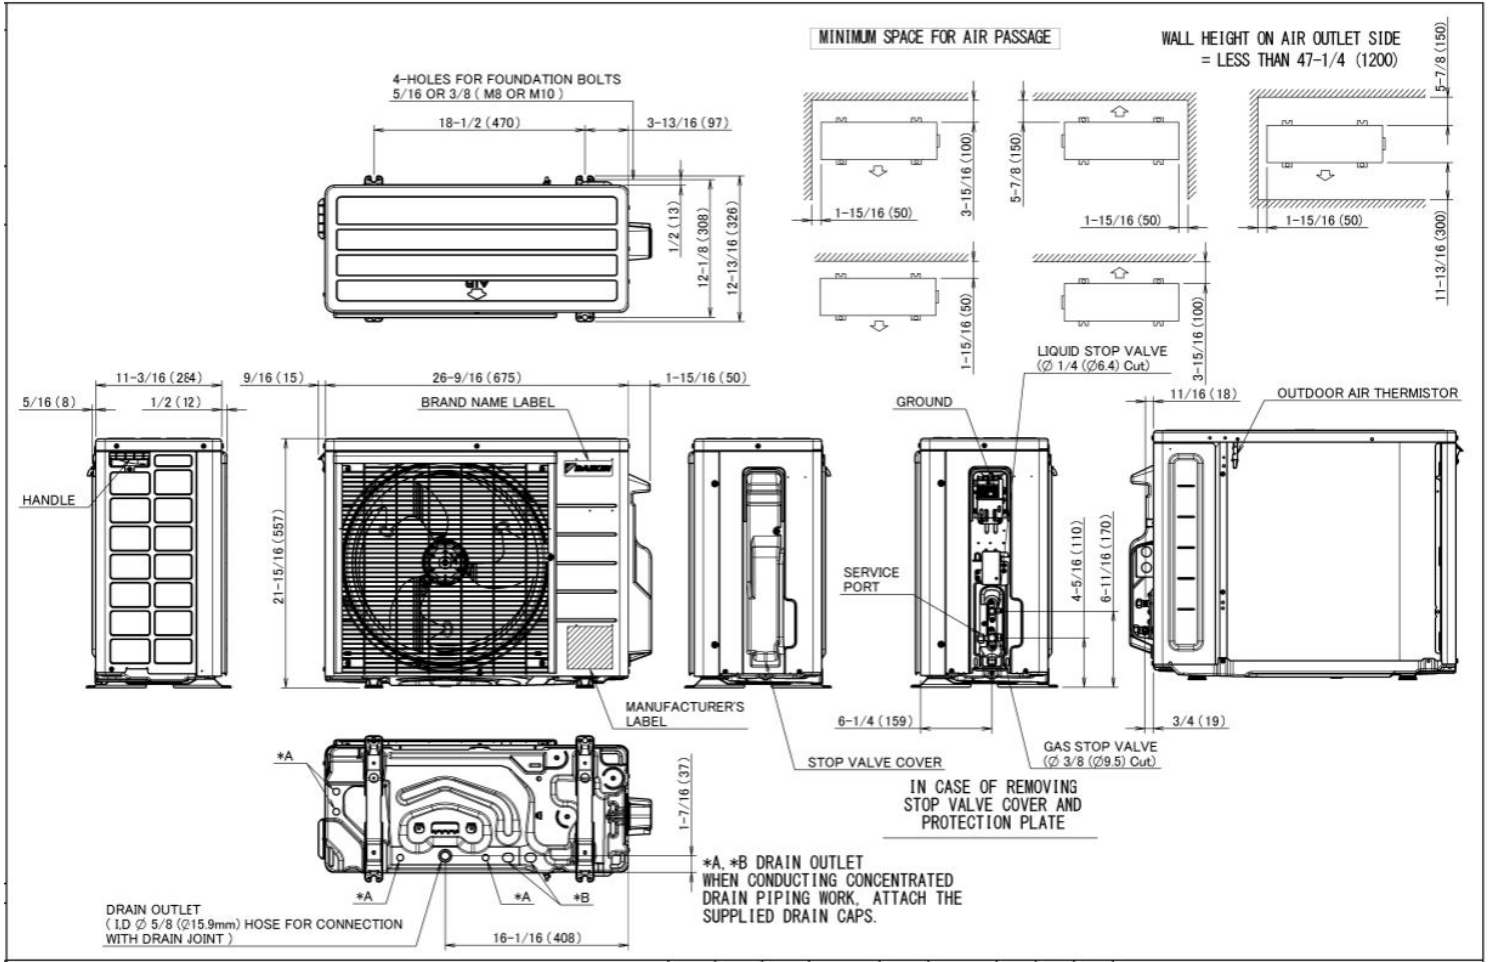




Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 0.75 Ton, Daikin AURORA R-32
RXT09AVJU9

OUTDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,088	High:	1,006
SuperLow:		SuperLow:	
Compressor Stage:	Inverter	Refrigerant Type:	R-32
Factory Charge (Lbs):	1.65 lbs	Refrigerant Oil:	PVE (FVC50K)
Sound Pressure Level (dBA):	49		
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16	Net Weight (lb):	63

DIMENSIONAL DRAWING - OUTDOOR UNIT

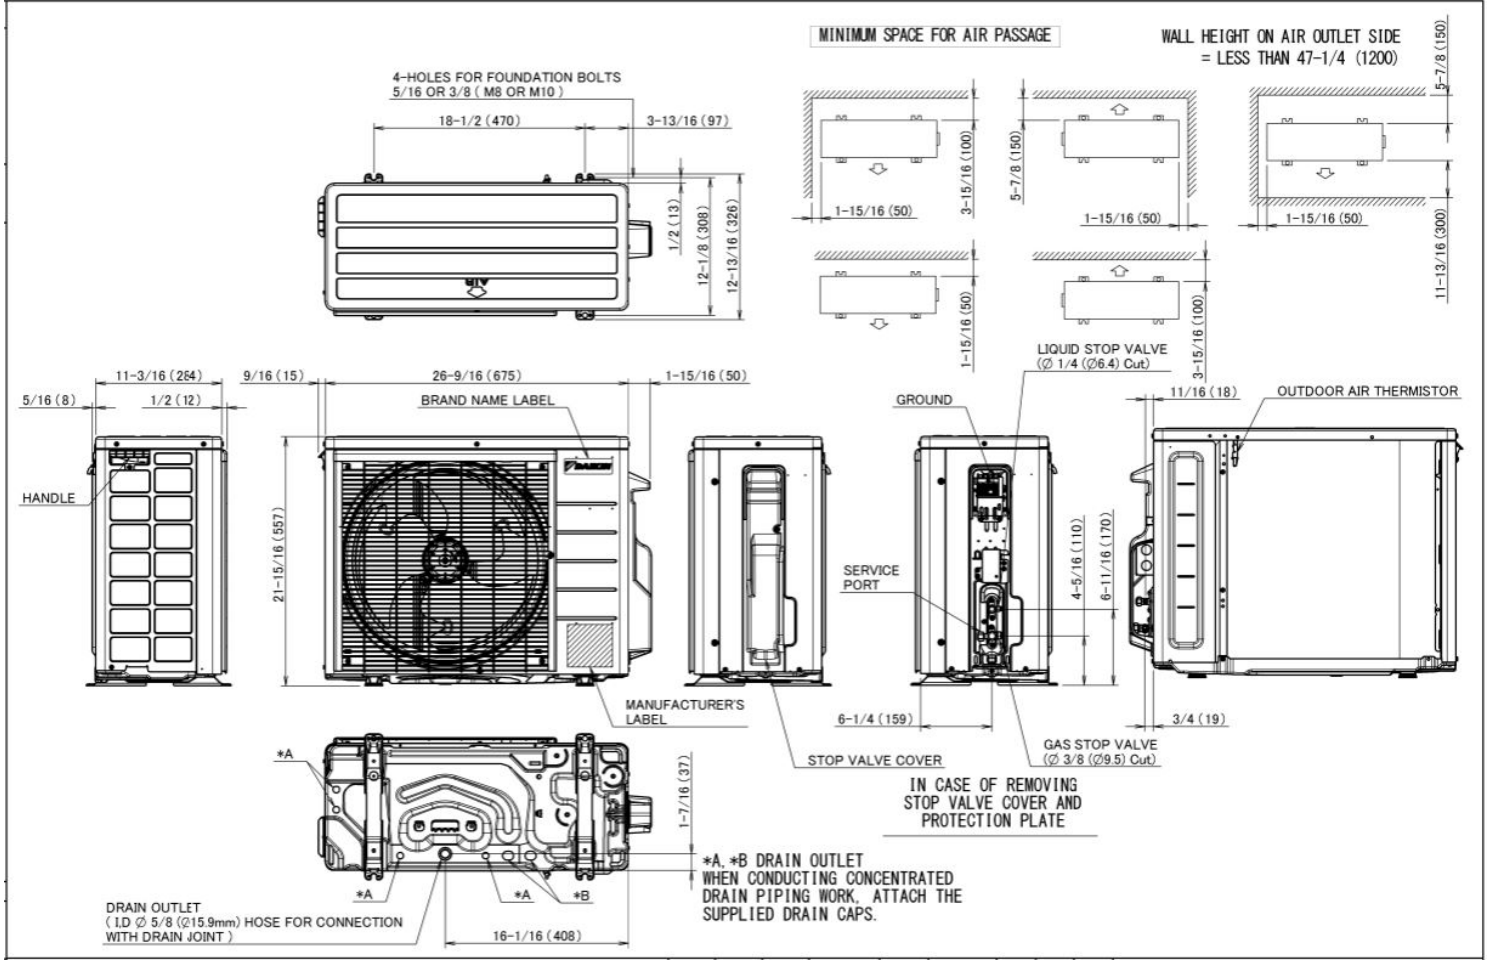



Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 0.75 Ton, Daikin AURORA R-32
RXT09AVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH068A41	Drain Pan Heater	No
KKG067A41	Back protection wire net (09 & 12)	No
KPS067A41	Snow hood (intake side plate) (09 & 12)	No
KPS067A42	Snow hood (intake rear plate) (09 & 12)	No
KPS067A44	Snow hood (outlet) (09 & 12)	No
KPW937F4	Air direction adjustment grille (09 & 12)	No