



**Submittal Data Sheet**

21.0 SEER2, Heat Pump, Ductless ODU, 2.0 Ton, Daikin AURORA R-32  
RXT24AVJU9

**FEATURES**

- Swing Inverter Compressor
- Extended Operating Range and Capacity
- Automatic Defrost

**BENEFITS**

- 12 Year Registered Residential Warranty
- 5 Year Commercial Warranty
- Cooling 50-115F
- Heating -13-60F

**INDOOR UNIT**

**OUTDOOR UNIT**





Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 2.0 Ton, Daikin AURORA R-32  
RXT24AVJU9

| EFFICIENCY: |          |
|-------------|----------|
| COOLING:    | HEATING: |
| SEER        | HSPF     |
| EER         | COP      |

| PERFORMANCE:               |                                                           |                               |                                                           |
|----------------------------|-----------------------------------------------------------|-------------------------------|-----------------------------------------------------------|
| COOLING (Btu/Hr):          |                                                           | HEATING (Btu/Hr):             |                                                           |
| Rated:(Min/Max):           | 22,400 (7,000 / 26,400)                                   | 47° Rated:(Min/Max):          | 24,000 ( / )                                              |
| Sensible AHRI:             |                                                           | 17° Rated:                    | Add MSS                                                   |
| Moisture Removal (Gal/Hr): |                                                           | 5° Max:                       | Add MSS                                                   |
| Standard Operating Range:  | 50°F - 115°F                                              | Operating Range:              | -13°F - 60°F                                              |
| Extended Operating Range:  | -4°F - °F                                                 | 47° Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |
| Rated Cooling Conditions:  | Indoor (°F DB/DB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 | 17° Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |

| ELECTRICAL                                                              |                    |                      | PIPING                                                 |                       |
|-------------------------------------------------------------------------|--------------------|----------------------|--------------------------------------------------------|-----------------------|
| Power Supply (V/Hz/Ph):<br>*See Engineering Manuals for other voltages. |                    | *208-230 / 60 / 1    | Gas Connection (in):<br><br>5/8                        |                       |
| System MCA:                                                             |                    | 21.6                 | Liquid Connection (in):<br><br>1/4                     |                       |
| System MFA:                                                             |                    | 25.0                 | Drain Connection (in):<br><br>5/8                      |                       |
| Compressor RLA:                                                         |                    |                      | Max. Interunit Piping Length (ft):<br><br>98.5         |                       |
| Outdoor fan motor FLA:                                                  |                    |                      | Max. Interunit Height Difference (ft):<br><br>65.6     |                       |
| Outdoor fan motor W:                                                    |                    |                      | Refrigerant Pre-Charged Pipe Length (ft):<br><br>49.25 |                       |
| Indoor fan motor FLA:                                                   |                    |                      | Additional Charge of Refrigerant (oz/ft):<br><br>0.22  |                       |
| Indoor fan motor W:                                                     |                    |                      |                                                        |                       |
| MCA: Min.circuit amps                                                   | MFA: Max.fuse amps | RLA: Rated load amps |                                                        |                       |
|                                                                         |                    |                      | FLA: Full load amps                                    | W: Rated output watts |




Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 2.0 Ton, Daikin AURORA R-32  
RXT24AVJU9

| INDOOR SPECIFICATIONS         |                          |           |                               |       |
|-------------------------------|--------------------------|-----------|-------------------------------|-------|
| COOLING - Airflow Rate (cfm): |                          |           | HEATING - Airflow Rate (cfm): |       |
| High:                         | 2,383                    | Med:      | High:                         | 2,327 |
| Low:                          |                          | SuperLow: | Low:                          |       |
| Sound Pressure (H) (dBA):     | 55                       |           | Sound Pressure (H) (dBA):     | 57    |
| Dimensions (HxWxD) (in):      | 29-1/2 x 34-1/4 x 12-5/8 |           | Net Weight (lb):              | 127   |

DIMENSIONAL DRAWING - INDOOR UNIT

RXT15/18AVJU9

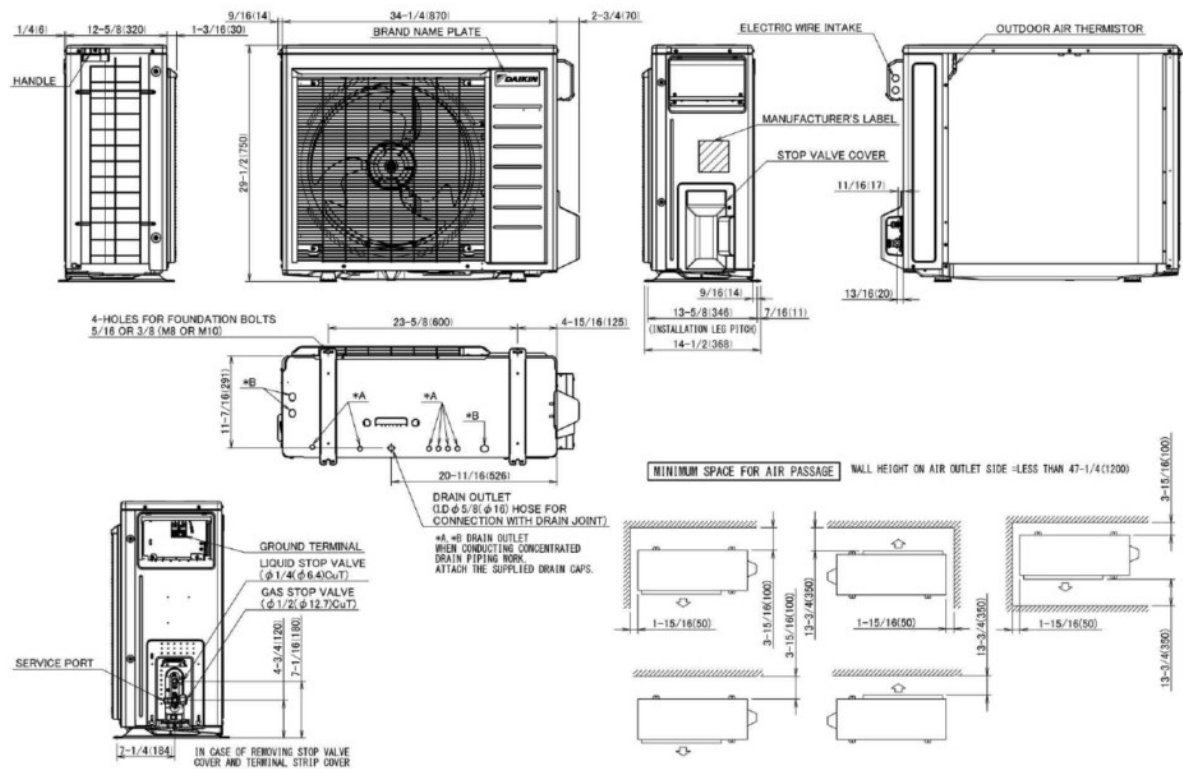

3D150942




Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 2.0 Ton, Daikin AURORA R-32  
RXT24AVJU9

| OUTDOOR SPECIFICATIONS        |                          |                               |              |
|-------------------------------|--------------------------|-------------------------------|--------------|
| COOLING - Airflow Rate (cfm): |                          | HEATING - Airflow Rate (cfm): |              |
| High:                         | 2,383                    | High:                         | 2,327        |
| SuperLow:                     |                          | SuperLow:                     |              |
| Compressor Stage:             | Inverter                 | Refrigerant Type:             | R-32         |
| Factory Charge (Lbs):         | 3.04 lbs                 | Refrigerant Oil:              | PVE (FVC50K) |
| Sound Pressure Level (dBA):   | 55                       |                               |              |
| Dimensions (HxWxD) (in):      | 29-1/2 x 34-1/4 x 12-5/8 | Net Weight (lb):              | 127          |

DIMENSIONAL DRAWING - OUTDOOR UNIT

RXT15/18AVJU9

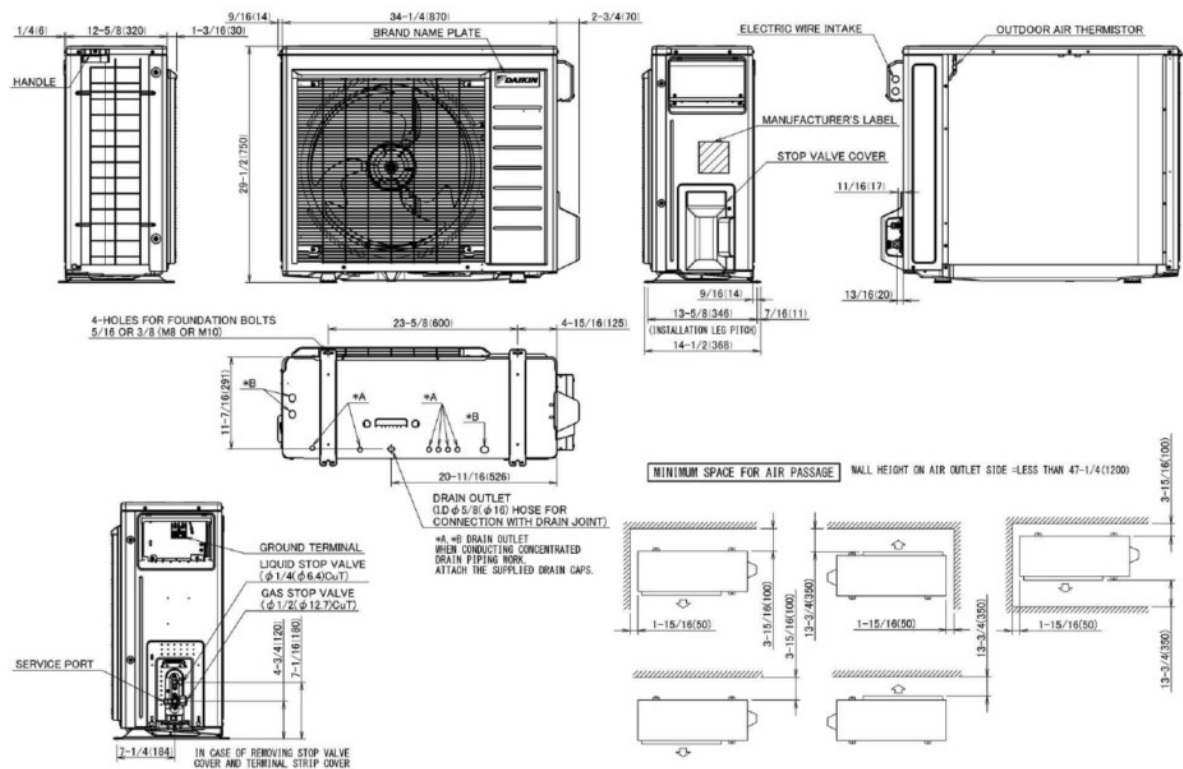

3D150942



Submittal Data Sheet

21.0 SEER2, Heat Pump, Ductless ODU, 2.0 Ton, Daikin AURORA R-32  
RXT24AVJU9

ACCESSORIES

| PART<br>NUMBER | DESCRIPTION                                 | INCLUDED |
|----------------|---------------------------------------------|----------|
| DACA-WB-3      | Powder-Coated Wall-Mounted Bracket          | No       |
| KEH064A41      | Drain Pan Heater                            | No       |
| KPS063A41      | Snow hood (intake side plate) (15, 18 & 24) | No       |
| KPS063A44      | Snow hood (intake rear plate) (15,18 & 24)  | No       |
| KPS063A47      | Snow hood (outlet) (15, 18 & 24)            | No       |
| KPW063B4       | Air direction adjustment grille             | No       |