



Submittal Data Sheet

Daikin ATMOSPHERA 1.0-Ton, Heat Pump, Ductless ODU
RXM12WVJU9

FEATURES

- Inverter Technology delivers precise temperature control and superior energy efficiency

BENEFITS

- 12 year limited parts and compressor warranty

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

Daikin ATMOSPHERA 1.0-Ton, Heat Pump, Ductless ODU
RXM12WVJU9

EFFICIENCY:	
COOLING:	HEATING:
SEER	HSPF
EER	COP

PERFORMANCE:			
COOLING (Btu/Hr):		HEATING (Btu/Hr):	
Rated:(Min/Max):	12,000 (4,800 / 16,000)	47° Rated:(Min/Max):	13,600 (/)
Sensible AHRI:		17° Rated:	Add MSS
Moisture Removal (Gal/Hr):		5° Max:	Add MSS
Standard Operating Range:	50°F - 115°F	Operating Range:	-13°F - 64°F
Extended Operating Range:	°F - °F	47° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Cooling Conditions:	Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	17° Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection (in):	3/8
System MCA:	12.3	Liquid Connection (in):	1/4
System MFA:	15.0	Drain Connection (in):	
Compressor RLA:		Max. Interunit Piping Length (ft):	82
Outdoor fan motor FLA:	0.3	Max. Interunit Height Difference (ft):	65.625
Outdoor fan motor W:		Refrigerant Pre-Charged Pipe Length (ft):	49.2
Indoor fan motor FLA:		Additional Charge of Refrigerant (oz/ft):	0.22
Indoor fan motor W:			
MCA: Min.circuit amps	MFA: Max.fuse amps	RLA: Rated load amps	
		FLA: Full load amps	W: Rated output watts




Submittal Data Sheet

Daikin ATMOSPHERA 1.0-Ton, Heat Pump, Ductless ODU
RXM12WVJU9

INDOOR SPECIFICATIONS				
COOLING - Airflow Rate (cfm):			HEATING - Airflow Rate (cfm):	
High:	1,487	Med:	High:	1,487
Low:	1,317	SuperLow:	Low:	1,487
Sound Pressure (H) (dBA):		49	Sound Pressure (H) (dBA):	
Dimensions (HxWxD) (in):		23-7/16 x 33-1/4 x 11-13/16	Net Weight (lb):	
			96	

DIMENSIONAL DRAWING - INDOOR UNIT

RXM09/12WVJU9

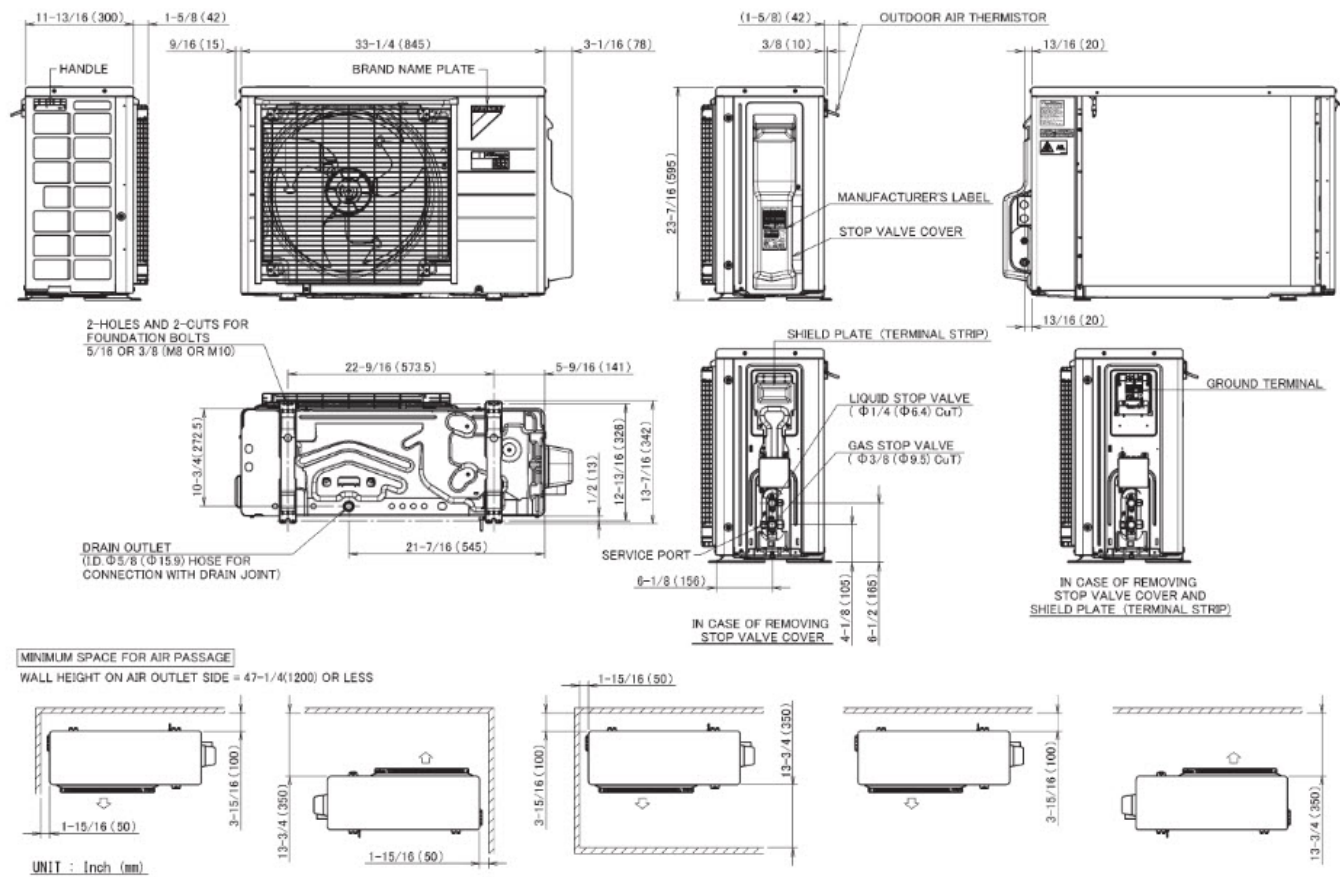




Submittal Data Sheet

Daikin ATMOSPHERA 1.0-Ton, Heat Pump, Ductless ODU
RXM12WVJU9

OUTDOOR SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	1,487	High:	1,487
SuperLow:		SuperLow:	
Compressor Stage:	Inverter	Refrigerant Type:	R-32
Factory Charge (Lbs):	2.16	Refrigerant Oil:	PVE (FVC50K)
Sound Pressure Level (dBA):	49		
Dimensions (HxWxD) (in):	23-7/16 x 33-1/4 x 11-13/16	Net Weight (lb):	96

DIMENSIONAL DRAWING - OUTDOOR UNIT

RXM09/12WVJU9

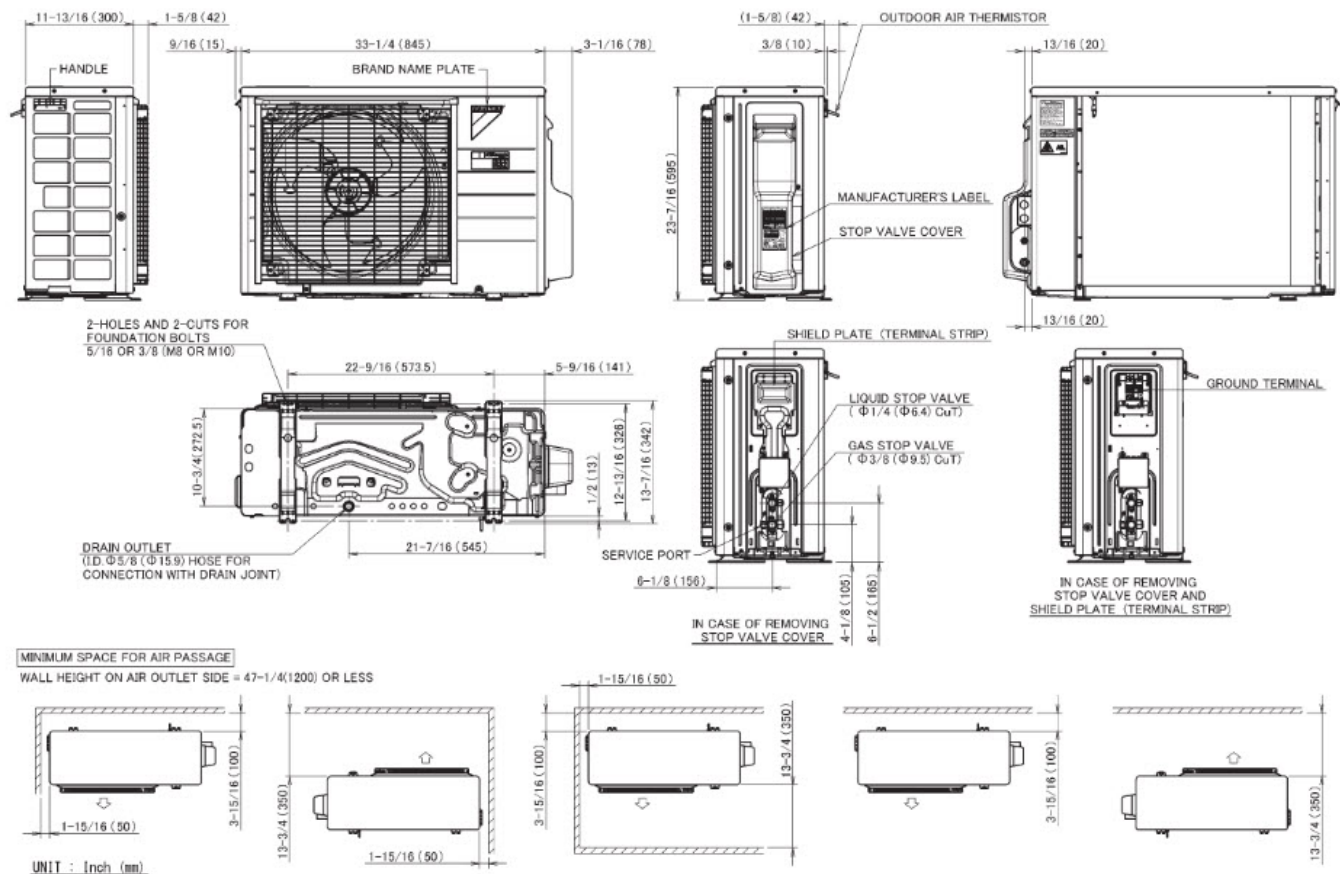



Submittal Data Sheet

Daikin ATMOSPHERA 1.0-Ton, Heat Pump, Ductless ODU
RXM12WVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH094A41E	Drain pan heater SF2	No
KKG020A41	Back protection wire net SF2	No
KKP937A4	Drain Plug for OD Unit	No
KPS034A41	Snow hood (intake side plate) SF2	No
KPS034A43	Snow hood (outlet) SF2	No
KPS034D42	Snow hood (intake rear plate) SF2	No
KPW937F4E	Air direction adjustment grille SF2	No